


NONCODED TOOLS

ADJUSTERS- II


DESCRIPTION

→PLUNGER ARM, AECo H-10001-3←

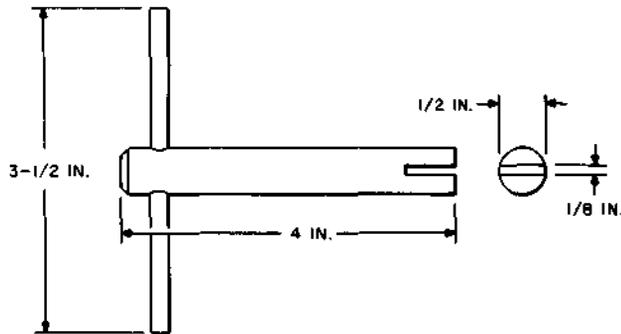


For use on plunger-type line and out-trunk switches.

R-2142

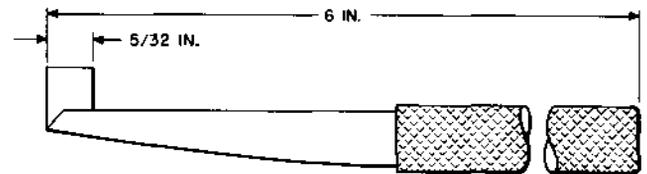


For use on sequence switches and 157-type interrupters.

→R-1760←

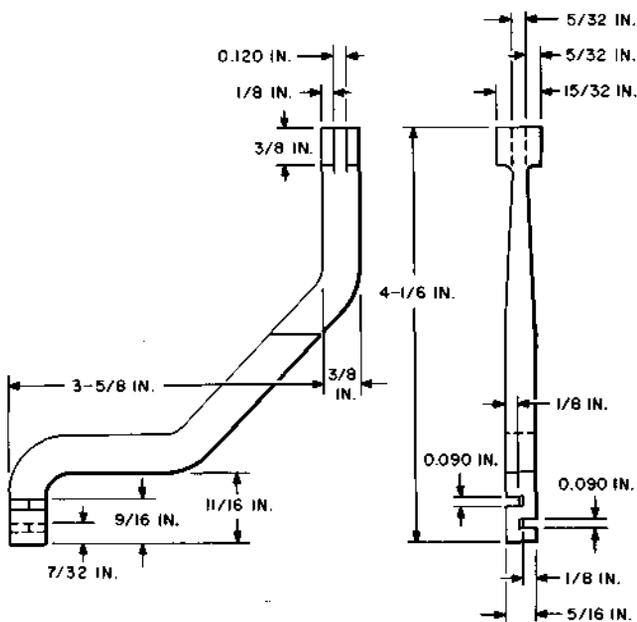


For use on 200-, 206-, 209-, and 211-type selectors, 25-point rotary switches, and 1-type translators.

R-2753

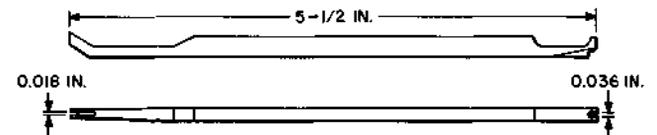

For adjusting cover spring on AF-, AG-, AJ-, and AK-type relays.

R-2830

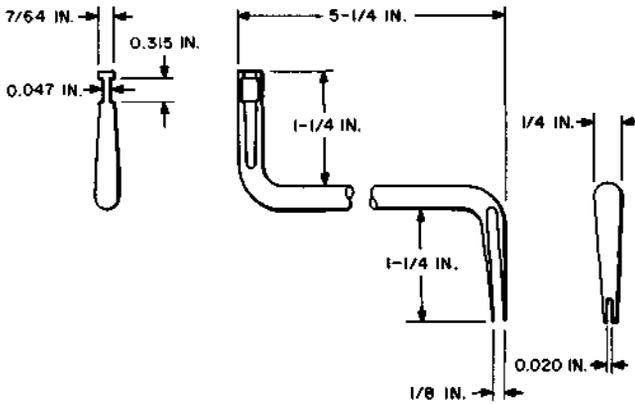

Similar to the 380A tool except that the openings shown at left in the above illustration are wider. For use on panel multiple brushes in cases where the 380A tool cannot be used because of brush springs being too wide.

R-63773

Replaced by the 379A tool.


SEPARATOR, MAGNETIC, D-167912

Replaced by the 671A tool.

SPRING, AECo H-20777

Replaced by the 416B tool.

SPRING, AECo H-7066

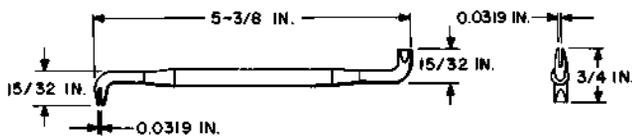


For use on step-by-step type relays and 197-, 198-type switches.

SPRING, D-157398


Replaced by the 506B tool.

SPRING, FINGER, TRIP, D-159676

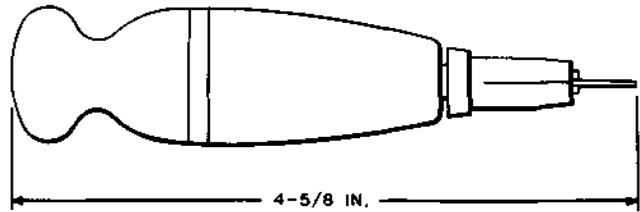

Six needles are furnished with each tool. For use on panel elevator apparatus.

SPRING, R-3159

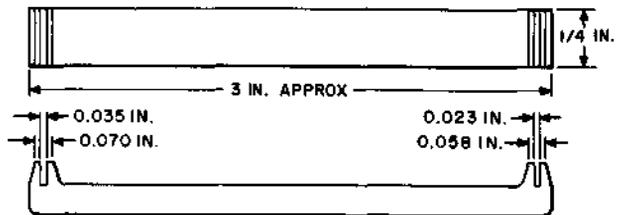


For use in adjusting normal post springs on 197-type switches.

SPRING, R-55760

Replaced by the 380A tool.

SPRING, R-69710

Replaced by the 371 tool.

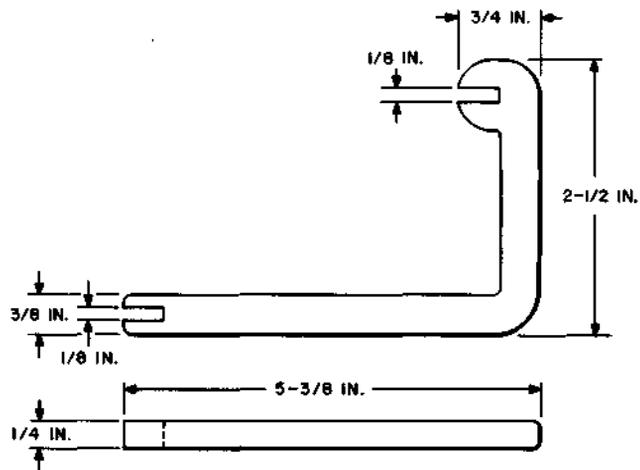VERTICAL ARMATURE, AECo H-13398-1

Replaces the AECo H-7056 armature adjuster. For use on 197- and 198-type switches.