


NONCODED TOOLS
FIXTURES
DESCRIPTION

→ FIXTURE, ALIGNING, R-2003. (Includes 2 Detail 2 and 1 Detail 3 unless otherwise specified in order.)

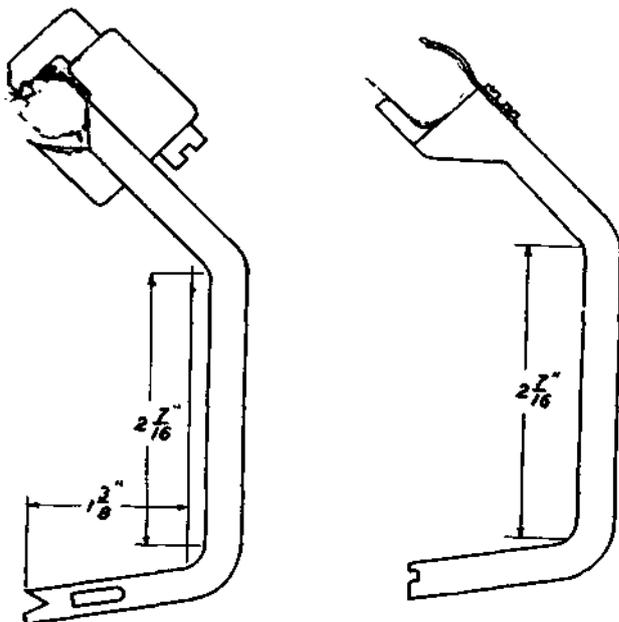


Detail 2

Detail 3

For use on vertical drive shafts.


FIXTURE, CLAMPING, INDICATOR R-2039.

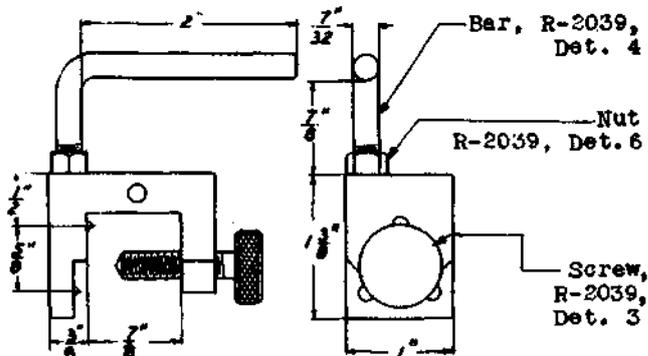

For use on vertical drive shafts and associated apparatus.


FIXTURE, LOCATING, SHAFT, R-1648, DET. 1.
Replaced by the No. 120A gauge.

FIXTURE, SHAFT-STRAIGHTENING, R-80238.

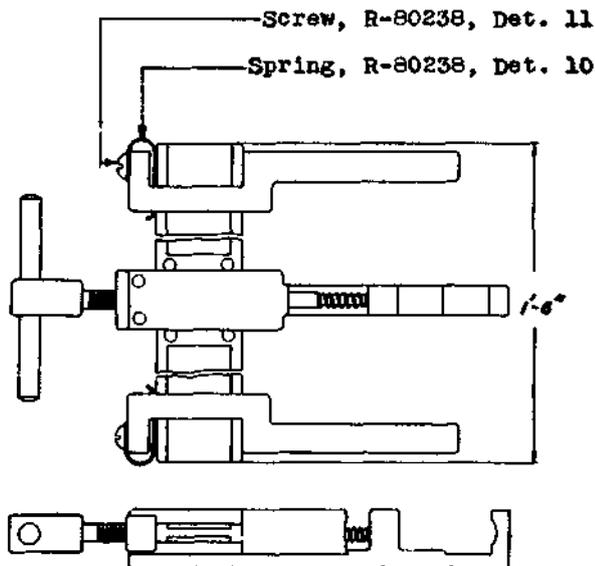

For use on vertical drive shafts and associated apparatus.

FIXTURE, SWITCH-SUPPORTING, A.E.CO. 26221.

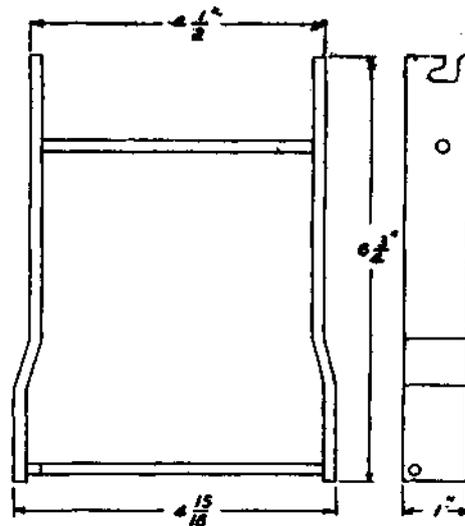

For use on step-by-step type relays and 197 and 198 type switches.