


NONCODED TOOLS
FLASHLIGHTS
DESCRIPTION


FLASHLIGHT (Spec. AT-7311-X)
Replaced by Flashlight (Type C)

Note: KS-14250, L12, bottom cap may be obtained for use on both the prefocused and diffused models of the replaced flashlights. The KS-14250, L13, lens may be obtained for use with the prefocused flashlight but is not recommended for the diffused model.

→ FLASHLIGHTS
In ordering, specify type B or C as desired.

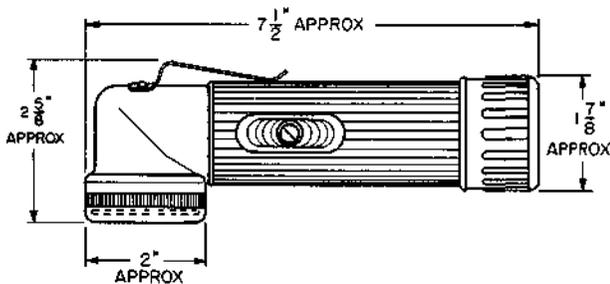

C FLASHLIGHT

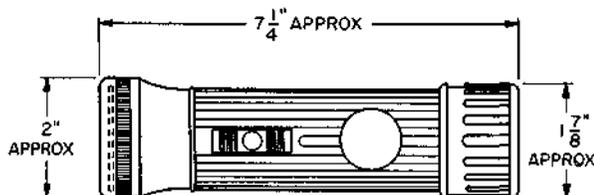

B FLASHLIGHT


Operates on two KS-5622 dry cells. Dry cells not furnished with flashlight.

Prefocused flashlights. These flashlights have a black case, clear lens, slide-type off-on switch, reflector, PR6 lamp and spare lamp holder with a PR6 type lamp in the end cap.

Type	Length	Diameter
B - straight	8"	2-1/2"
C - angle, equipped with a belt clip	8"	2-3/4"

C-type replaces Flashlight (Spec. AT-7311-X.)
For general use.
(Spec. AT-7724)

→ FLASHLIGHT, KS-14250, L1.

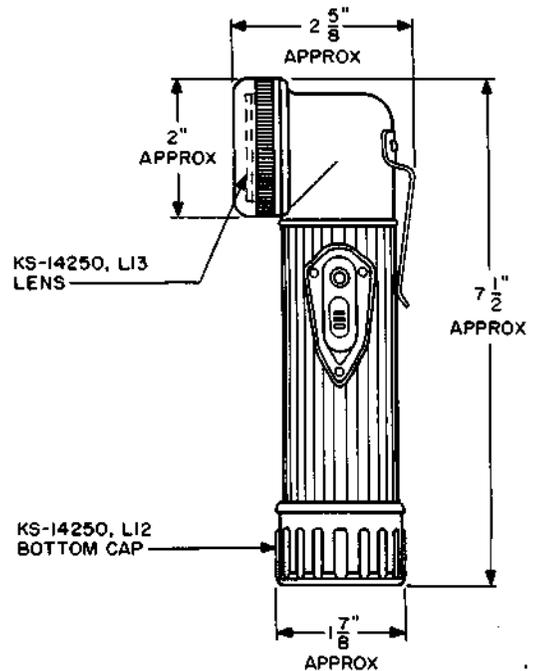

Operates on two KS-6522 dry cells. Dry cells not furnished with flashlight.

May be provided with a plastic or shatter-proof lens, a special bottom cap and a PR6 bulb. The terminals in the cap are intended for insertion in 360-type tools which cause the switching arrangement to open the circuit, so that with the flashlight switch operated, lighting the bulb depends upon a closure between the leads attached to the 360-type tools.

The following parts may be obtained separately:
KS-14250, L11 flashlight body
KS-14250, L12 bottom cap
KS-14250, L13 lens
PR6 bulb

The KS-14250, L12 bottom cap replaces KS-7742 bottom cap used with flashlights previously specified.

For general use.