

REPLACING PAGE ADDENDUM
Filing Instructions:

1. REMOVE FROM THE SECTION THE PAGES NUMBERED THE SAME AS THOSE ATTACHED TO THIS PINK SHEET.
2. INSERT THE ATTACHED PAGES INTO THE SECTION IN THEIR PLACE.
3. PLACE THIS PINK SHEET AHEAD OF PAGE 1 OF THE SECTION.

52-TYPE HEAD TELEPHONE SETS
PIECE-PART DATA, REPLACEMENT PROCEDURES, AND MINOR REPAIRS

1. GENERAL

1.001 This addendum supplements Section 028-360-811, Issue 9. The attached pages must be inserted in the section in accordance with filing instructions above.

1.002 This addendum is issued to replace the KS-8010 switch with the 240A switch when used with the L4BY headset cord.

2. PIECE-PART DATA

The following change applies to Part 2 of this section:

- (a) Table C—revised.

Attached:

Page 3 dated September 1973, revised
Page 4 dated September 1973, reissued

TABLE C
52-TYPE HEAD TELEPHONE SET COMPONENTS

HEAD TELEPHONE SET	XMTR UNIT	RCVR UNIT ⁴		XMTR ARM	HEAD-BAND	CORD	CORD LENGTH (FEET) ¹	PLUG	SWITCH	CORD FASTENER
		OLD	NEW							
52A ³	N1	HC3	LB2	55A	15F	L4BM ³	5 (nonspring)	289B ³		P-478356
52B ³	N1	HC3	LB2	55A	15F	L4AH ³	10 (spring)	289B ³	KS-8010	P-478356
52C ³	N1	HC4	LB3	55A	15F	L4BM ³	7 (nonspring)	289B ³		P-478356
52D ³	N1	HC3	LB2	55A	15F	L4AK ³	15 (spring)	289B ³		P-478356
52E	N1	P-48V124	P-48V545	55A	15C	L2Y ²	7 (nonspring)			
52H ³	N1	HC3	LB2	55A	15F	L4BL ³	5 (nonspring)	464A		P-478356
52J ³	N1	HC4	LB2	55A	15F	L4BL ³	7 (nonspring)	464A		P-478356
52K ³	AD1	HC7	LB3	55B	15F	L4BP ³	18 (semispring)	422A		P-17E761
52L	N1	HC6	LB2	55A	15F	L4BY	10 (spring)	464A	240A	P-478356
52M	N1	HC7	LB3	55A	15F	L4CC	7 (nonspring)	464A		P-478356
52N	N1	HC6	LB2	55A	15F	L4CA	15 (spring)	464A		P-478356
52S	N1	HC6	LB2	55A	15F	L4CC	5 (nonspring)	464A		P-478356
52T	AD1	HC7	LB3	55B	15F	L4CD	18 (semispring)	422A		P-17E761
52AH	AD1	HC7	LB3	55B	15F	L4CE	18 (semispring)	425A ³		P-17E761
52FR ³	N1	HC4	LB2	55A	15C	L4BK ³	7 (spring)	289B ³	225A	
52GR ³	N1	HC4	LB2	55A	15C	L6G ³	7 (spring)	338A ³	225A	
52PR	N1	HC7	LB3	55A	15C	L4CB	7 (spring)	464A	240A	
52RR	N1	HC7	LB3	55A	15C	L6H	7 (spring)	425A ³	240A	

Notes:

1. When ordering cord, specify the length as shown in the table.
2. Cord includes two P-16E169 test clips and a 516A capacitor.
3. Manufacture Discontinued.
4. New 52-type head telephone sets are equipped with LB-type receiver units. Older type head telephone sets using the HC-type receiver units may be converted to accept the LB-type by installing a D-180417 kit of parts.

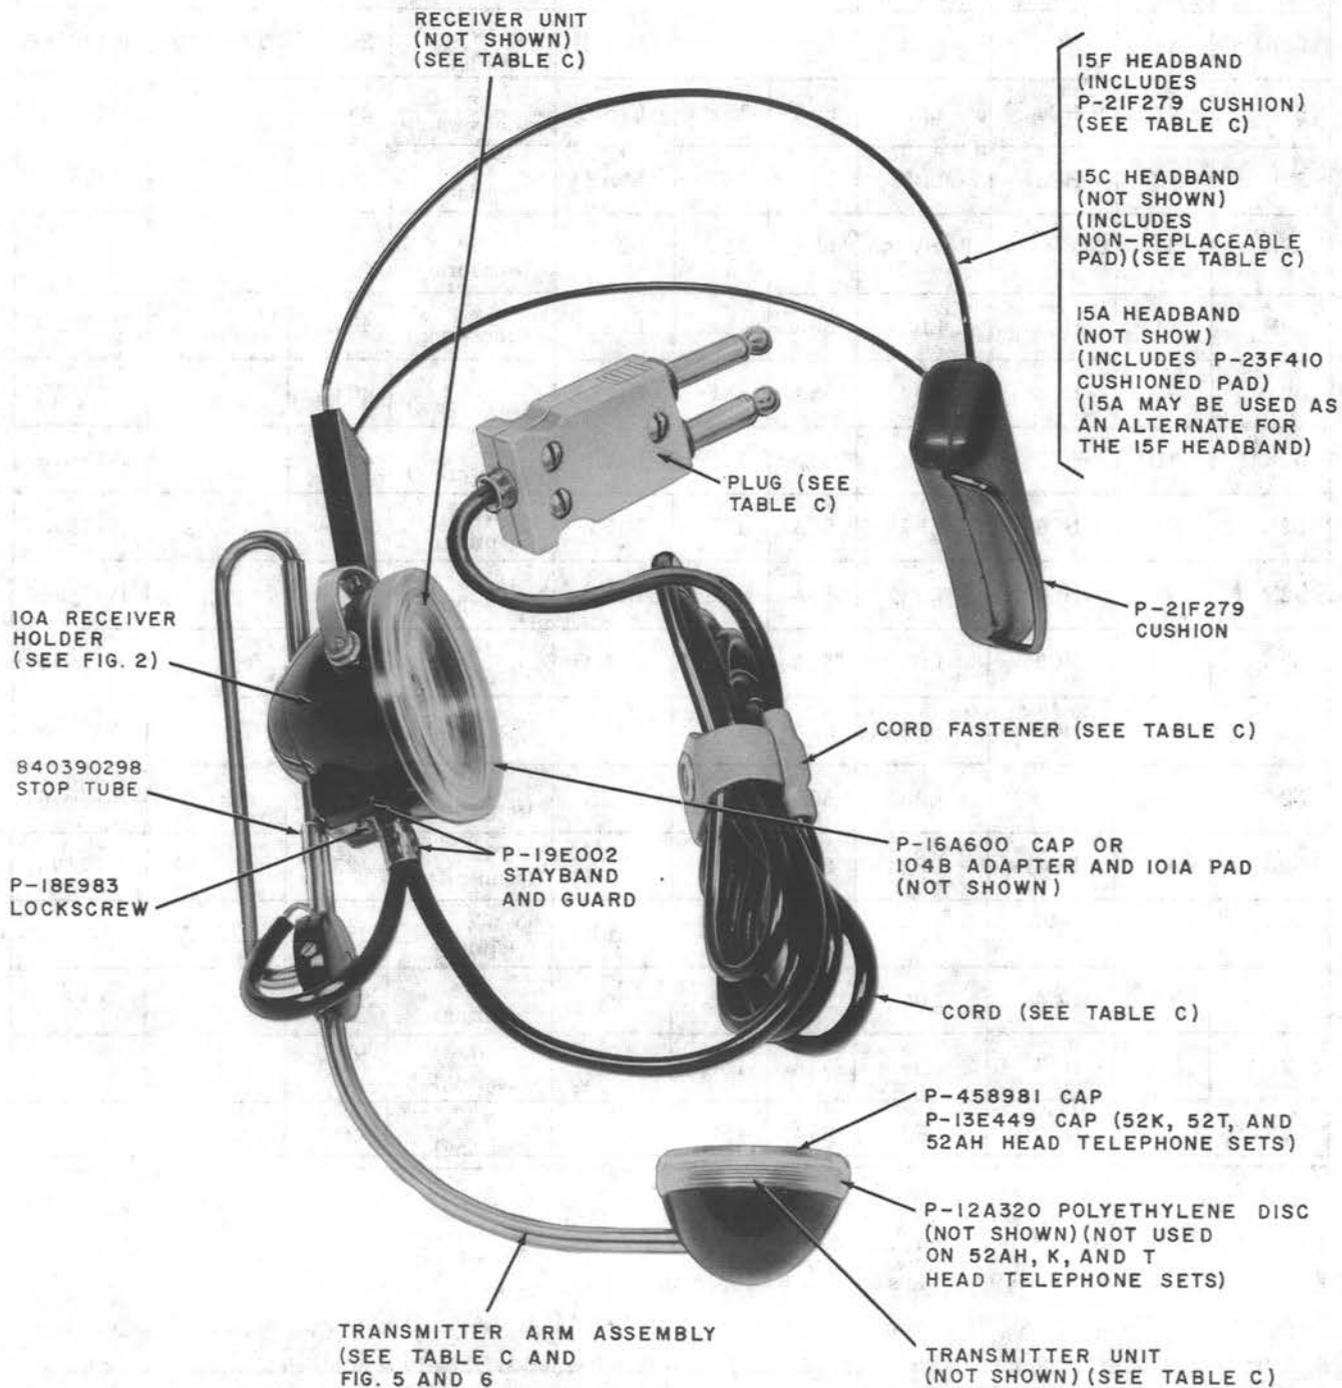


Fig. 1—52-Type Head Telephone Sets (52S Head Telephone Set Equipped With Stopbar Illustrated)