



NONCODED TOOLS  
HOLDERS, HOLSTERS, HONES, HOOKS, HOSES  
DESCRIPTION

HOLDER, APCO-MOSSBERG CO., NO. 825



For use with 1/4-inch square drive supplied with Apco-Mossberg Co. No. B50 torque screw-driver.


HOLDER, KS-20545 L1

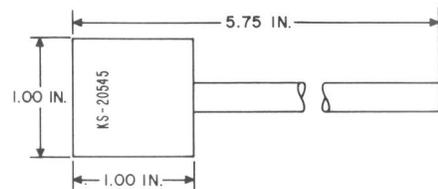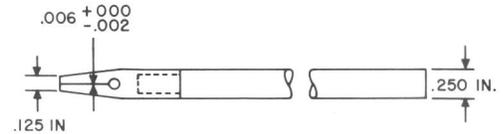

An insulated tool consisting of a rectangular block which is beveled and slotted at one end, and assembled to a rod shape handle at the opposite end. The slot is arranged to accommodate a sheet of KS-7187 cleaning paper.

For use in cleaning wire spring relay and cross-bar switch contacts.


HOLDER, KS-16913 L1

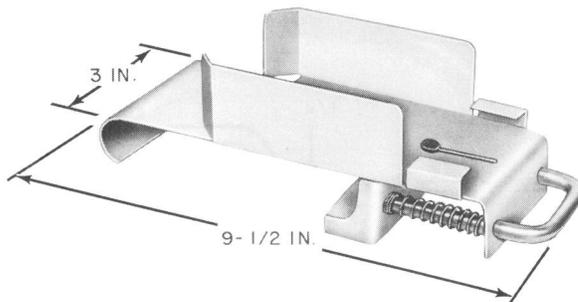

Replaces the KS-13506 Holder.


Provided with a clamp for mounting on a central office ladder. For holding KS-13501 L2 and similar applicators when not in actual use.

HOLDER, BRUSH, R-2598

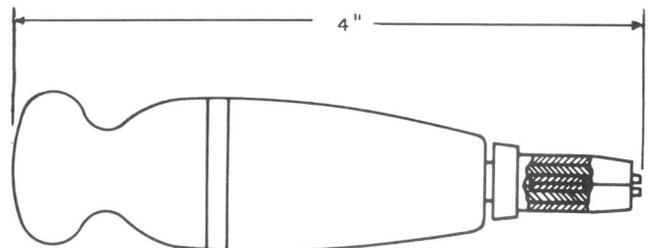

For use as a handle for the KS-13604 brush.

**HOLSTER, KS-16921 L1**

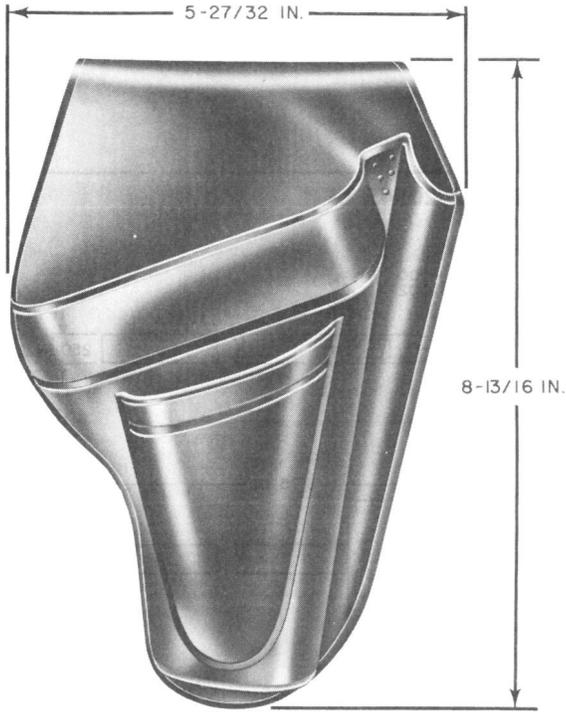

A flap is provided on the rear of the holster to allow the holster to be attached to a belt.


For use in storing or carrying the KS-16363 Wire Wrapping Tool, the KS-16492 L2 Wire Unwrapping Tool, and the R-3088 Wire Stripper.

**HONE, INSTRUMENT, THE CARBORUNDUM CO.  
NO. 100 (OR EQUIVALENT)**

Size: 4 x 1 x 3/8"

For use in sharpening the dental scrapper when used on banks associated with 197- and 198-type switches.

**HOOK, SHAVE, B**

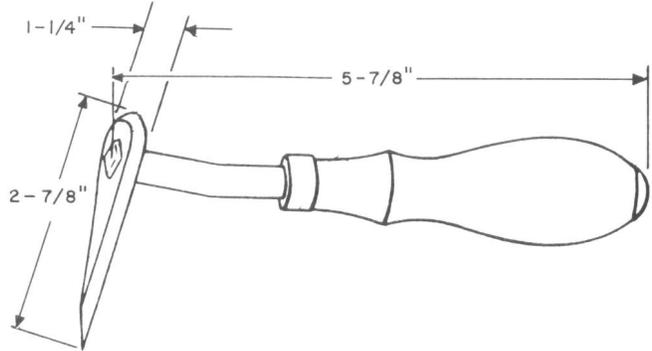


Replaces Shave Hook AT-6892

Order also, B shave hook guard, if required.


For use in cleaning and preparing lead cable sheath and sleeves for soldering and wiping joints.

(Spec. AT-7151)

**HOOK, SPRING, PULL, TP75765**

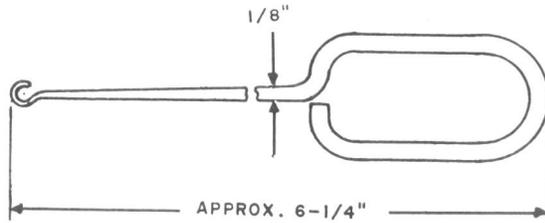

For use on No. 1A regenerator units.

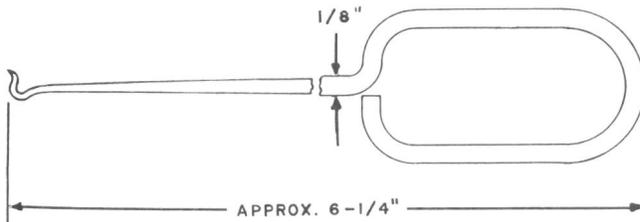**HOOK, SPRING PUSH, TP75503**


For use in attaching selector elevator apparatus trip rod rotating lever retractile springs and on No. 1A regenerator units.

**HOOK, EXTRACTOR, R-1919**

"Mfr Disc"

**HOSES, PRESSURE, B, C, D, AND E**

(In ordering, specify B, C, D, or E, and length of hose desired.)

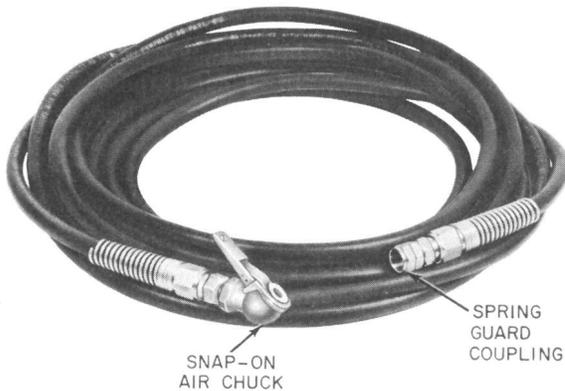

B HOSE ILLUSTRATED

The B and C pressure hoses, available in any desired length, are equipped at one end with a spring guard coupling. The other end of the B hose is equipped with a spring guard coupling and a snap-on air chuck. The other end of the C hose is equipped with a screw-on angle connector.

The D pressure hose, available in 6, 12-1/2, and 25 foot lengths, is equipped at both ends with a spring guard coupling.

The E pressure hose, available in 10 and 30 foot lengths, is equipped at both ends with a spring guard coupling.

The fittings for the B, C, D, and E pressure hoses may be ordered as replacement parts. When replacing an angle connector in the field, order a hose clamp for securing the connector and discard the ferrule originally provided.

Replacement parts for B, C, D, and E pressure hoses, may be ordered as follows:

Chuck, Air

Clamp, Hose (AT-7320X)

Connector, Angle, Hose, 3/16" (AT-7656X)

Coupling, Hose

Replaces the A, Schrader's Son No. 6739 Air Chuck.

For use in making connections to acetylene and similar type regulators, torches, pressure testing valves, and heaters.

(Spec. AT-7676)