

NONCODED SOCKETS


DESCRIPTION

1. GENERAL

1.01 This section lists and illustrates the standard noncoded sockets used for the maintenance and operation of equipment in central offices.


2. SOCKETS

KS-8586 L9




	No. of Contacts	Used With Plug
KS-8586 L9	2	KS-8585 L12 & L15

KS-8586 List Nos. 4, 6, 7, 13, 26, 28, 31, 39, 50, 52, and 53



	No. of Contacts	Used With Plug
KS-8586 L4	6	KS-8585 List Nos. 6, 16, 17, 20 and 50
KS-8586 L6	4	KS-8585 List Nos. 8, 9, 14, 24 and 51
KS-8586 L7	8	KS-8585 List Nos. 10, 13, 44 and 49
KS-8586 L13	10	KS-8585 List Nos. 18 and 19
KS-8586 L26	6	KS-8585 L16
KS-8586 L28	6	KS-8585 List Nos. 6 and 50
KS-8586 L31	10	KS-8585 List Nos. 18 and 19
KS-8586 L39	10	KS-8585 L18
KS-8586 L50	10	KS-8585 L16
KS-8586 L52	4	KS-8585 L48
KS-8586 L53	8	Used in special application. Does not mate with any plug.


KS-8586 List Nos. 3, 8, 15, 24, 25, 27, 29, 38, and 51.



SECTION 032-303-101


	No. of Contacts	Used With Plug
KS-8586 L3	4	KS-8585 L3 and L4
KS-8586 L8	18	KS-8585 L11
KS-8586 L15	15	KS-8585 L21 and L22
KS-8586 L24	15	KS-8585 L25
KS-8586 L25	12	KS-8585 L27
KS-8586 L27	15	KS-8585 L29
KS-8586 L29	15	KS-8585 L21 and L22
KS-8586 L38	18	KS-8585 L35
KS-8586 L51	21	KS-8585 L47

KS-8586 L16 and L41

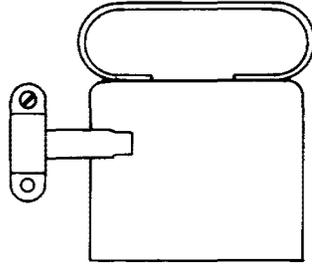


	No. of Contacts	Used With Plug
KS-8586 L16	33	KS-8585 L23
KS-8586 L41	18	KS-8585 L41

KS-8586 L42




KS-8586 L42 socket has 18 contacts. Used with KS-8585 L39 and L41 plugs.

KS-8586 L1



KS-8586 L1 socket has 24 contacts. Used with KS-8585 List Nos. 1, 2, 5, and 7 plugs.


KS-8586 List Nos. 14, 30, 45, 49, 56, and 58

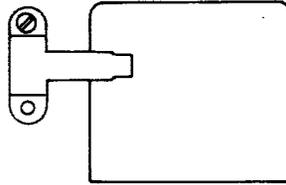

	No. of Contacts	Used With Plug
KS-8586 L14	15	KS-8585 L21 and L22
KS-8586 L30	15	KS-8585 L21 and L22
KS-8586 L45	8	KS-8585 L42
KS-8586 L49	18	KS-8585 L11
KS-8586 L56	6	KS-8585 L16, 17, and L20
KS-8586 L58	4	KS-8585 L8, L9, and L24


L56 socket intended for use in key telephone Power Reserve Package
 L57 socket intended for use on the 584D panel.

KS-8586 L5, L6, and L22

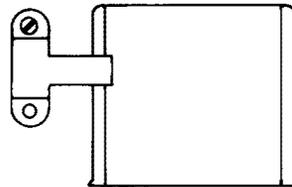


	No. of Contacts	Used With Plug
KS-8586 L5	4	KS-8585 L8, L9, and L51
KS-8586 L6	4	KS-8585 List Nos. 8, 9, 14, 24, and 51
KS-8586 L22	4	KS-8585 L9 and L51

KS-8586 L55

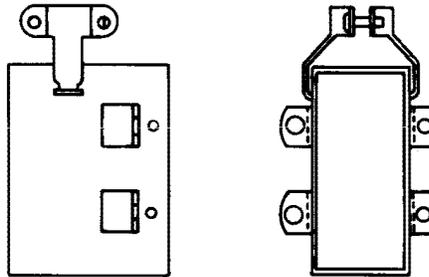

Used in 412A key telephone unit
 KS-8586 L55 socket has 21 contacts. Used with KS-8585 L53 plug.


KS-8586 L42 and L43



SECTION 032-303-101


	No. of Contacts	Used With Plug
KS-8586 L42	18	KS-8585 L39 and L41
KS-8586 L43	18	KS-8585 L41

KS-14453 L1 and L2

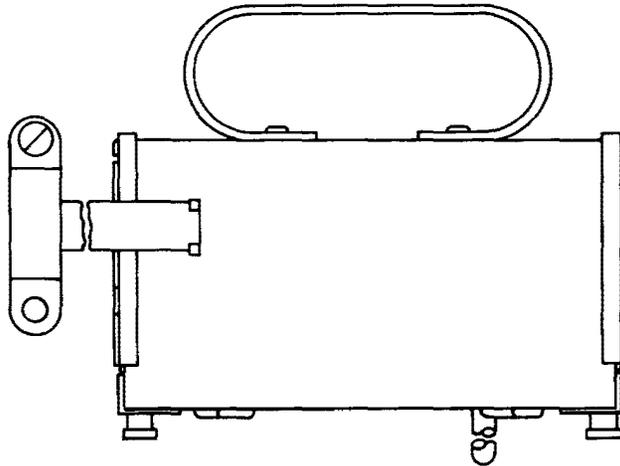


The KS-14453 L1 and L2 sockets are multicontact polarized female sockets equipped with 50 gold-plated contacts. Intended for use in the 81D1 teletypewriter switching system. They mate with KS-14452 L1 and L2 plugs.

KS-14453 L3

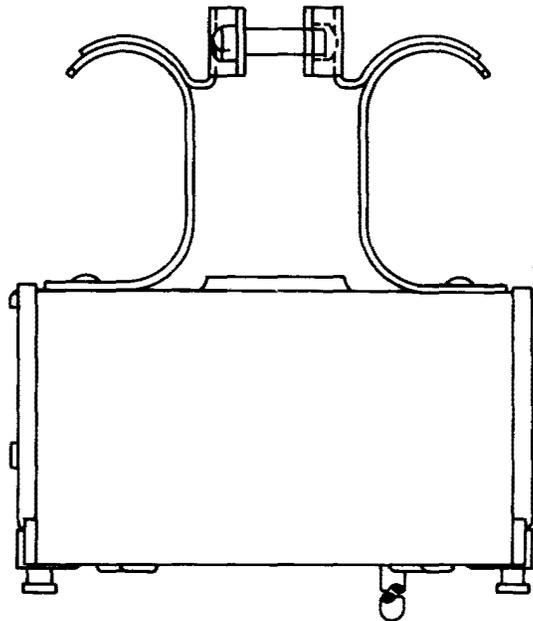

The KS-14453 L3 socket is a multicontact polarized female socket equipped with 50 gold-plated contacts. Intended for use in the 81D1 teletypewriter switching system. This socket mates with the KS-14452 L3 plug.


KS-19235 L1

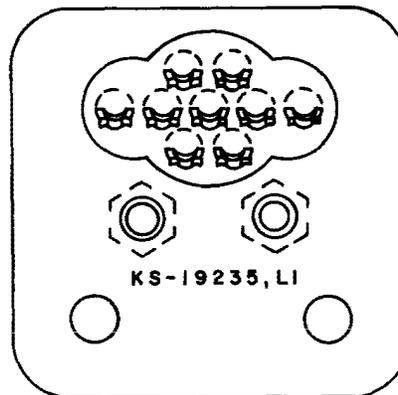

A 9-pin type relay socket equipped with gold-plated phosphor bronze contacts. The wiring ends are arranged for solderless wrapped connections. Primarily intended for use in the No. 5 Crossbar Switching System as a receptacle for the 316 - type relays.



SECTION 032-303-101

KS-19543 L1

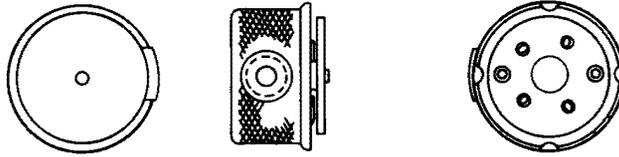


This socket is intended for use for mounting a 459 type electron tube in a TM-1 radio system.

KS-19826 L1




This socket is intended to mount one 218-type selector for use in 806H, 807D, and 808H ringing tone power plants in J86815, J86829, and J86834 respectively.

KS-20241 L1

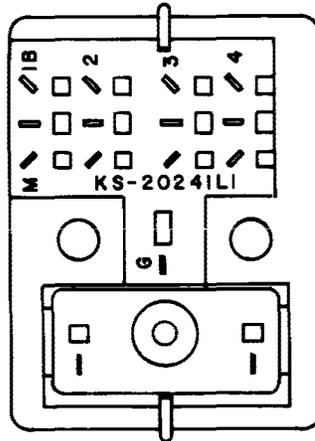

An MA type relay socket intended for use in SF submarine cable system. A bail is provided for relay retention.

KS-20242 L1

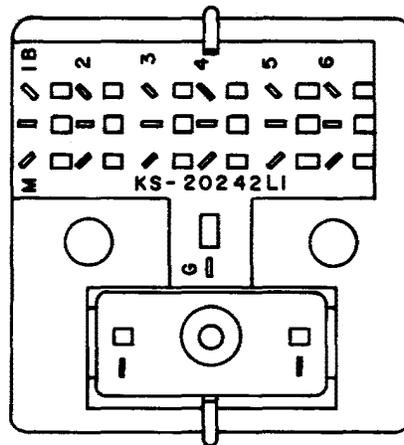

An MB type relay socket intended for use in SF submarine cable system. A bail is provided for relay retention.
