


NONCODED TOOLS

SCREWDRIVERS I

DESCRIPTION



AECo H-21766

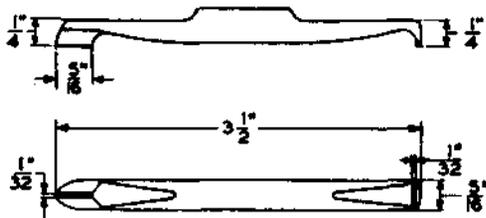

Offset double-end screwdriver

For use on 197- and 198-type switches and step-by-step type relays.

TORQUE, APCO-MOSSBERG CO.
NO. B50 RIGHT AND NO. B50 LEFT
(NO. B50 RIGHT ILLUSTRATED)

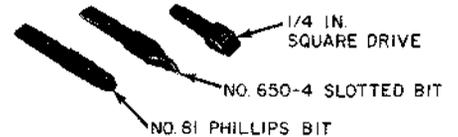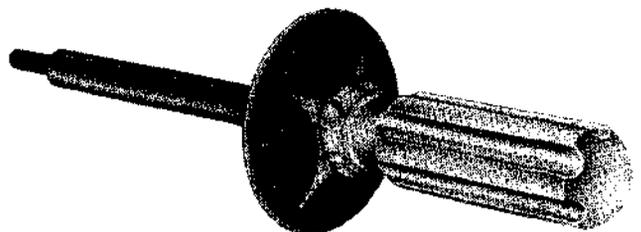


A torque screwdriver having a capacity of 50 inch-pounds.

For use in tightening recording head mounting screws and capstan mounting plate screws on the KS-19125 L3, KS-19647, and KS-19829 recorders.

TORQUE,
APCO-MOSSBERG CO., NO. B12

Equipped with No. 650-4 bit only.

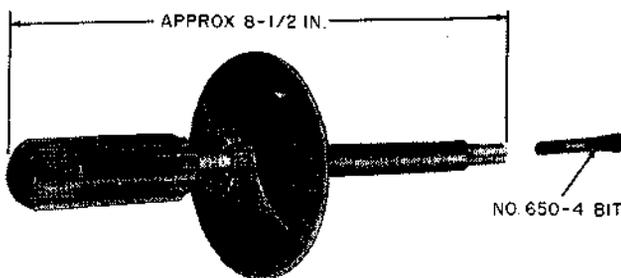


A torque screwdriver having a capacity of 12 inch-pounds.

For use in tightening mounting screws of wire spring type relays equipped with P-19A890 flexible mountings.

B

In ordering, specify size desired.

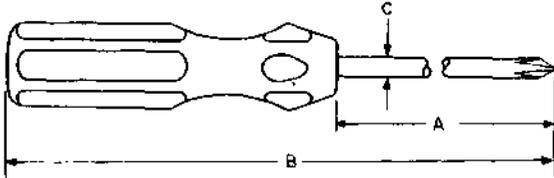

SIZE	DIMENSIONS			INTENDED FOR SCREW NUMBER
	A	B	C	
1	3"	7"	3/16"	4 and smaller
2	4"	8"	1/4"	5 to 9
3	6"	11"	5/16"	10 to 16

The B Screwdriver may be furnished with a 4- or 6-fluted plastic handle.

Replaces the Phillips-type Screwdriver.

For general use when Phillips screws or bolts are employed.

(Spec. AT-7739)

Screwdrivers may be furnished with a 4- or 6-fluted plastic handle.

The C Screwdriver replaces the Cabinet Screwdriver and the 6-inch AECo H-24664 Cabinet Screwdriver.

The D Screwdriver replaces the H Cabinet Screwdriver.

For general use.

(Spec. AT-7825)

CABINET, AECo H-24664

Replaced by C Screwdriver.

CABINET

Replaced by C Screwdriver.

CORD-REPAIR, KS-2348

For ordering information—

See Tool, Cord-Repair, KS-2348

D-158524

Mfg. Disc."


Replaced by the 670A tool.

DOUBLE GRIP (Spec. AT-6860)

Replaced by the KS-19053 L1 Screwdriver.

C AND D


In ordering, specify code and size desired.

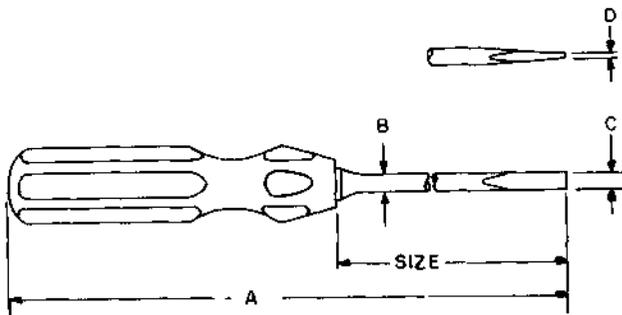

CODE	SIZE	DIMENSIONS				INTENDED FOR SCREW NO.
		A	B	C	D	
C	3"	6-7/8"	3/16"	3/16"	0.025"	4 to 6
C	6"	9-7/8"	3/16"	3/16"	0.028"	5 to 8
D	3"	7"	1/4"	1/4"	0.029"	5 to 10

E

In ordering, specify code and size desired.

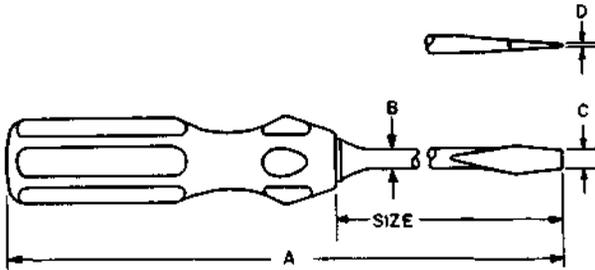

CODE	SIZE	DIMENSIONS				INTENDED FOR SCREW NO.
		A	B	C	D	
E	4"	8-5/16"	1/4"	1/4"	0.031"	6 to 12
E	5"	10-1/2"	3/8"	7/16"	0.043"	14 to 18

The screwdrivers may be furnished with a 4- or 6-fluted plastic handle.

Replaces the Regular Screwdriver.

For general use.


(Spec. AT-7825)

H CABINET

Replaced by the D Screwdriver.

JEWELERS

In order specify the number of the screwdriver and, when given, the name of the maker.

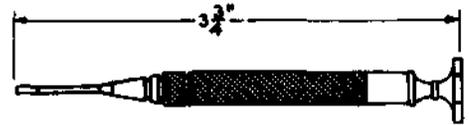


NUMBER	BLADE WIDTH	BLADE LENGTH
R-1005	0.080"	3/4"
L.S. Starrett Co. No. 555E	0.100"	3/4"

The R-1005 screwdriver replaces the No. 3 William Dixon Watchmakers Screwdriver, and is for general use.


L.S. Starrett Co. No. 555E Screwdriver is for use on KS-12055 L4 recorder-reproducers.

KS-2631

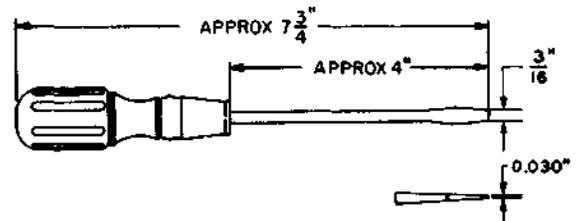

For general use.


KS-6854

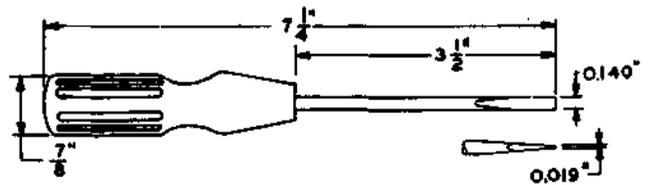

Replaces the 35 tool.

For general use.

KS-14336

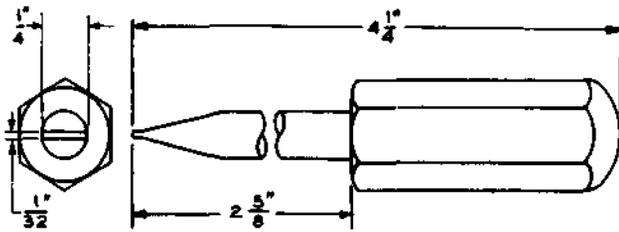

For use on the KS-18834 perforator.


OFFSET, R-72833

Replaced by the 563A and 564A tools.

PHILLIPS-TYPE

Replaced by the B Screwdriver.


KS-19053 L1

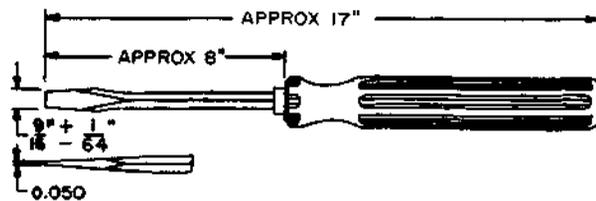

Replaces the T Handle Screwdriver R-58442 and the AT-6860 Double Grip Screwdriver.


For use primarily on clutches in panel central offices.

SCREWDRIVER, R-1324

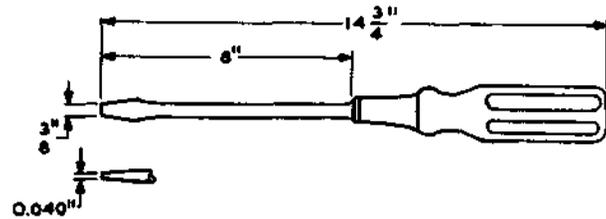



For use on the 659-type tools.

R-1626

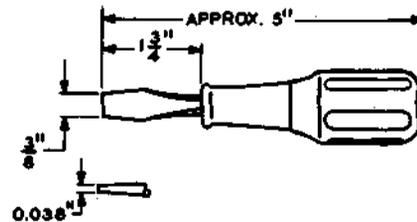

For use on operator and supervisor bentwood type chairs.

KS-20193 L1

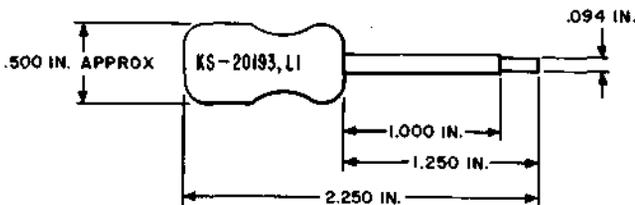

For use in adjusting the regulating repeaters of L4 Coaxial System.