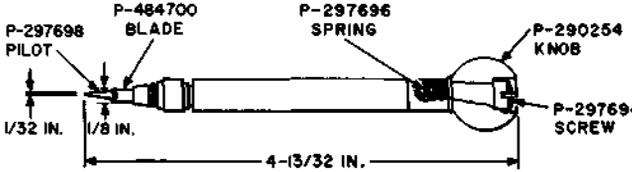
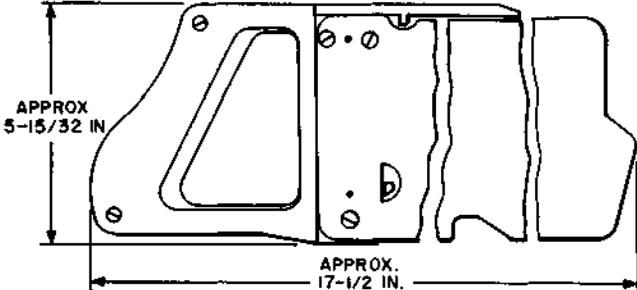
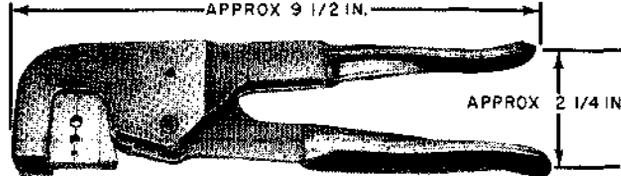
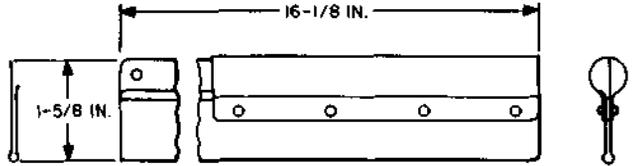


NONCODED TOOLS
TAPS AND MISCELLANEOUS TOOLS
DESCRIPTION


<p>TAP, 2-56, COMMERCIAL For use on 101-type relays.</p>	<p>TOOL, CLEARING, BANK, AECo H-16590, DETAIL 1 Replaced by the 402E tool.</p>
<p>TAP, 8-32, COMMERCIAL For use in repairing vertical drive shafts.</p>	<p>TOOL, CORD REPAIR, KS-2348</p>
<p>TOOL, BREAKOFF, TANG, HELI-COIL CORP. NO. 1196-5 This tool is used for breaking off the 1191-5CN insert tangs after insertion. It consists of a steel rod and a holder in which the rod slides. The use of this tool is covered in Section 034-335-801.</p>	 <p>Replaces the 109 tool.</p> <p>For use on keys, for placing shell and binding screws on 109-, 110-, 309-, and 310-type plugs, and for repairing tinsel switchboard cords.</p>
<p>TOOL, BUSYING, BANK, AECo H-23366 Replaced by the 370A and 370B tools.</p>	<p>TOOL, CRIMPING, HAND, KS-15710 In ordering, specify list number desired.</p>
<p>TOOL, CARD HANDLING, KS-14545</p>  <p>For use in bulk handling of 200 blanks and coded cards when servicing 1-type translators.</p>	 <p>FIG. 2</p>  <p>FIG. 1</p>
<p>TOOL, CARD INSERTING, KS-14553</p>  <p>For use in inserting single coded cards in 1-type transistors.</p>	

Long handle crimping tool

KS-15710	Fig.	Dimensions Across Flats	Die Code	For Outer Sleeve KS-15712
L1 (WT232)	1	0.178 ± 0.003	K	L1
		0.197 ± 0.003	L	L2
		0.231 ± 0.003	P	L3
L2 (WT234)	2	0.290 ± 0.003	T	L4
		0.314 ± 0.003	V	L5
L3 (WT236)	2	0.314 ± 0.003	V	L5
		0.384 ± 0.003	X	L6
L4	—	0.151 ± 0.003	—	L14
		0.178 ± 0.003	—	L15
		0.213 ± 0.003	—	L16
L5	—	0.128 ± 0.003	—	L14
		0.151 ± 0.003	—	L13
L6	—	0.218 ± 0.003	—	L30
		0.255 ± 0.003	—	L28


For use with KS-15711 and KS-15712 shield connectors when terminating the shields of wire or cable.

TOOL, DEBURRING, KS-16088

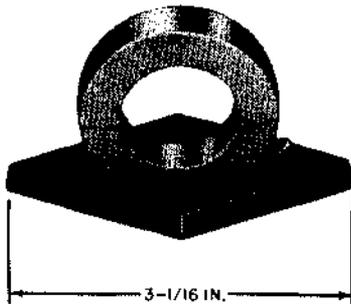


For use in deburring coded cards for 1-type translators and for use with 81A test set in gauging the height of burrs on cards.

TOOL, PRESSURE, D-156695

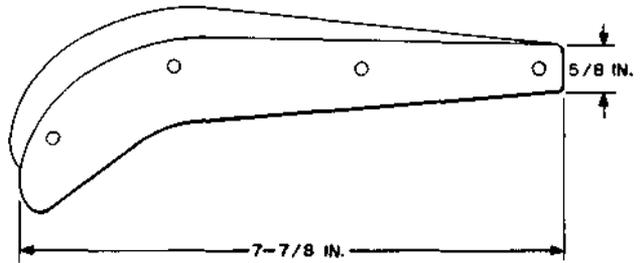


For use in cleaning plunger-type line switch springs.

TOOL, REPAIR, VALVE

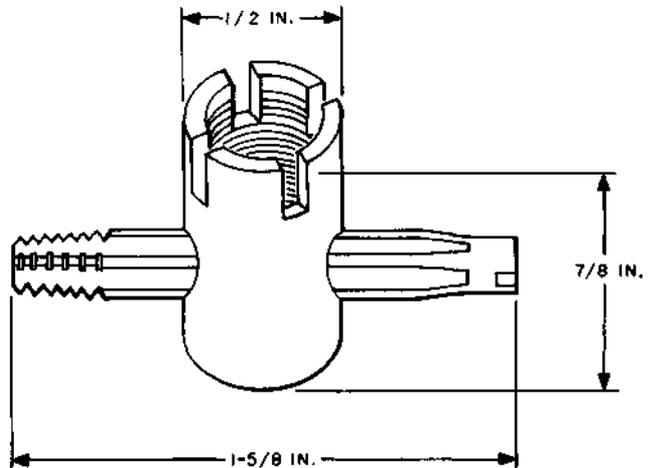


For pressure testing purposes, (Spec. AT-7471 X)

TOOL, RETAINING, DISC, TP-99896

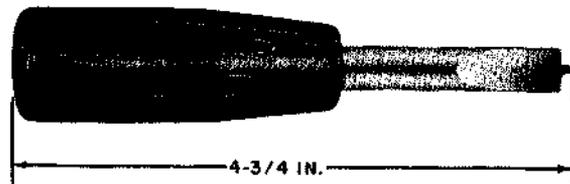


For use on 1A and 1B regenerator units.

TOOL, SETTING, GEAR CASE, R-1026

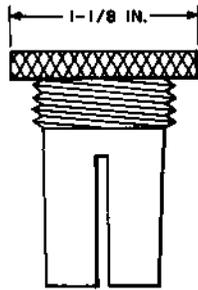

For use on friction roll drives.


TOOL, TEST, D-96346

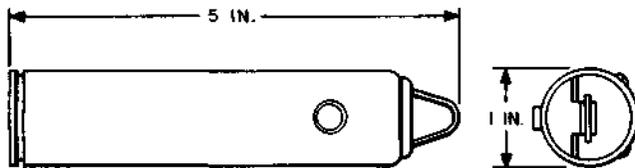

Resistance 43.2 and 132.6 ohms.


For use in testing the "B" relay of secondary line switches associated with allotter equipment.

TOOL, TESTING TAPE, D-151155

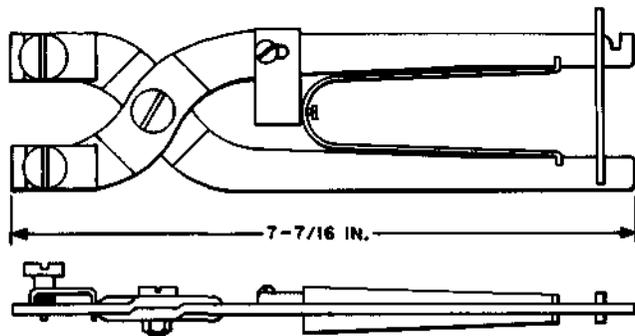



For use on tape announcing machines.

TOOL, THREADING, TAPE, D-151159

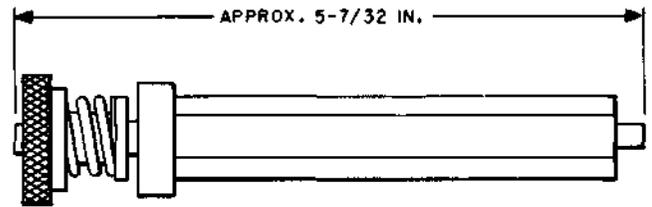

For use on tape announcing machines.

TOOL, TRIMMING, KS-20704 L1

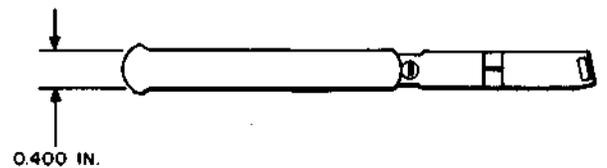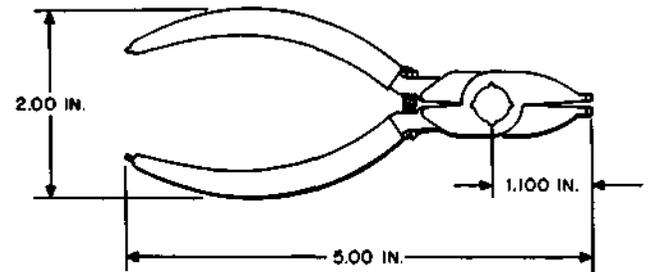

A hand operated punch with insulated handles. It is intended for use in central offices to remove damaged Mylar from step by step banks.