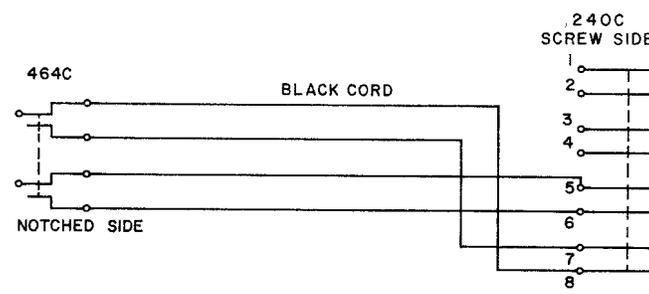
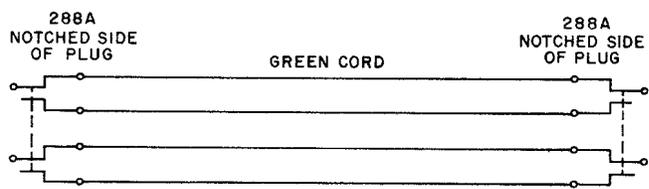
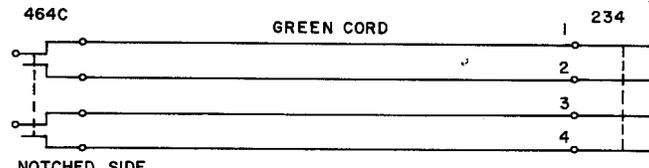
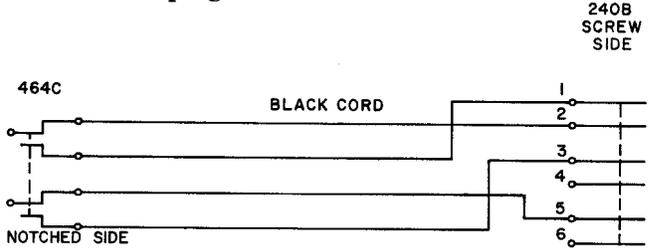
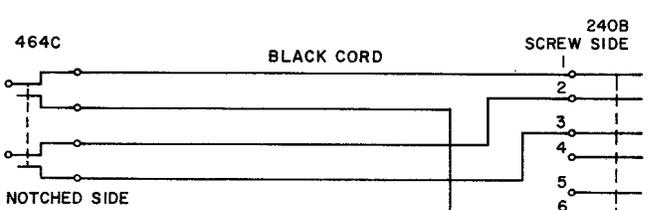



PATCHING CORD ASSEMBLIES
4-CONDUCTOR CORDS
4P1A TO 4P24A
DESCRIPTION

<p>4P1A "Mfr Disc." (Replaced by the 4P18A cord)</p>	<p>4P5A 1 P4BB cord, 12 feet long, equipped with: 1 464C plug 1 240C plug</p> 
<p>4P2A "Mfr Disc." (Replaced by the 5P3A cord)</p>	
<p>4P3A 1 P4H cord, 6 feet long, equipped with: 2 288A plugs</p> 	<p>4P6A 1 P4BC cord, 19 feet 6 inches long, equipped with: 1 464C plug 1 234 plug</p> 
<p>4P4A 1 P4BB cord, 12 feet long, equipped with: 1 464C plug 1 240B plug</p> 	
<p>4P4B 1 P4BB cord, 12 feet long, equipped with: 1 464C plug 1 240B plug</p> 	

4P7A

1 P4BC cord, 19 feet 6 inches long, equipped with:

- 1 464C plug
- 1 235 plug

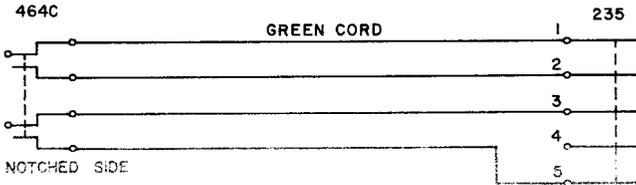


4P8A

1 P4BD cord, 4 feet long, equipped with:
2 464C plugs

4P8B


1 P4BD cord, 6 feet long, equipped with:
2 464C plugs

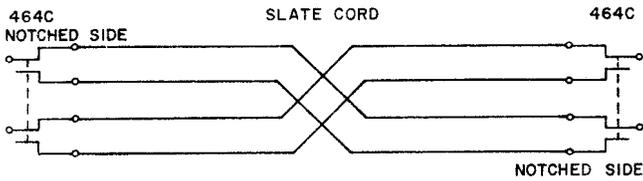

4P9A

1 P4BE cord, 19 feet 6 inches long, equipped with:

- 1 464C plug
- 1 234 plug

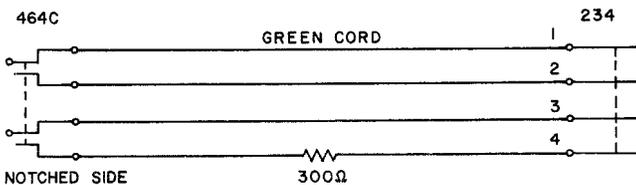

4P10A

"Mfr Disc."
(Replaced by the 4P19A cord)

4P11A

"Mfr Disc."
(Replaced by the 4P14A cord)

4P12A

"Mfr Disc."
(Replaced by the 4P16A cord)

4P13A

"Mfr Disc."
(Replaced by the 4P15A cord)


4P14A

(Replaces the 4P11A cord)

1 P4Y cord, 7 feet long, equipped with:

- 1 309 plug
- 1 310 plug
- 1 351A plug
- Res 0.25 Ω ft

P-15A417 cord holders furnished when specified.

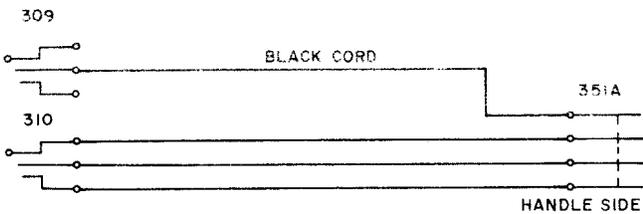


4P15A

(Replaces the 4P13A cord)

1 P4BH cord, 7 feet long, equipped with:

- 1 464B plug
- 1 351B plug

P-15A417 cord holders furnished when specified.

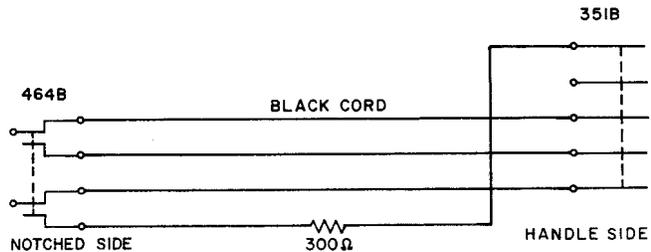


4P16A (Replaces the 4F12A cord)

1 P4BH cord, 7 feet long, equipped with:

1 464B plug

1 351A plug

P-15A417 cord holders furnished when specified.

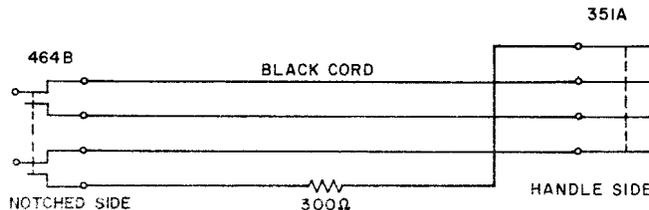

4P18C (Replaces the 4P1C cord)


1 P4BG slate cord, 6 feet long, equipped with:

2 464A plugs

4P18D (Replaces the 4P1D cord)

1 P4BG black cord, 6 feet long, equipped with:

2 464A plugs

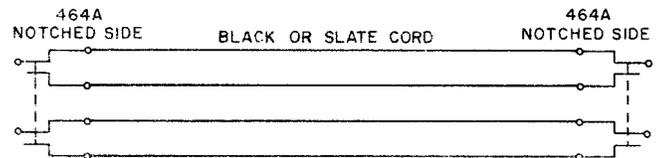

4P17A

1 P4S cord, 4 feet long, equipped with:

2 315A plugs

4P17B

1 P4S cord, 6 feet long, equipped with:

2 315A plugs

4P17C


1 P4S cord, 10 feet long, equipped with:

2 315A plugs

4P17D

1 P4S cord, 6 feet long, equipped with:


2 315B plugs

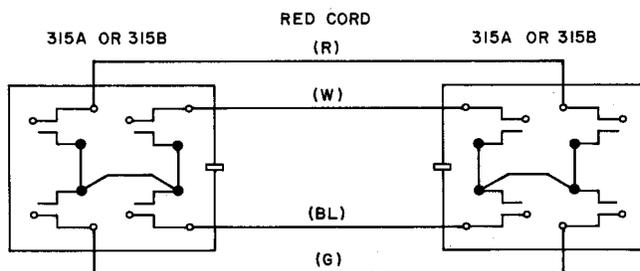

4P19A (Replaces the 4P10A cord)

1 P4AR cord, 8 feet long, equipped with:


2 428A plugs

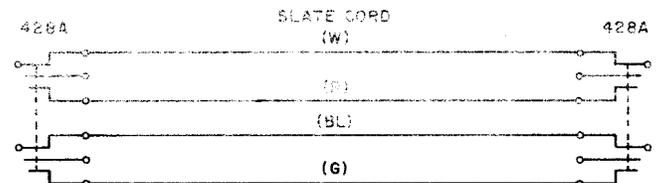

4P19B

1 P4AR cord, 5 feet long, equipped with:

2 428A plugs

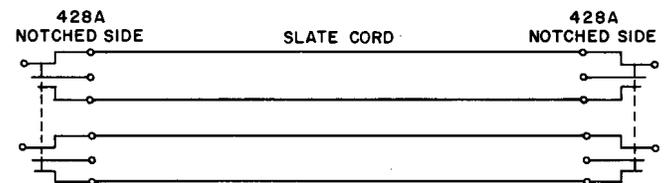

The individual code of the cord includes eight 133 cord tips.

4P18A (Replaces the 4P1A cord)

1 P4BG slate cord, 2 feet long, equipped with:

2 464A plugs


4P18B (Replaces the 4P1B cord)

1 P4BG slate cord, 4 feet long, equipped with:

2 464A plugs


4P20A

1 P4BJ cord, 7 feet long, equipped with:
 1 464B plug
 1 351E plug
 P-15A417 cord holders furnished when specified.

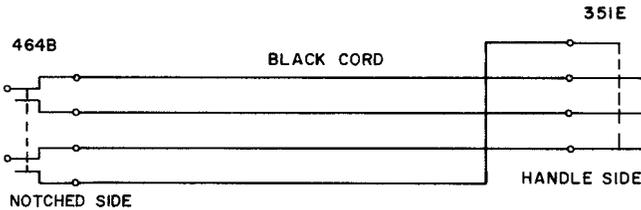


4P21A

1 P4AD cord, 6 feet long, equipped with:
 1 241B plug
 1 354A plug
 1 354B plug
 Res 0.16 Ω/ft

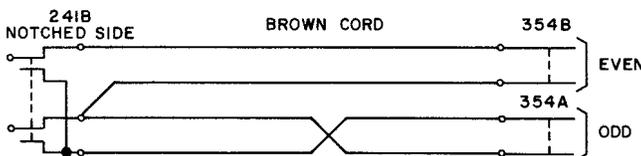


4P22A

1 P4AE cord, 7 feet long, equipped with:
 1 288A plug
 1 360D plug

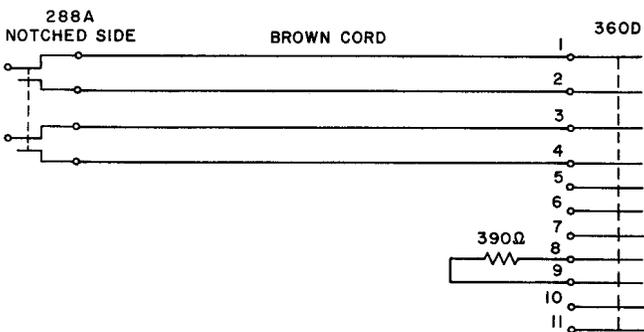

4P23A


1 P4BF cord, 6 feet long, equipped with:
 1 464C plug
 2 301A plugs
 Res 0.16 Ω/ft

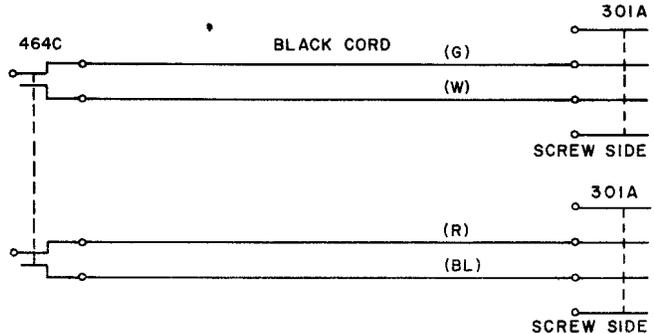

The cord initially was intended for use at distributing frames for patching Varley test trunks to conductors terminated on 444-type jacks.

4P24A

1 P4BC cord, 19 feet 6 inches long, equipped with:
 1 464C plug
 1 415A plug
 Res 0.17 Ω/ft

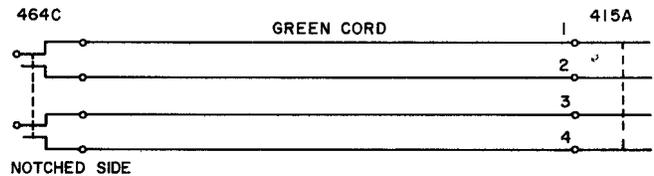

The cord initially was intended for use at distributing frames to patch such circuits as service observing circuits to circuits terminated on terminal strips with the cable side arranged for solderless wrapped connections.