


PATCHING CORD ASSEMBLIES  
CORDS HAVING MORE THAN SIX CONDUCTORS

D25D-87 TO D75B-87

DESCRIPTION

**CORD, D25D-87**

5 feet 6 inches or 9 feet long  
Unless otherwise specified, the 5 foot 6 inch length shall be furnished.

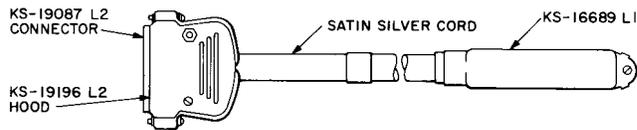


The code of the cord includes one KS-19087 L2 connector, one KS-19196 L2 hood, and one KS-16689 L1 plug. The cord was initially intended for use with the 103A, 201A, and 201B data sets.

**CORD, D35C-87**

5 feet 6 inches or 9 feet long

Unless otherwise specified, the 5 foot 6 inch length shall be furnished.

The code of the cord includes one KS-16690 L1 connector, one KS-19087 L2 connector, one KS-19196 L2 hood, 10 P-17A227 cord tips, and one P-376829 band and hook assembly. The cord was initially intended for use with the 103A data set.

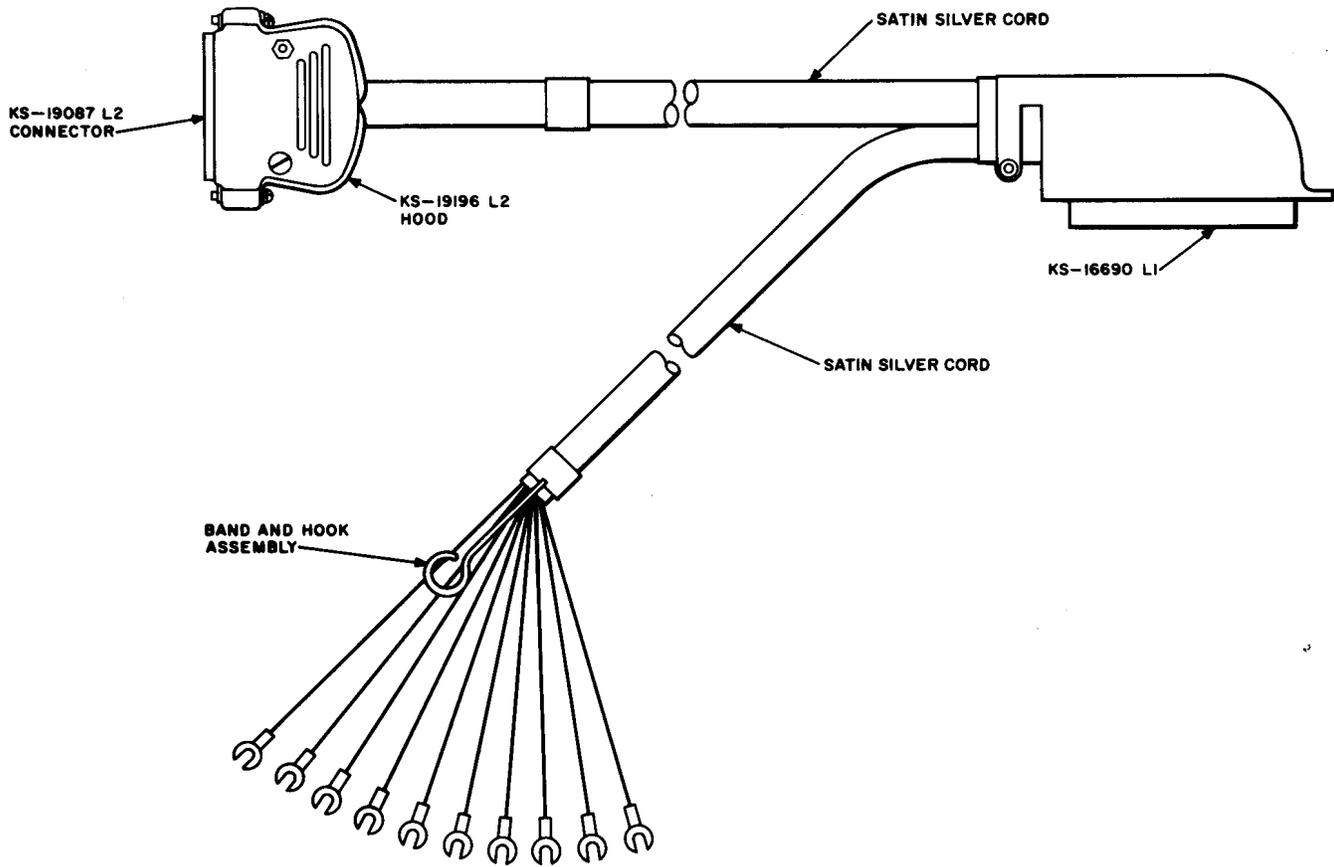


**CORD, D50W-87**

5 ft 6 inches  
9 ft, 13 ft, and 25 ft long.  
(Unless otherwise specified, the 5 ft. 6 inch cord shall be furnished.)

The set end is equipped with a flat extension stayband. Six plugs are equipped with conductor

groupings to provide interchangeable connections to each of the button positions of the 635A2 key. The remaining conductors are terminated with spade-type cord tips. Thirteen of these spade tips are dead dressed. The plug end is equipped with a KS-16689 L1 plug. The cord initially was intended for use in the Automatic Voice Network (Autovon).

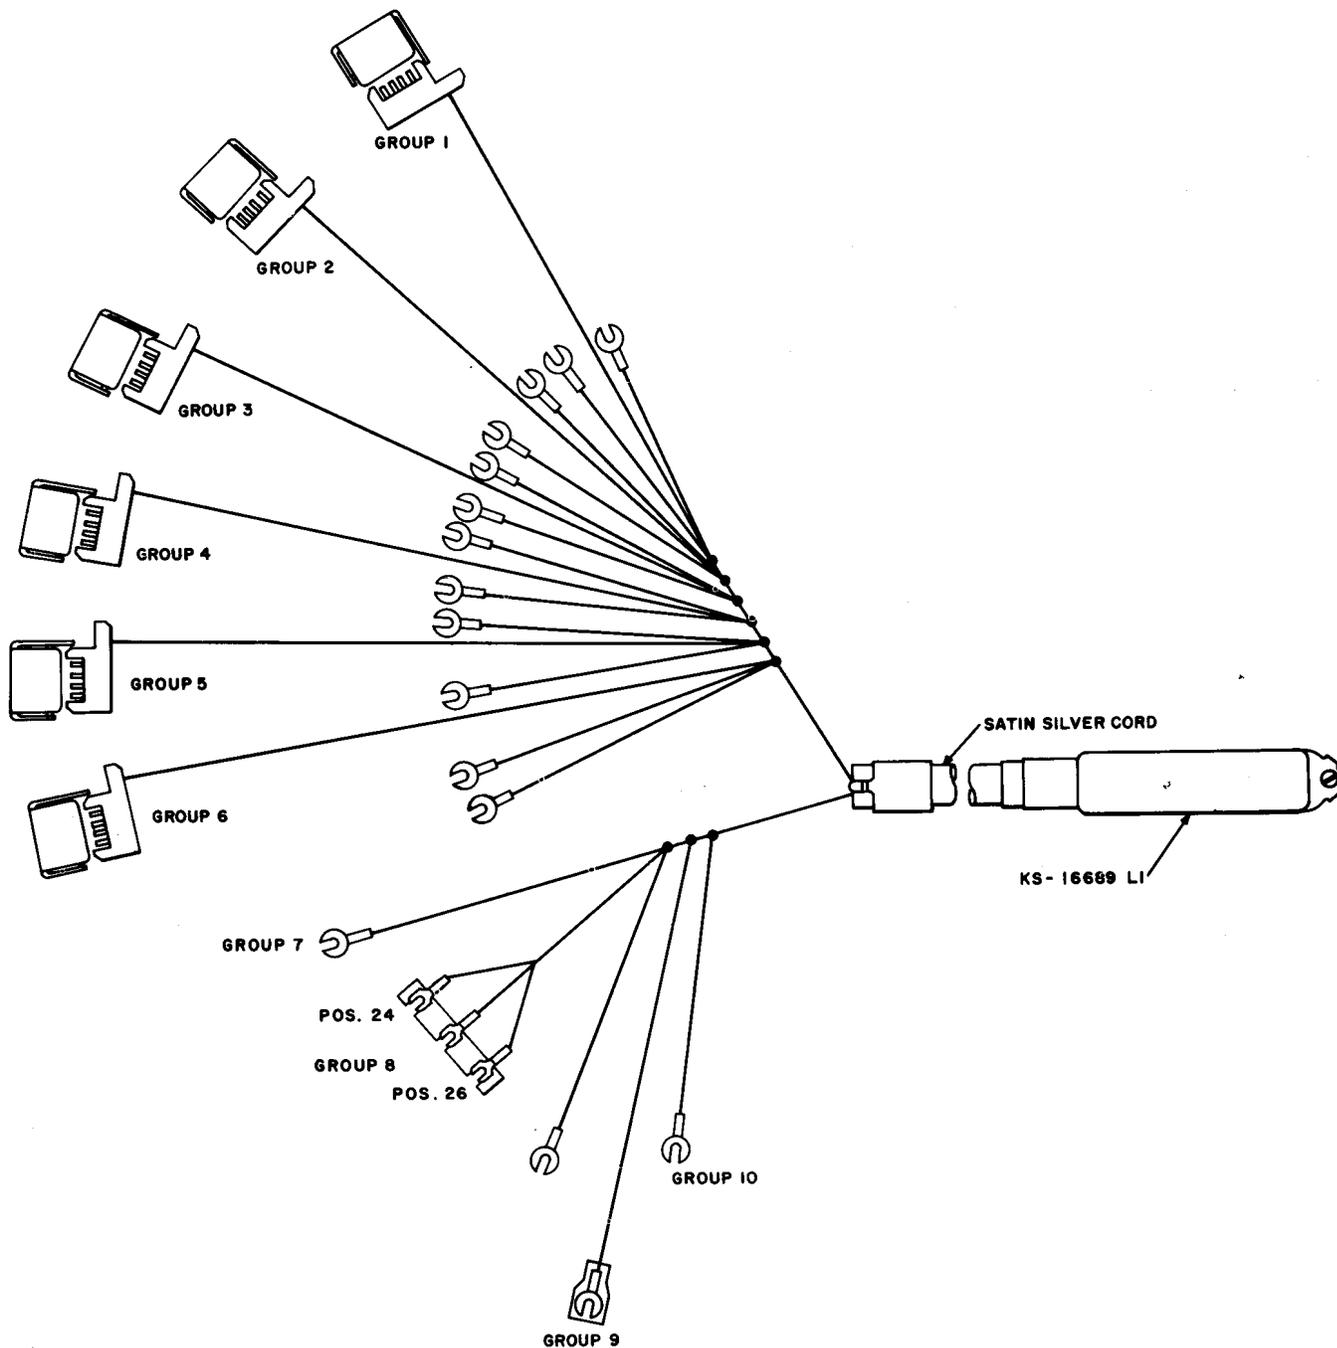

CORD, D75B-87

8 feet long

The code of the cord includes one KS-16370 L17 plug and six KS-16671 L1 plugs. The cord initially was intended for use with the No. 5 Crossbar Centrex.

