

DRIVE RING

1. GENERAL

1.01 Drive rings (Fig. 1) are used as intermediate supports of insulated wire on frame buildings when porcelain insulated building attachments are not required.

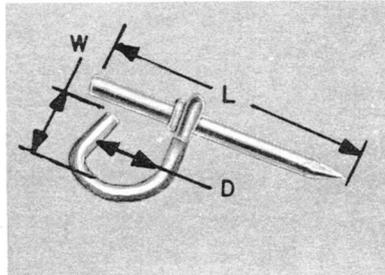


Fig. 1 — Drive Ring

1.02 The rings are furnished in seven sizes. Sizes and dimensions are shown in Table A.

TABLE A

Dimensions in In.			
Size	D	W	L
1/2	1/2	1/2	2-1/16
5/8	5/8	3/4	2-1/4
5/8L	5/8	3/4	2-3/4
7/8	7/8	1-1/2	2-9/16
7/8L	7/8	1-1/2	3-1/16
1-1/4	1-1/4	2-3/8	2-15/16
1-1/4L	1-1/4	2-3/8	3-7/16

1.03 Drive rings equipped with the D drive anchor can be used to attach wires to masonry surfaces. Drive rings and compatible D drive anchors are shown in Table B.

TABLE B

Anchor Size (in.)	Drive Ring Size (in.)
3/16 x 7/8	1/2
1/4 x 1	5/8 and 7/8
5/16 x 1-1/4	1-1/4