

## B STATION WIRE CLAMP

### 1. GENERAL

- 1.01 The B station wire clamp (Fig. 1) is used to support jacketed station wire.

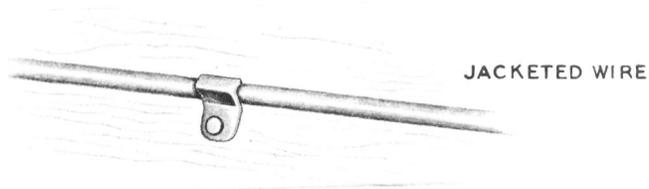


Fig. 1 — B Station Wire Clamp

- 1.02 The clamp is furnished with an ivory or light olive gray finish for inside use and a galvanized finish for outside use.
- 1.03 Table A indicates the fasteners to be used to attach these clamps to various surfaces.

TABLE A

Surface	Color	Fastener
Metal or Asbestos Siding	Light Olive Gray, Ivory or Galvanized	5/8-in. No. 6 self-tapping screw
		5/8-in. No. 6 RH galvanized wood screw. C plastic anchor, 3/16 x 1 in.
Wood, Indoors		5/8-in. No. 6 RH blued wood screw or inside wiring nail
Wood, Outdoors		5/8-in. No. 6 RH galvanized wood screw
Stucco (Wire and Paper Backing)		1-in. No. 6 self-tapping screw (Cadmium plated) or wall screw anchor (correct size)
Masonry		No. 2 B masonry fastener