

B IMPACT WRENCH

DESCRIPTION, CARE, MAINTENANCE, AND GENERAL USE

CONTENTS	PAGE
1. GENERAL	1
2. DESCRIPTION	1
3. CARE	2
4. MAINTENANCE	2
5. POWER SOURCES AND GROUNDING	3
6. EXTENSION CORDS	3
7. SAFETY PRECAUTIONS	3

1. GENERAL

1.01 This section covers the description, care, maintenance, and general use of the B impact wrench. The B socket and B and C power bits used with the wrench are described.

1.02 The wrench and socket are used in placing or removing nuts and drive screws of pole-line hardware. The wrench and bits are used in boring holes through wooden objects such as poles, log anchors, and building beams.

1.03 The inspection, maintenance, and general use of B and C power bits are covered in Section 081-745-105.

2. DESCRIPTION

B IMPACT WRENCH

2.01 The B impact wrench (Fig. 1 and 2) operates on 115 volts ac or dc, develops about 100 ft-lbs of torque, and is reversible. The wrench is equipped with a 7/16-inch hexagonal quick-change chuck, pistol-grip handle, nonlocking on-off trigger switch, reversing switch, 15-foot 3-wire cord, and

3-prong plug. One wire connects the grounding prong of the plug to the case of the wrench.

2.02 The direction of rotation of the chuck is determined by the position of the reversing switch.

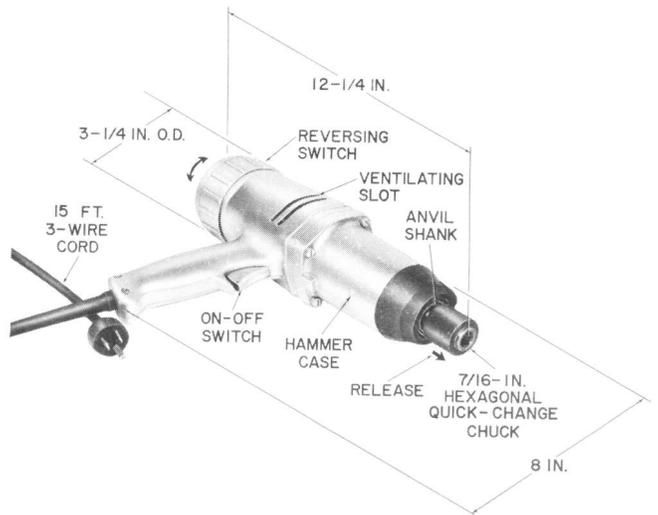


Fig. 1—B Impact Wrench with END Cap Reversing Switch

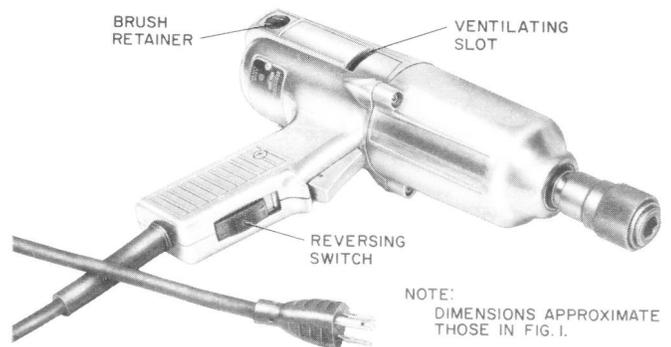


Fig. 2—B Impact Wrench with Reversing Switch in Handle

B SOCKET

2.03 The B socket (Fig. 3) has 8 points as shown and a 7/16-inch hexagonal shank to fit the chuck of the B impact wrench.

2.04 The socket is available in sizes shown in Table A:

TABLE A — B SOCKET — SIZES, DEPTHS, AND DIMENSIONS			
SIZE BOLT DIAMETER (IN.)	DEPTH OF SOCKET IN-SIDE (IN.)	OUTSIDE DIAMETER (IN.)	LENGTH OVERALL (IN.)
3/8	1	1-1/4	3-1/2
1/2	1-1/8	1-1/2	3-5/8
5/8	4	1-3/4	6-1/2
3/4	4	2	6-1/2
1	4	2-1/2	6-1/2

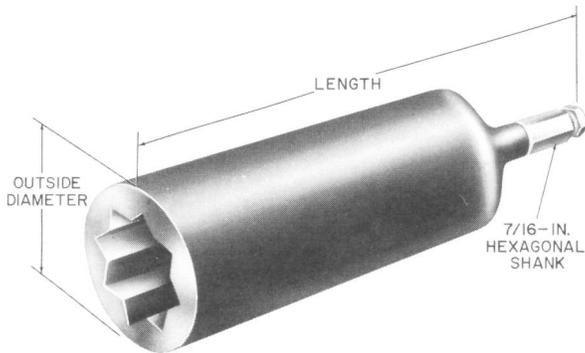


Fig. 3—B Socket

B AND C POWER BITS

2.05 The B power bit (Fig. 4) has a solid center twist, single spur and cutter, lead screw, and 7/16-inch hexagonal shank to fit the chuck of the B impact wrench. The C power bit (Fig. 5) is the same except for the hollow center twist.

2.06 B and C power bits have the same type of head as standard construction bits but are stronger and are described in Section 081-745-105.

2.07 B and C power bits may also be used with the C electric drill and the B ratchet brace.



Fig. 4—B Power Bit



Fig. 5—C Power Bit

3. CARE

B IMPACT WRENCH

3.01 *Never* carry the B impact wrench by the line cord as this may strain or damage the cord connections.

3.02 Avoid rough handling of the line cord. Dragging it over rough or sharp surfaces or allowing it to lie in oil or grease will decrease the life of the rubber jacket.

3.03 The life of the motor of this tool depends upon proper lubrication and ventilation. Be sure the ventilating slots (Fig. 1 and 2) are free from accumulation of dirt.

3.04 Keep the outside of the housing clean.

3.05 Before use, check that bolts and screws in the housing are tight.

3.06 After use, wipe the wrench and cord clean. Safely store in a designated location. See that the cord does not have sharp bends or kinks.

B SOCKET

3.07 After use, wipe the socket clean inside and out with an oily cloth and store with the B impact wrench.

4. MAINTENANCE

B IMPACT WRENCH

4.01 Before using, inspect the cord for damage to insulation or connectors.

4.02 *Do not make temporary repairs of any kind. Never tape over defects in the cord.* Return wrenches with damaged cords to the Western Electric Company for repairs.

4.03 A supervisor or designated person should make the following tests monthly using the KS-16990 L1 insulation test set (Section 105-270-100):

(a) Test the continuity of the wire in the cord from the grounding prong of the plug to the case of the wrench.

(b) Test the two remaining cord wires to assure that neither is shorted to the case of the wrench. Operate the trigger switch when making this test.

4.04 Return any wrench that fails either of the above tests for repairs in accordance with local instructions.

4.05 Inspect the brushes and commutator frequently. Loss of power and serious sparking are indications that the brushes are worn excessively or making poor contact with the commutator.

4.06 Before using the wrench, place a few drops of machine oil around the shank of the anvil (Fig. 1) where it emerges from the bushing at the front of the hammer case. Hold the wrench with the chuck uppermost.

4.07 Once each month, remove the hammer case and grease, if needed, the impact unit (Fig. 1) with a good grade of ball or roller bearing grease, lubricating the jaws, cam balls, and bearing surfaces. Do not use too much grease as this will cause the wrench to operate sluggishly. Do not apply grease to the cylindrical surface of the hammer since this is not a bearing surface.

4.08 Annually return the wrench for periodic cleaning of the hammer mechanism and lubrication of the gear housing and commutator bearing.

4.09 Wrenches shall be returned when repairs are major or field replacements are impractical.

5. POWER SOURCES AND GROUNDING

5.01 The wrench can be used with standard portable engine-generators. These power sources are normally ungrounded.

Caution: Care shall be taken when boring with the wrench to avoid coming in contact with any power circuits.

5.02 The wrench shall be grounded in accordance with Section 620-103-010.

6. EXTENSION CORDS

6.01 Where extension cords are required, use only the D extension cord.

7. SAFETY PRECAUTIONS

7.01 Check the voltage of the power source. Do not plug in the wrench if the voltage is not 115v ac.

7.02 Always wear eye protection.

7.03 Always switch off the wrench and allow it to stop before reversing the direction of rotation.

7.04 When changing the direction of rotation, make sure that the reverse cap (Fig. 1) is turned as far as it will go.

7.05 Do not push the bit into the wood; let the lead screw pull it.

7.06 Keep away from water and gas pipes or electric power lines when operating the wrench.

7.07 Be careful that clothing does not become entangled in the turning bit or socket.

7.08 Always disconnect the cord from the power source before lubricating or checking the wrench.

7.09 When driving small size nuts, do not impact too long or stripped threads and broken bolts will result.

SECTION 081-050-101

7.10 Do not press the trigger switch until the wrench is in working position. Be sure the direction of chuck rotation is correct for the work. Hold the wrench firmly during the operation.

7.11 Never use any part of the tool as a hammer or lever. Breakage, misalignment, or other extensive damage will result.

7.12 Never insert an object through the ventilating slots to hold or lock the fan. This will cause fan damage or motor failure.

7.13 Be sure socket is a snug fit in the wrench chuck and a close fit on the nut or drive screw. Loose fits cause loss of impact power.

7.14 Do not overload the wrench or continue to use it if it is not functioning properly.