
TRUNK LOCATION ADDRESS INFORMATION

EXPANDED 5XB ROTL

CONTENTS	PAGE
1. GENERAL	1
2. TRUNK GROUP LOCATION ADDRESS	2
3. PARTICULAR TRUNK LOCATION ADDRESS	2
 CHART	
1—Trunk Group Location Address	2
2—Particular Trunk Location Address	4

1. GENERAL

- 1.01 This appendix supplements Section 190-102-203, Issue 1. It contains detailed trunk location address information for the expanded 5XB ROTL.
- 1.02 This appendix is reissued to change referenced figure numbers and to reflect the change of the section number.
- 1.03 There are a maximum of 12 variables in a trunk location address for accessing a trunk by CAROT via an expanded 5XB ROTL. These 12 variables can be divided into two groups. One group, *trunk group location address*, is determined by the properties of the trunk group to which the trunk belongs. The other group, *particular trunk location address*, is determined by the properties of the particular trunk. When the trunk location addresses of a trunk group are compiled for the CAROT data base, only one trunk group address is required for each operational mode of the trunk group.
- 1.04 The service type of trunk group (TYP) entered in character position 17 (TT record of Trunk File Work Sheet) determines the information required for the trunk group location address and the particular trunk location address as shown in Fig. 1A. Once the value of TYP is determined, the variables contained in character positions 18 through 28 can be determined as explained in Parts 2 and 3 of this appendix.
- 1.05 There are seven service types relevant to the expanded 5XB ROTL. A trunk group may perform one, two, or three types of services, depending on the number of its operational modes. Thus, a trunk group or a particular trunk may require up to three trunk group or particular trunk location

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

addresses, depending on the number of possible modes of operation. The trunk location address used in CAROT 2 should be based on the service type that reflects the primary and alternate modes of traffic use of the trunk group.

2. TRUNK GROUP LOCATION ADDRESS (Fig. 2A)

2.01 As shown in Fig. 1A, character positions 17 and 23 through 28 contain the trunk group location address variables. The flow diagram shown in Fig. 2A can be used for determining the values of the trunk group variables.

2.02 The procedure in Chart 1 can be followed when initially using the flow diagram of Fig. 2A to code trunk group information in the TT record of the Trunk File Work Sheet.

3. PARTICULAR TRUNK LOCATION ADDRESS (Fig. 3A)

3.01 As shown in Fig. 1A, character positions 18 through 22 contain the particular trunk location address variables. The RA digit combines the number of route advances and allotted group information. While this is in many cases common to the entire trunk group, there are cases where individual trunks within a trunk group will be in different allotted groups and RA is therefore included here as a per-trunk variable.

3.02 The particular trunk information for trunks originating on the trunk link frame also consists of the trunk link frame number (FT, FU) and the busy test lead assignment on the TB relay (TT, TU). The busy test lead may be derived from the trunk link frame switch, appearance, and level for the early 160-point trunk link frames, Tables OO and PP of Section 190-102-203. In later 160-point link frames and 200-point frames the busy test is assignable and cross-connectable. The busy test lead should be given specifically on the traffic trunk orders along with allotted group, route advance, and trunk link frame number.

3.03 Using the flow diagram shown in Fig. 3A, the values of the particular trunk variables can be determined. The procedure in Chart 2 can be followed when initially using the flow diagram of Fig. 3A to code particular trunk information in the TT record of the Trunk File Work Sheet.

CHART 1

TRUNK GROUP LOCATION ADDRESS

STEP	PROCEDURE
1	Determine the value of TYP in (A).
2	Enter the value of TYP in character position 17.
3	Determine the value of MG in (B) for the particular TYP.
4	Enter the value of MG in character position 24.

CHART 1 (Contd)

STEP	PROCEDURE
5	<p>Depending on the value of TYP in (A), perform the applicable steps:</p> <p>(a) For TYP 0 or 9: Steps 6 through 12</p> <p>(b) For TYPE 1, 7, or 8: Steps 13 through 17</p> <p>(c) For TYP 2 or 4: Steps 18 through 21.</p> <p>TYP 0 or 9</p>
6	<p>Determine the values of CTA, CU, CGR (see note), and CRU in (C).</p> <p>Note: Marker leads CGA and CGB, if present, may be used for the grouping of classes of service or for rate treatment tens. The symbol CGR is not one of the trunk group variables, but its value can be recorded and used along with the FETL number to determine the value of CG in Step 9.</p>
7	Enter the values of CTA, CU, and CRU in character positions 25, 26, and 27, respectively.
8	Identify and record the FETL number as shown in (D).
9	Examine the FETL number and use the value of CGR to determine the value of CG.
10	Enter the value of CG in the character position 28.
11	Examine the FETL number to determine the value of TR in (E).
12	Enter the value of TR in character position 23.
	TYP 1, 7, or 8
13	Determine the values of CG and CTA in (C) (see note).
	<p>Note: Use SD- or CD-26002-01 (5XB completing marker circuit), if necessary. The set of incoming trunk class leads (TAN, TAN 1, TAN 2, TAN 3, TAN 4, TOL, INC, PCR, PCD, and PCD 1) applies to both trunk class groups. They should not be confused with the set of relays under the TCA group which bears almost the same designations.</p>
14	Enter the values of CTA and CG in character positions 25 and 28, respectively.
15	Identify and record the FETL number as shown in (D).
16	Examine the FETL number to determine the value of TR in (E).
17	Enter the value of TR in character position 23.

CHART 1 (Contd)

STEP	PROCEDURE
	TYPE 2 or 4
18	Enter 0 in character position 28, and 6 in character position 25 (see note). Note: For TYP 2 or 4, the class properties of the terminating call are associated with marker leads TCA and INC.
19	Identify and record the FETL or HOTL number as shown in (D).
20	Examine the HOTL or FETL number to determine the value of TR in (E).
21	Enter the value of TR in character position 23.

CHART 2

PARTICULAR TRUNK LOCATION ADDRESS

STEP	PROCEDURE
1	Determine the value of TYP in (A) or from the TGD form (Fig. 68 of Section 190-102-203).
2	Determine the value of RA in (B) for the particular TYP. If TYP = 2 or 4, no information about allotted group or route advance is required.
3	Enter the value of RA in character position 18.
4	Determine the values of FT, FU, TT, and TU in (C) for the particular TYP. If TYP = 4, no information about physical location is required. If TYP = 2, no information about FT is required.
5	Enter the values of FT, FU, TT, and TU in character positions 19, 20, 21, and 22, respectively.

A MESSAGE TRUNK GROUP ACCESSIBLE BY A LOCAL CUSTOMER (TYP=0) OR
A CCSA TRUNK GROUP ACCESSIBLE BY A LOCAL CUSTOMER (TYP=9).

CHARACTER POSITION	17	18	19	20	21	22	23	24	25	26	27	28
TRUNK GROUP	TYP						TR	MG	CTA	CU	CRU	CG
PARTICULAR TRUNK		RA	FT	FU	TT	TU						

A MESSAGE TRUNK GROUP ACCESSIBLE BY AN INCOMING TANDEM TRUNK (TYP=8) OR
A CCSA TRUNK GROUP ACCESSIBLE BY AN INCOMING TANDEM TRUNK (TYP=7) OR
A MESSAGE TRUNK GROUP ACCESSIBLE BY AN INCOMING INTERTOLL TRUNK (TYP=1).

CHARACTER POSITION	17	18	19	20	21	22	23	24	25	26	27	28
TRUNK GROUP	TYP						TR	MG	CTA	X	X	CG
PARTICULAR TRUNK		RA	FT	FU	TT	TU						

A PBX TRUNK GROUP WITH LLP, ACCESSIBLE BY A TERMINATING CALL (TYP=2).

CHARACTER POSITION	17	18	19	20	21	22	23	24	25	26	27	28
TRUNK GROUP	TYP						TR	MG	CTA	X	X	CG
PARTICULAR TRUNK		X	X	FU	TT	TU						

A HOTEL ACCESSIBLE BY A TERMINATING CALL (TYP=4).

CHARACTER POSITION	17	18	19	20	21	22	23	24	25	26	27	28
TRUNK GROUP	TYP						TR	MG	CTA	X	X	CG
PARTICULAR TRUNK		X	X	X	X	X						

LEGEND:
X = BLANK

Fig. 1A—Trunk Location Address Information (TT Record, Trunk File Work Sheet)

Ⓒ PHYSICAL LOCATION

CLASS-OF-SERVICE MARKER LEADS		RATE TREATMENT CLASS MARKER LEADS		TRUNK CLASS MARKER LEADS *	
TENS	UNITS	GROUP	UNITS	GROUP	CLASS
CTA 4, 7 (CTA=0)	CU 4, 7 (CU=0)	CGA (CGR=0)	CRU 4, 7 (CRU=0)	TGA (CG=0)	TAN (CTA=0)
CTA 0, 1 (CTA=1)	CU 0, 1 (CU=1)	CGB (CGR=1)	CRU 0, 1 (CRU=1)	TCB (CG=1)	TAN 1 (CTA=1)
CTA 0, 2 (CTA=2)	CU 0, 2 (CU=2)	NOT USED (CGR=0)	CRU 0, 2 (CRU=2)		TAN 2 (CTA=2)
CTA 1, 2 (CTA=3)	CU 1, 2 (CU=3)		CRU 1, 2 (CRU=3)		TAN 3 (CTA=3)
CTA 0, 4 (CTA=4)	CU 0, 4 (CU=4)		CRU 0, 4 (CRU=4)		TAN 4 (CTA=4)
CTA 1, 4 (CTA=5)	CU 1, 4 (CU=5)		CRU 1, 4 (CRU=5)		TOL (CTA=5)
CTA 2, 4 (CTA=6)	CU 2, 4 (CU=6)		CRU 2, 4 (CRU=6)		INC (CTA=6)
CTA 0, 7 (CTA=7)	CU 0, 7 (CU=7)		CRU 0, 7 (CRU=7)		PCR (CTA=7)
CTA 1, 7 (CTA=8)	CU 1, 7 (CU=8)		CRU 1, 7 (CRU=8)		PCD (CTA=8)
CTA 2, 7 (CTA=9)	CU 2, 7 (CU=9)		CRU 2, 7 (CRU=9)		PCD 1 (CTA=9)
			NOT USED (CRU=0)		

*THE SET OF INCOMING TRUNK CLASS LEADS (TAN, TAN 1, TAN 2, TAN 3, TAN 4, TOL, INC, PCR, PCD, AND PCD 1) APPLIES TO BOTH TRUNK CLASS GROUPS TCA AND TCB. THEY SHOULD NOT BE CONFUSED WITH THE SET OF RELAYS UNDER THE TCA GROUP WHICH BEAR ALMOST THE SAME DESIGNATIONS


Ⓑ MARKER GROUP, ETC

MARKER GROUP 00; 2-WIRE; NONCOIN (MG=0)
 MARKER GROUP 100; 2-WIRE; NONCOIN (MG=1)
 MARKER GROUP 200; 2-WIRE; NONCOIN (MG=2)
 MARKER GROUP 00; 2-WIRE; COIN (MG=4)
 MARKER GROUP 100; 2-WIRE; COIN (MG=5)
 MARKER GROUP 200; 2-WIRE; COIN (MG=6)

MARKER GROUP 00; 2-WIRE; NONCOIN (MG=0)
 MARKER GROUP 100; 2-WIRE; NONCOIN (MG=1)
 MARKER GROUP 200; 2-WIRE; NONCOIN (MG=2)
 MARKER GROUP 00; 4-WIRE; NONCOIN (MG=7)
 MARKER GROUP 100; 4-WIRE; NONCOIN (MG=8)
 MARKER GROUP 200; 4-WIRE; NONCOIN (MG=9)

Ⓐ SERVICE TYPE

MESSAGE, LOCAL ACCESSIBLE (TYP=0)
 MESSAGE, TANDEM ACCESSIBLE (TYP=8)
 MESSAGE, TOLL ACCESSIBLE (TYP=1)
 CCSA, LOCAL ACCESSIBLE (TYP=9)
 CCSA, TANDEM ACCESSIBLE (TYP=7)
 PBX, WITH LLP (TYP=2)
 HOME OFFICE TEST LINE (TYP=4)

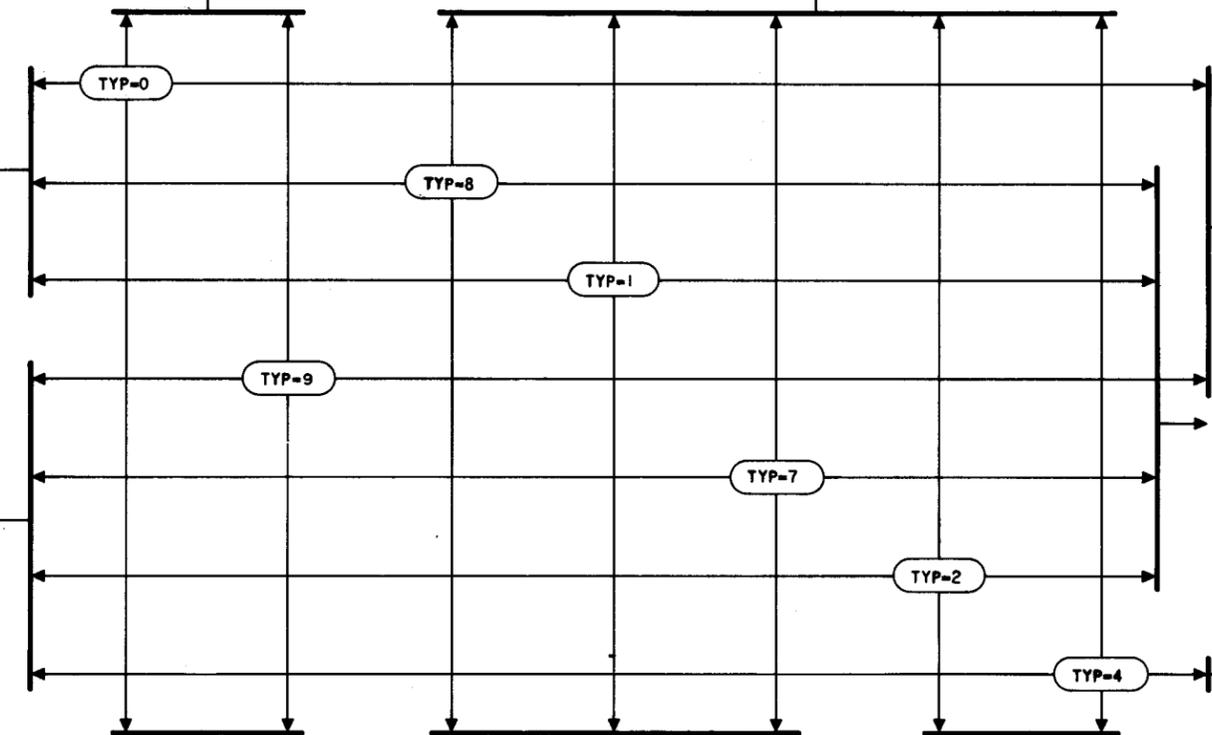

Ⓓ TEST LINE DIALING NUMBER

FAR-END TEST LINE DIALING NUMBER
 FOREIGN AREA CODE NOT USED; CGR=0 (CG=2)
 FOREIGN AREA CODE NOT USED; CGR=1 (CG=3)
 FOREIGN AREA CODE USED; CGR=0 (CG=4)
 FOREIGN AREA CODE USED; CGR=1 (CG=5)

FAR-END TEST LINE DIALING NUMBER

HOME OFFICE TEST LINE DIALING NUMBER

LOCAL TRANSLATOR, NO PREFIX (TR=0)
 LOCAL TRANSLATOR, PREFIX 1 (TR=1)
 LOCAL TRANSLATOR, PREFIX 0 (TR=2)
 LOCAL TRANSLATOR, PREFIX 8 (TR=3)
 2-DIGIT TRANSLATOR (TR=4)
 XII TRANSLATOR (TR=5)
 5-DIGIT TRANSLATOR (TR=9)

LOCAL TRANSLATOR, NO PREFIX (TR=0)
 TOLL TRANSLATOR (TR=8)
 5-DIGIT TRANSLATOR (TR=9)

OFFICE A (TR=6)
 OFFICE B (TR=7)
 5-DIGIT TRANSLATOR (TR=9)
 LOCAL TRANSLATOR, NO PREFIX (TR=0)

Ⓔ MARKER TRANSLATION

Fig. 2A—Flow Diagram for Use in Determining Trunk Group Variables

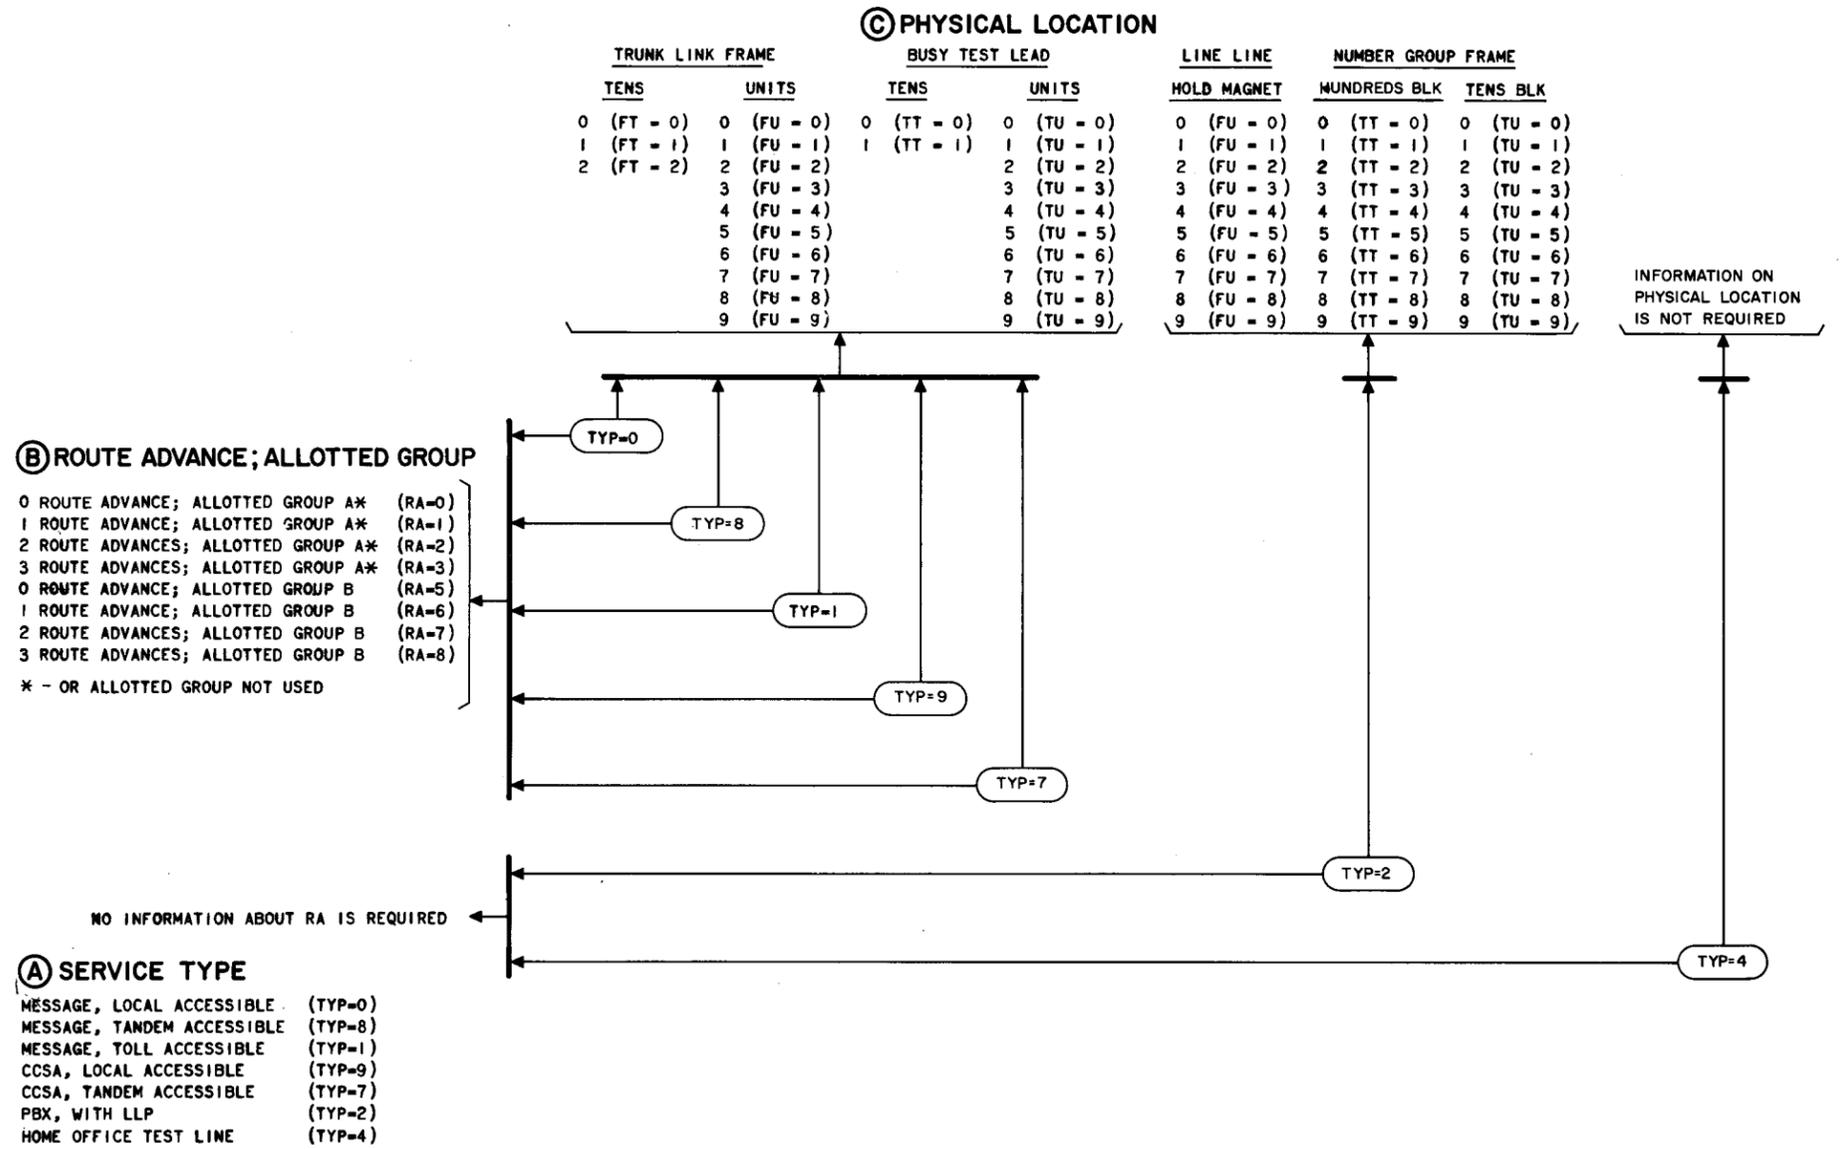


Fig. 3A—Flow Diagram for Use in Determining Particular Trunk Variables