

CONTEMPRA TELEPHONE SETS
DESCRIPTION

1. GENERAL

1.01 This practice covers the description of the Northern Electric Contempraphone QSK100AX (rotary dial) and QSK2100AX (digitone dial).

2. DESCRIPTION

2.01 The Contempra Set is a dial-in handset telephone which may be used as a desk or wall set. See Figure 1-a, b, and c.

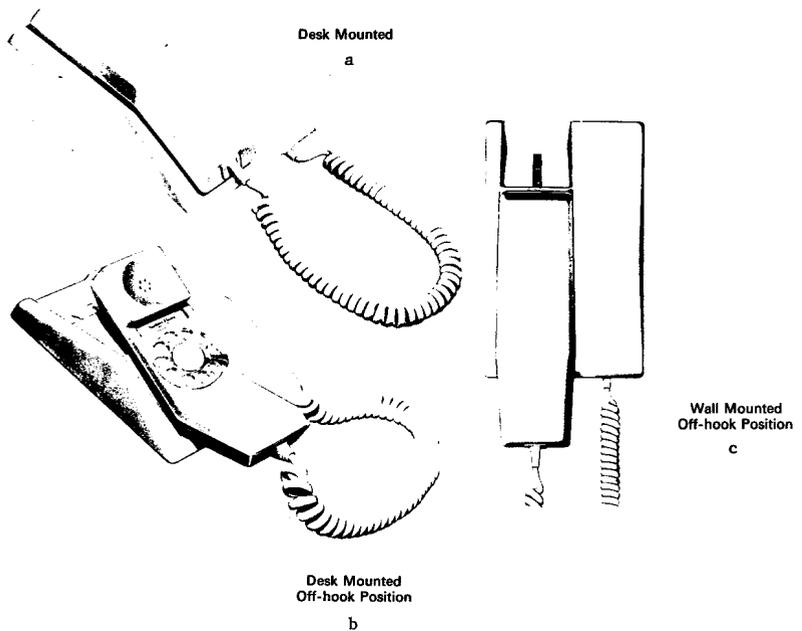


FIGURE 1

2.02 These telephones come in nine decorative colors with a number coding as follows:

Ivory	-50	Mauve	-22
Green	-51	Bright Red	-23
Light Beige	-60	Pale Yellow	-24
Warm White	-20	Deep Blue	-25
Deep Turquoise	-21		

2.03 The set uses a modified NE-D1B ringer which is used in the 600 Series Telephones. This modified ringer (NE-D1QA) uses a volume control wheel which requires a slight relocation of components.

2.04 The T1 and U1 Transmitter and Receiver units are used in conjunction with a repackaged network and are electrically compatible to the standard 500 Series.

2.05 The Contempra Set is equipped with non-skid pads for desk use, and a provision for wall mounting which includes entrance holes for concealed or surface wiring.


2.06 The dial finger wheel has a smaller diameter than that used in the 500 Sets, but the size of the finger holes has not been reduced proportionally, therefore, the ten finger holes occupy the full 360 degree circumference. The finger stop moves clockwise so that the actual rotational movement is more than 360 degrees. When dialing a selected number, the full rotational follow of the finger stop is required.

2.07 A rectangular recall button is located just below the dial (Figures 2 and 3) so the subscriber can disconnect a call by depressing the button like a switch hook.

2.08 The Contempra Set is designed so that the handset may be placed in an obvious and secure call-waiting position. When used as a desk set, see Figure 4; for wall mounted sets, see Figure 1c.

2.09 The ringer volume control wheel is located on the right side of the telephone. A clockwise rotation of the control wheel increases the volume, and a counterclockwise rotation decreases the volume of the ringer. See Figure 5.


2.10 Contempra Sets are authorized for use only in areas or companies approved by the St. Louis corporate office.

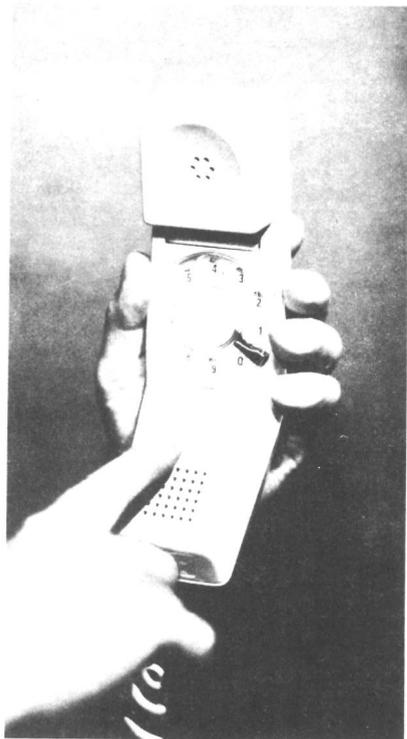


RECALL BUTTON
FIGURE 2



FIGURE 3

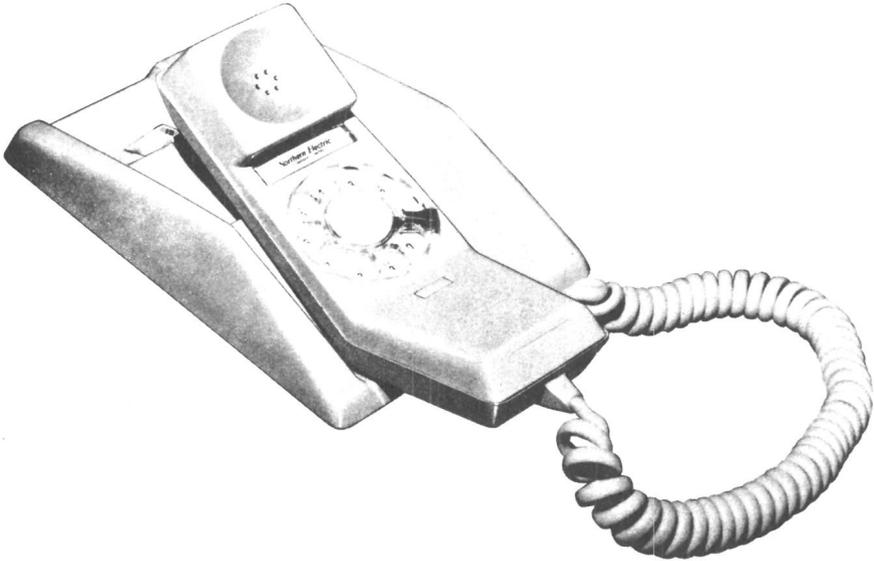

DESK MOUNTED CONTEMPRA TELEPHONE IN "OFF-HOOK" POSITION
FIGURE 4

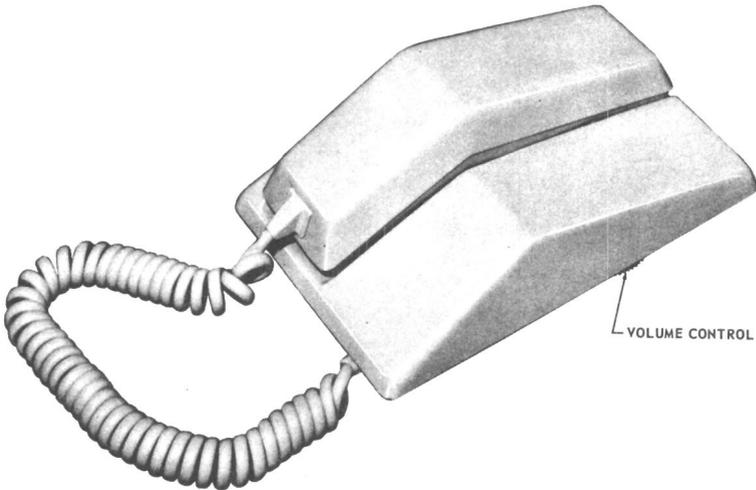

LOCATION OF RINGER VOLUME CONTROL WHEEL
FIGURE 5