


TELEPHONE SET
TYPE 703 (LR) 30 DESK
CONNECTIONS

1. GENERAL


- 1.01 This practice provides the connecting information necessary in the installation of the 703 (LR) 30 desk type telephone set.
- 1.02 The installed telephone must be provided with a separately mounted, external ringer, types 136, 137, 138 and 139 are recommended. See Figure 1 for ringer wiring diagram.

RINGER OPTIONS

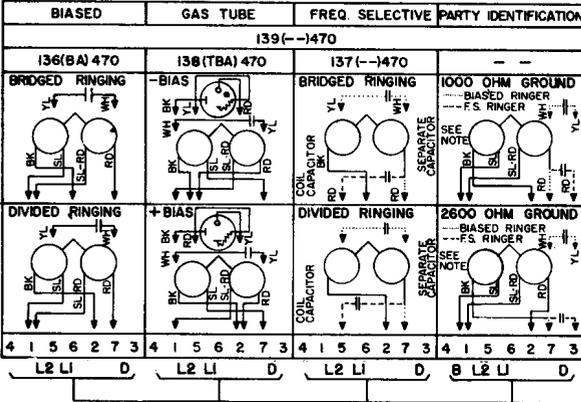


RINGER NOTES

1. Party Identification: Connect yellow mounting cord lead as shown by dashed lines. Mounting cord connections shown for ring party. For tip party reverse red and green cord conductors on ringer terminal board and use ring party station wiring.
2. 6-Conductor Mounting Cord: Yellow and black leads connected in parallel except for party identification.



MOUNTING CORD

For Manual Service:
 Replace dial with dummy plug and transfer WH-SL cradle switch lead from F to RR on network.

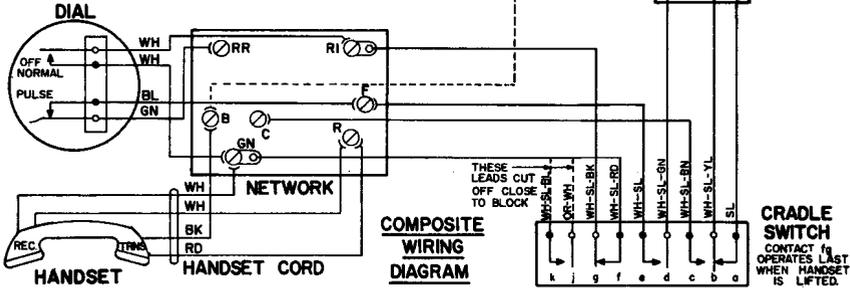

CIRCUIT DIAGRAM
 (INSTRUMENT ONLY)

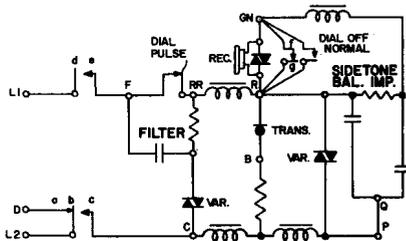


FIGURE 1. DIAGRAMS 703--(L)30- TELEPHONE