

## 2-LINE, ROTARY DIAL, WALL TELEPHONES

### REPLACEMENT PARTS

#### 1. GENERAL

**1.01** This document covers the 2-line, rotary dial, wall telephone. (See Figure 1.) An exploded-view drawing of the telephone with the major assembly groups (see Figure 2) and a replacement parts list (see Table A) are included.

**1.02** This section is reissued for the following reasons:

- (a) Issue 3 adds replacement parts for the full-modular (M) version of the 2-line, rotary dial, wall telephone.
- (b) Issue 2 corrected errors in the original issue.

**1.03** For additional information on description and installation of the telephones, refer to Section 50-555-100. The circuit labels appear in Section 50-555-102. Related documents of the CORTELCO Telephone Apparatus Practices Manual provide information on components.


**1.04** The Model 555 wall telephones are 2-line, rotary dial, anti-sidetone type units that operate efficiently over a wide range of loop resistances and line impedances.

**1.05** The Model 555 wall telephones are identified by a coded label affixed to the bottom of the base plate. Refer to Section 50-555-100 of the CORTELCO Telephone Apparatus Practices Manual for ordering information of complete telephones and for an explanation of each code number.



AW96-300

Figure 1: 2-Line, Rotary Dial, Wall Telephone

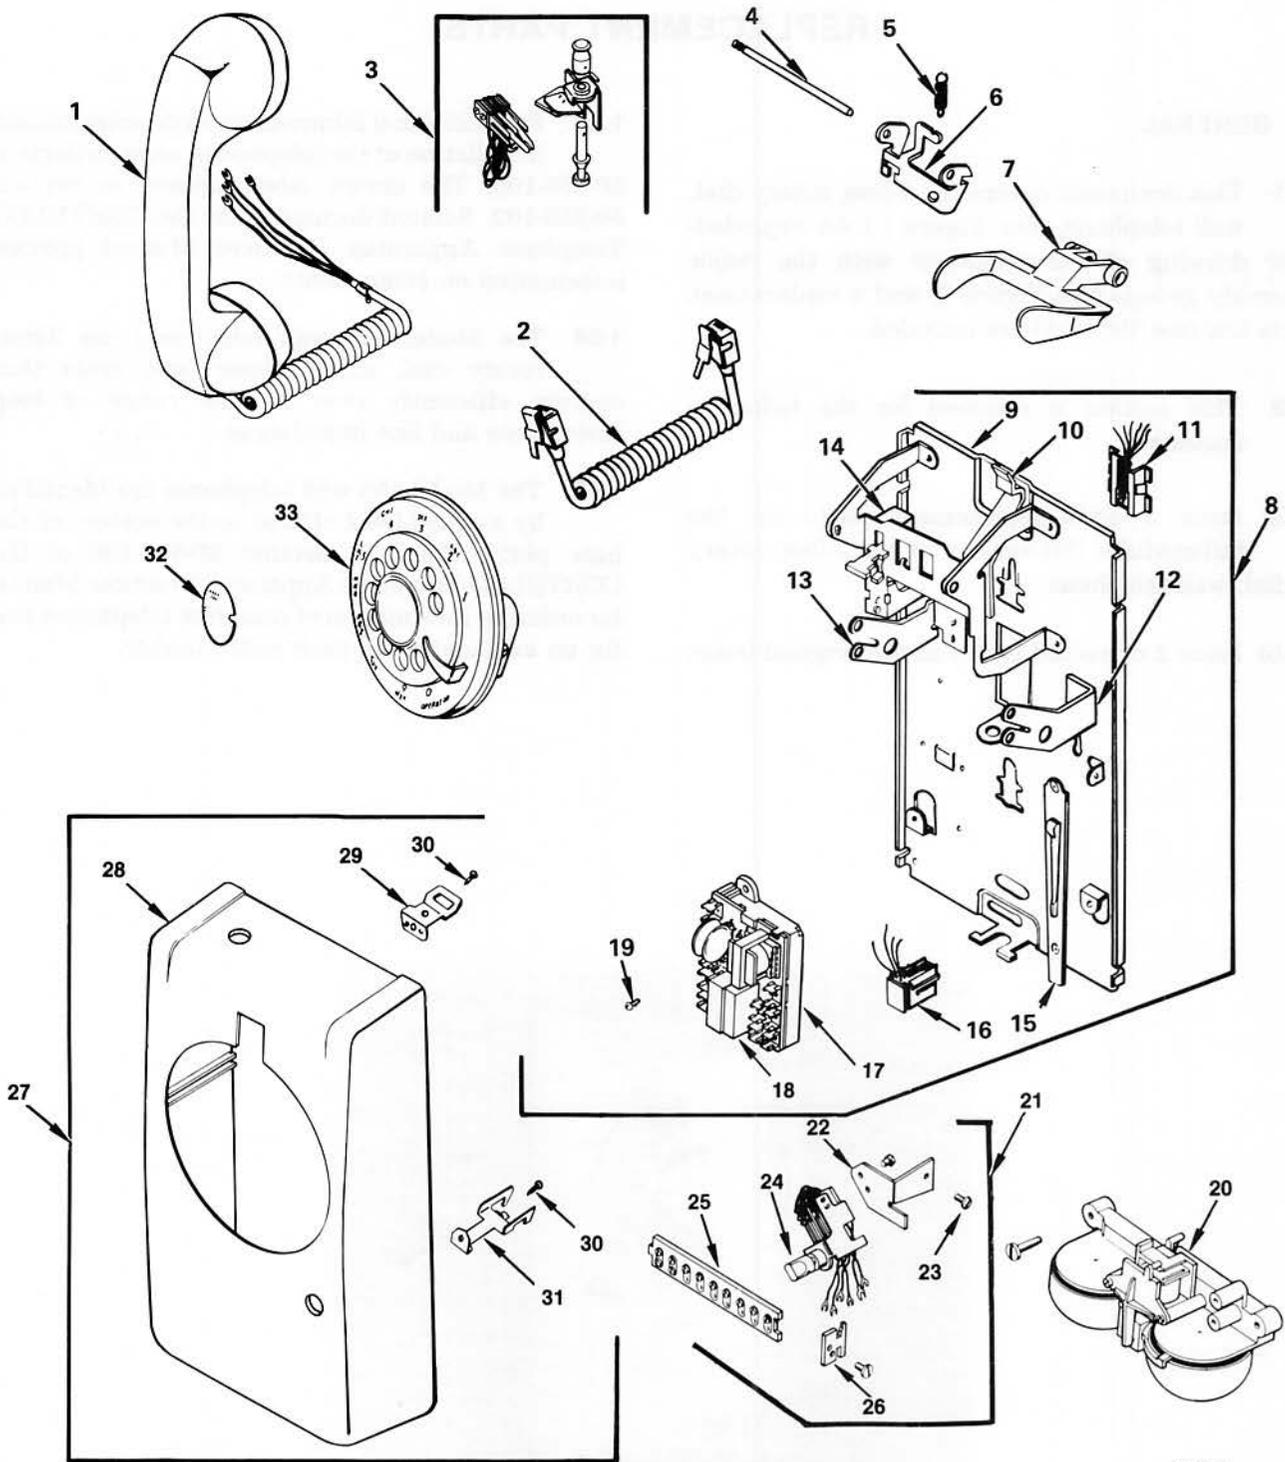

AW89-50

Figure 2: 2-Line, Rotary Dial, Wall Telephone, Exploded View

**TABLE A**  
**REPLACEMENT PARTS LIST**

INDEX NO	PART NUMBER	DESCRIPTION	QUANTITY USED	
			555/30	555/60
		<b>2-Line, Rotary Dial, Wall Telephone</b>		
1	0065**-0C2	Handset Assembly, Nonmodular <sup>1, 2</sup>	1	1
1	0065**-0M2	Handset Assembly, Modular <sup>1</sup>	—	1
2	9018**-072	Cord, Handset, Modular	—	1
3	084522-101	Hold Switch Assembly <sup>1</sup>	1	1
4	079304-101	Shaft, Handset Cradle	1	1
5	075307-101	Spring	1	1
6	079307-101	Bracket, Pivot Pin	1	1
7	184511-101	Cradle, Handset	1	1
8	182940-113	Base Assembly	1	1
9	182870-101	Plate, Base	1	1
10	182865-101	Hook Latch	1	1
11	183185-101	Plug Assembly, Wall, Modular	—	1
12	087055-102	Bracket, Dial (R. H.)	1	1
13	087055-101	Bracket, Dial (L. H.)	1	1
14	079399-101	Cradle Switch Assembly <sup>1</sup>	1	1
	079399-103	Spring Nest Assembly (Not Shown)	1	1
15	079308-101	Arm, Volume Control	1	1
16	182945-101	Jack Assembly, Handset Cord, Modular	—	1
17	182175-101	Spacer, Network	1	1
18	181427-101	PC Network (#183070-101) <sup>1</sup>	1	1
19	096407-103	Screw, Network Mounting	1	1
	031944-108	Rivet (Not Shown)	2	2
	182606-101	Rivet (Not Shown)	9	9
20	000130-OBA	Ringer, 4-Wire (With ANI) <sup>1, 2, 3</sup>	1	1
20	000130-NBA	Ringer, 4-Wire (With ANI) <sup>1, 3</sup>	1	1
20	000130-SBA	Ringer, 2-Wire (Less ANI) <sup>1, 2, 4</sup>	1	1
20	000130-PBA	Ringer, 2-Wire (Less ANI) <sup>1, 4</sup>	1	1
	095992-102	Screw (Not Shown)	2	2
21	079453-107	Key Assembly, Turn-And-Push	1	1
22	079920-101	Bracket, Pushkey	1	1
23	075366-101	Screw, Mounting	2	2
24	079453-101	Push And Turn Switch	1	1
25	079467-107	Terminal Board	1	1
26	086103-101	Plate, Mounting	1	1
27	180665-0**	Housing Assembly	1	1
27	183929-0**	Housing Assembly, Full-Modular	—	1
28	084521-0**	Housing	1	1
28	183928-0**	Housing, Full-Modular	—	1
29	079305-101	Bracket, Latch	1	1
30	075407-102	Screw, Latch Bracket And Catch	2	2
31	079397-101	Catch	1	1
32	075415-101	Card, Number	1	1
	183498-101	Card, Number, Stick-On (Not Shown)	—	1
33	0030**-00G	Dial Assembly, Metropolitan (Letters And Numerals) <sup>1</sup>	1	1
33	0030**-00D	Dial Assembly, Regular (Numerals Only) <sup>1</sup>	1	—

## Notes:

\*\* Substitute 2-Digit Color Code When Ordering.

<sup>1</sup> Refer To Components Parts Section Of This Manual For Assembly Parts List.

<sup>2</sup> This Product Has Been Discontinued, But Is Included To Provide A Source Of Information For Telephones Still In Service.

<sup>3</sup> The 000130-NBA Ringer Replaces The 000130-OBA Ringer.

<sup>4</sup> The 000130-PBA Ringer Replaces The 000130-SBA Ringer.

AW89-54