

STATION DIALS
1036 AND F56310 TYPES
IDENTIFICATION AND CONNECTIONS

1. GENERAL

1.01 This addendum supplements BSP 501-164-131. It is issued to provide connection information for the 1036 Type Dial to the 830 CT Type Tel. Set.

2. CONNECTIONS

2.01 Modify 830 Type Tel. Set as follows:

- (a) Remove (W) Line Switch lead from C of the Network and connect to terminal board punching 8.
- (b) Remove (BL) Rotary Dial lead and (G) Pick Up Key lead from F of the Network and connect to terminal board punching 18.
- (c) Terminate one lead from 185A Network to terminal board punching 18 and remaining lead to terminal board punching 17.
- (d) Remove the (BL-G) Rotary Dial lead from RR of the Network and connect to terminal board 17.
- (e) Remove (R) Line Switch lead and (W) Handset lead from GN of the Network and connect to terminal board punching 19.
- (f) Remove (R) Handset lead from R of the Network and connect to terminal board punching 23.
- (g) Remove the (T1) Strap from RR of the Network and terminal board punching 25.


2.02 Connect 1036 Dial to 830 Type Tel. Set as follows:

- (a) Connect (V-S) lead (T.T. Dial) to C of the Network.
- (b) Connect (V-G) lead (T.T. Dial) to RR of the Network.
- (c) Connect (W-BL) lead (T.T. Dial) to terminal board punching 8.
- (d) Connect (Y-GR) lead (T.T. Dial) to terminal board punching 9.
- (e) Connect (BL-W) lead (T.T. Dial) to terminal board punching 17.

ADDENDUM 501-164-131SN


- (f) Connect (W-BR) lead (T.T. Dial) to terminal board punching 25.
- (g) Connect (O-W) lead (T.T. Dial) to GN of the Network.
- (h) Connect (BR-W) lead (T.T. Dial) to terminal board punching 19.
- (i) Connect (W-S) lead (T.T. Dial) to R of the Network.
- (j) Connect (S-W) lead (T.T. Dial) to terminal board punching 23.
- (k) Connect (S-V) lead (T.T. Dial) to B of the Network.
- (l) Connect (GR-Y) lead (T.T. Dial) to terminal board punching 23.
- (m) Connect (W-O) lead and (G-V) lead (T.T. Dial) to terminal board punching 28.

TERMINAL BOARD
IN SET

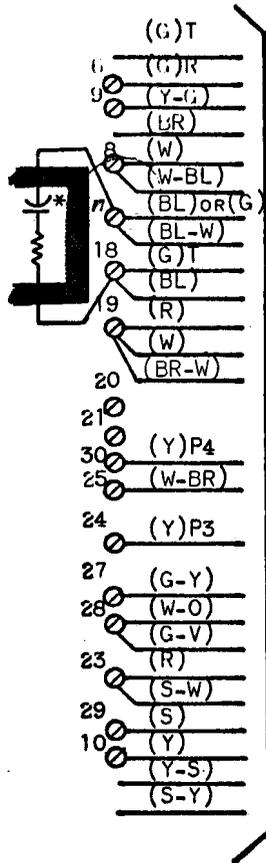


*185A NETWORK

LINE SWITCH

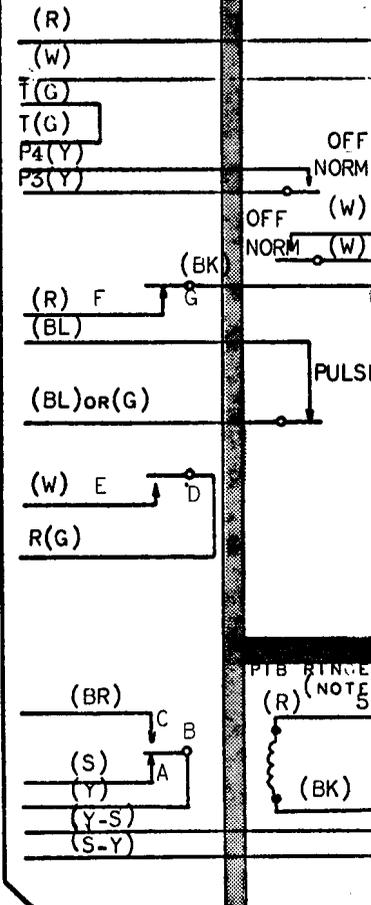


8C OR
8A DIAL


425E OR 4228A NETWORK

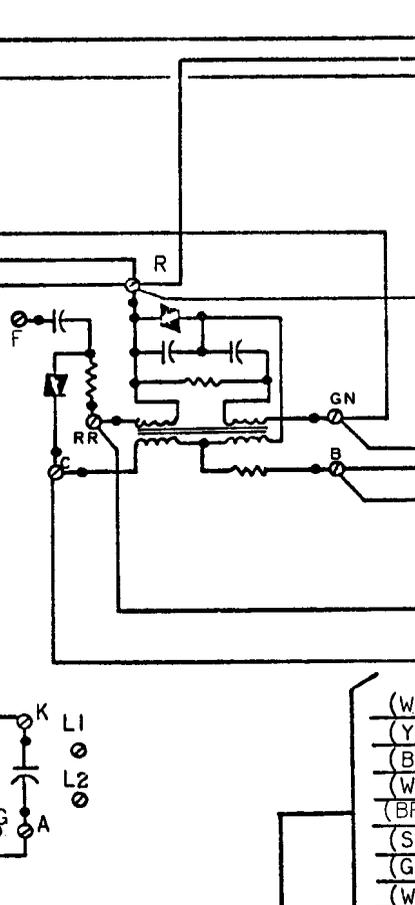

HANDSET JACK



1035C3A DIAL

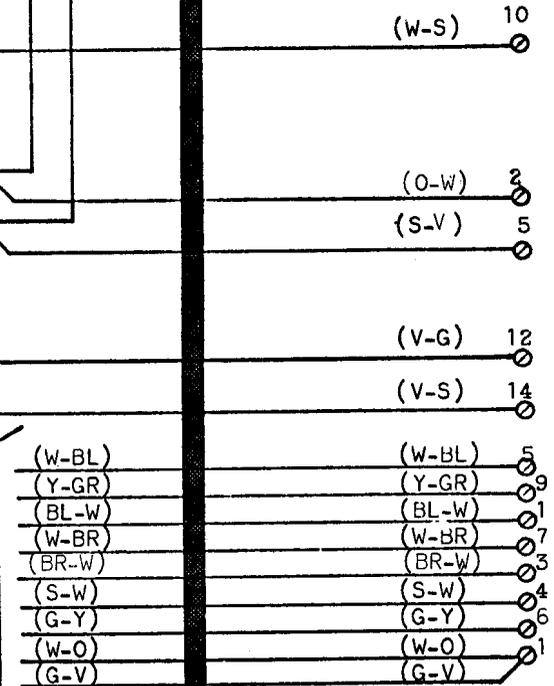

1036E

DIAL CONNECTIONS TO 830 TYPE TEL. SET