

SERVICE

213A, B, C, AND E HAND TELEPHONE SETS

1. GENERAL

1.01 This section contains connection information for 213-type hand telephone sets formerly found in Sections 502-304-400 and 502-304-401 which are hereby canceled.

1.02 The 213A and C are the same as the 213B with the exception of the type of dial number plate furnished. The 213B has the standard dial number plate with black letters and red numerals.

TABLE A
LINE AND RINGER CONNECTIONS
685A OR 686A SUBSET USED WITH 213A, B, C, OR E HAND TELEPHONE SET

WIRE OR LEAD	COLOR	RING PARTY	TIP PARTY (NOTE 1)	NEGATIVE RING PARTY (NOTE 1)	POSITIVE RING PARTY (NOTE 1)
				1 AND 5	3 AND 7
Ringer Leads (Note 2)	R BK S S-R	L2 G K* 1	L2 G K* 1	G G A* K*	L2 L2 A* K*
426A Tube Leads (3 elements) (686A only)	BK Y R			K* L2 G	K* G L2

* — Terminal on network

Notes:

1. Reverse tip and ring for tip party service.
2. To silence ringer permanently, connect (R) and (BK) ringer lead to K on the terminal strip.

**Reprinted to comply with modified final judgment.

TABLE B
ASSOCIATED APPARATUS

CLASS OF SERVICE	SUBSET
Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	685A
4-Party Full Selective 8-Party Semiselective	686A

* No message rate or tip-party identification can be provided for tip-party station.


TABLE C
61M FILTER CONNECTIONS
(NOTE)

FILTER LEADS	FILTER LEAD TERMINATIONS
BK	BK of dial
Y	Y of dial
R	BK of line switch

Note: The 213-type sets are arranged for, but not equipped with, a 61M filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the line switch, connect filter as shown in table.

TABLE D
COMBINATION OF APPARATUS

HAND TEL SET CODE	COMPONENTS				
	HANDSET	HANDSET MOUNTING	DIAL OR APPARATUS BLANK	DIAL MOUNTING	TYPE HANDSET CORD
213E-3E (As furnished)	E1E-3	G3-3	Number Card Holder	—	H-3
213E-3F (As furnished)	F1A-3 F1G-3				
213E-3F (Modified)	F4A-3				
213B-3E (As furnished)	E1E-3		4H or 5H	43A-3	
213B-3F (As furnished)	F1A-3 F1G-3		5H or 6A		
213B-3F (Modified)	F4A-3		6A		

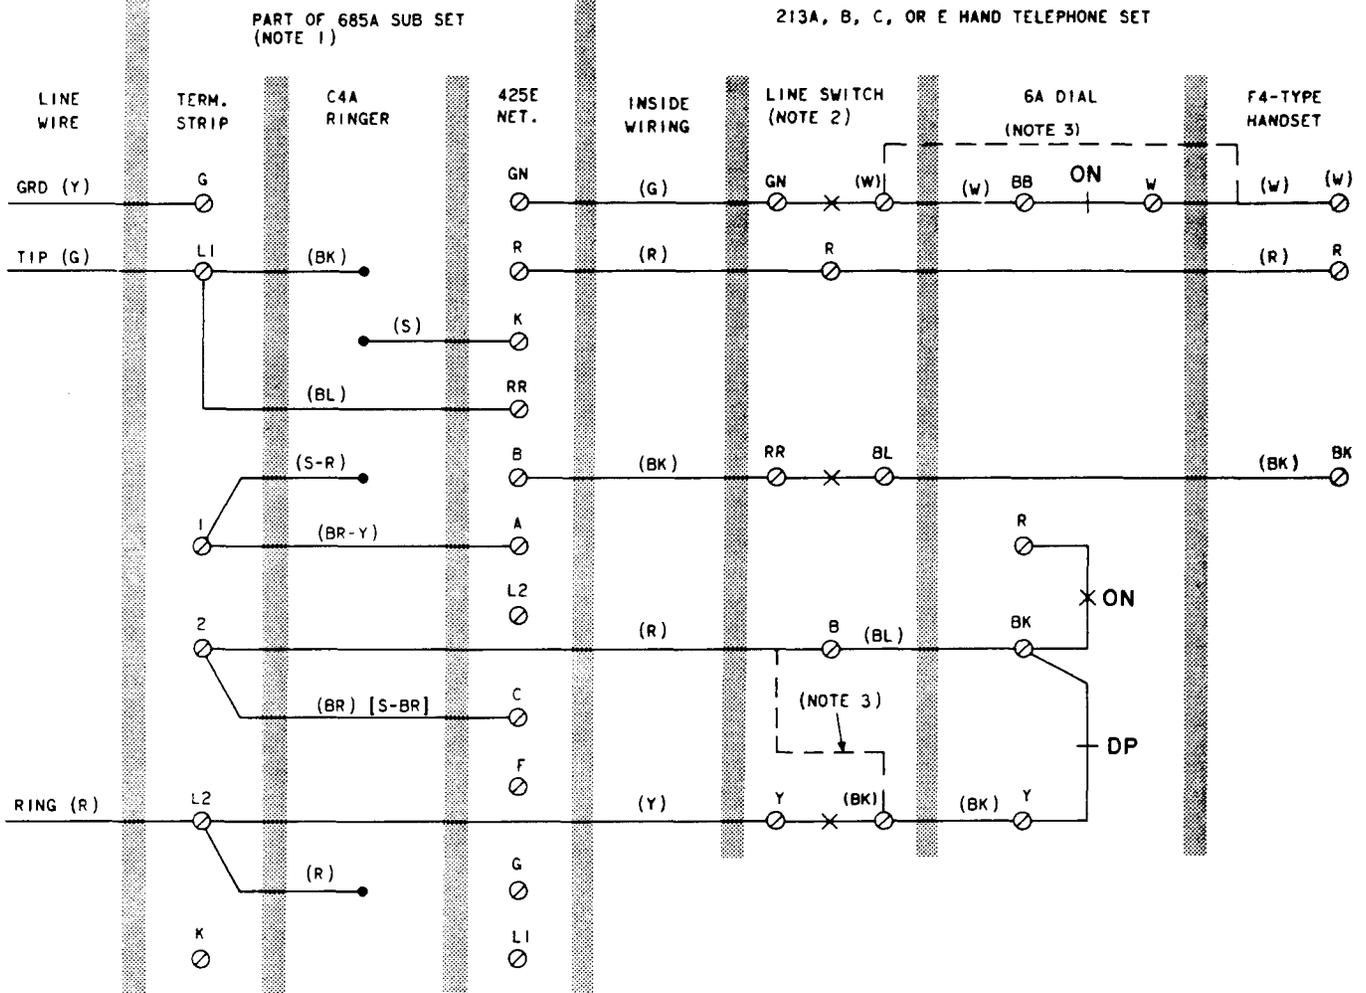

NOTES:

1. WIRED FOR BRIDGED RINGING, REFER TO TABLE A FOR OTHER CLASSES OF SERVICE.
 2. REMOVE (R) STRAP BETWEEN R OF DIAL AND R OF LINE SWITCH.
 3. DOTTED LINES INDICATE MANUAL SET CONNECTIONS.
- () - CURRENT COLOR CODE
 [] - MD COLOR CODE
 DP - DIAL PULSE
 ON - DIAL OFF NORMAL CONTACT

TPA 551171

Fig. 1—213A, B, C, or E Hand Telephone Sets, Connections Used With 685A Subscriber Set