

TABLE B
554A AND B TELEPHONE SETS
MODIFICATION FOR
"A" LEAD CONTROL
CURRENT COLOR CODE

WIRE OR LEAD		REMOVE FROM NETWORK	CONNECT TO NETWORK	CONNECT TO TERM. STRIP
Switch Hook Assembly	(W)	F	C	
	(BR)	C	G	
Ringer Leads	(R)	L2		3
	(BK)	G		4
Line Wire in Set	Tip	L1	F	
	Ring	L2	L1	
	"A" Lead		L2	

() Indicates current color code

TABLE C
554A AND B TELEPHONE SETS
MODIFICATIONS FOR
"A" LEAD CONTROL
MD COLOR CODE

WIRE OR LEAD		REMOVE FROM NETWORK	CONNECT TO NETWORK	CONNECT TO TERM. STRIP
Switch Hook Assembly	[S-W]	F	G	
Ringer Leads	(R)	L2		3
	(BK)	G		4
Line Wire in Set	Tip	L1	F	
	"A" Lead		L1	

() Indicates current color code

[] Indicates MD color code

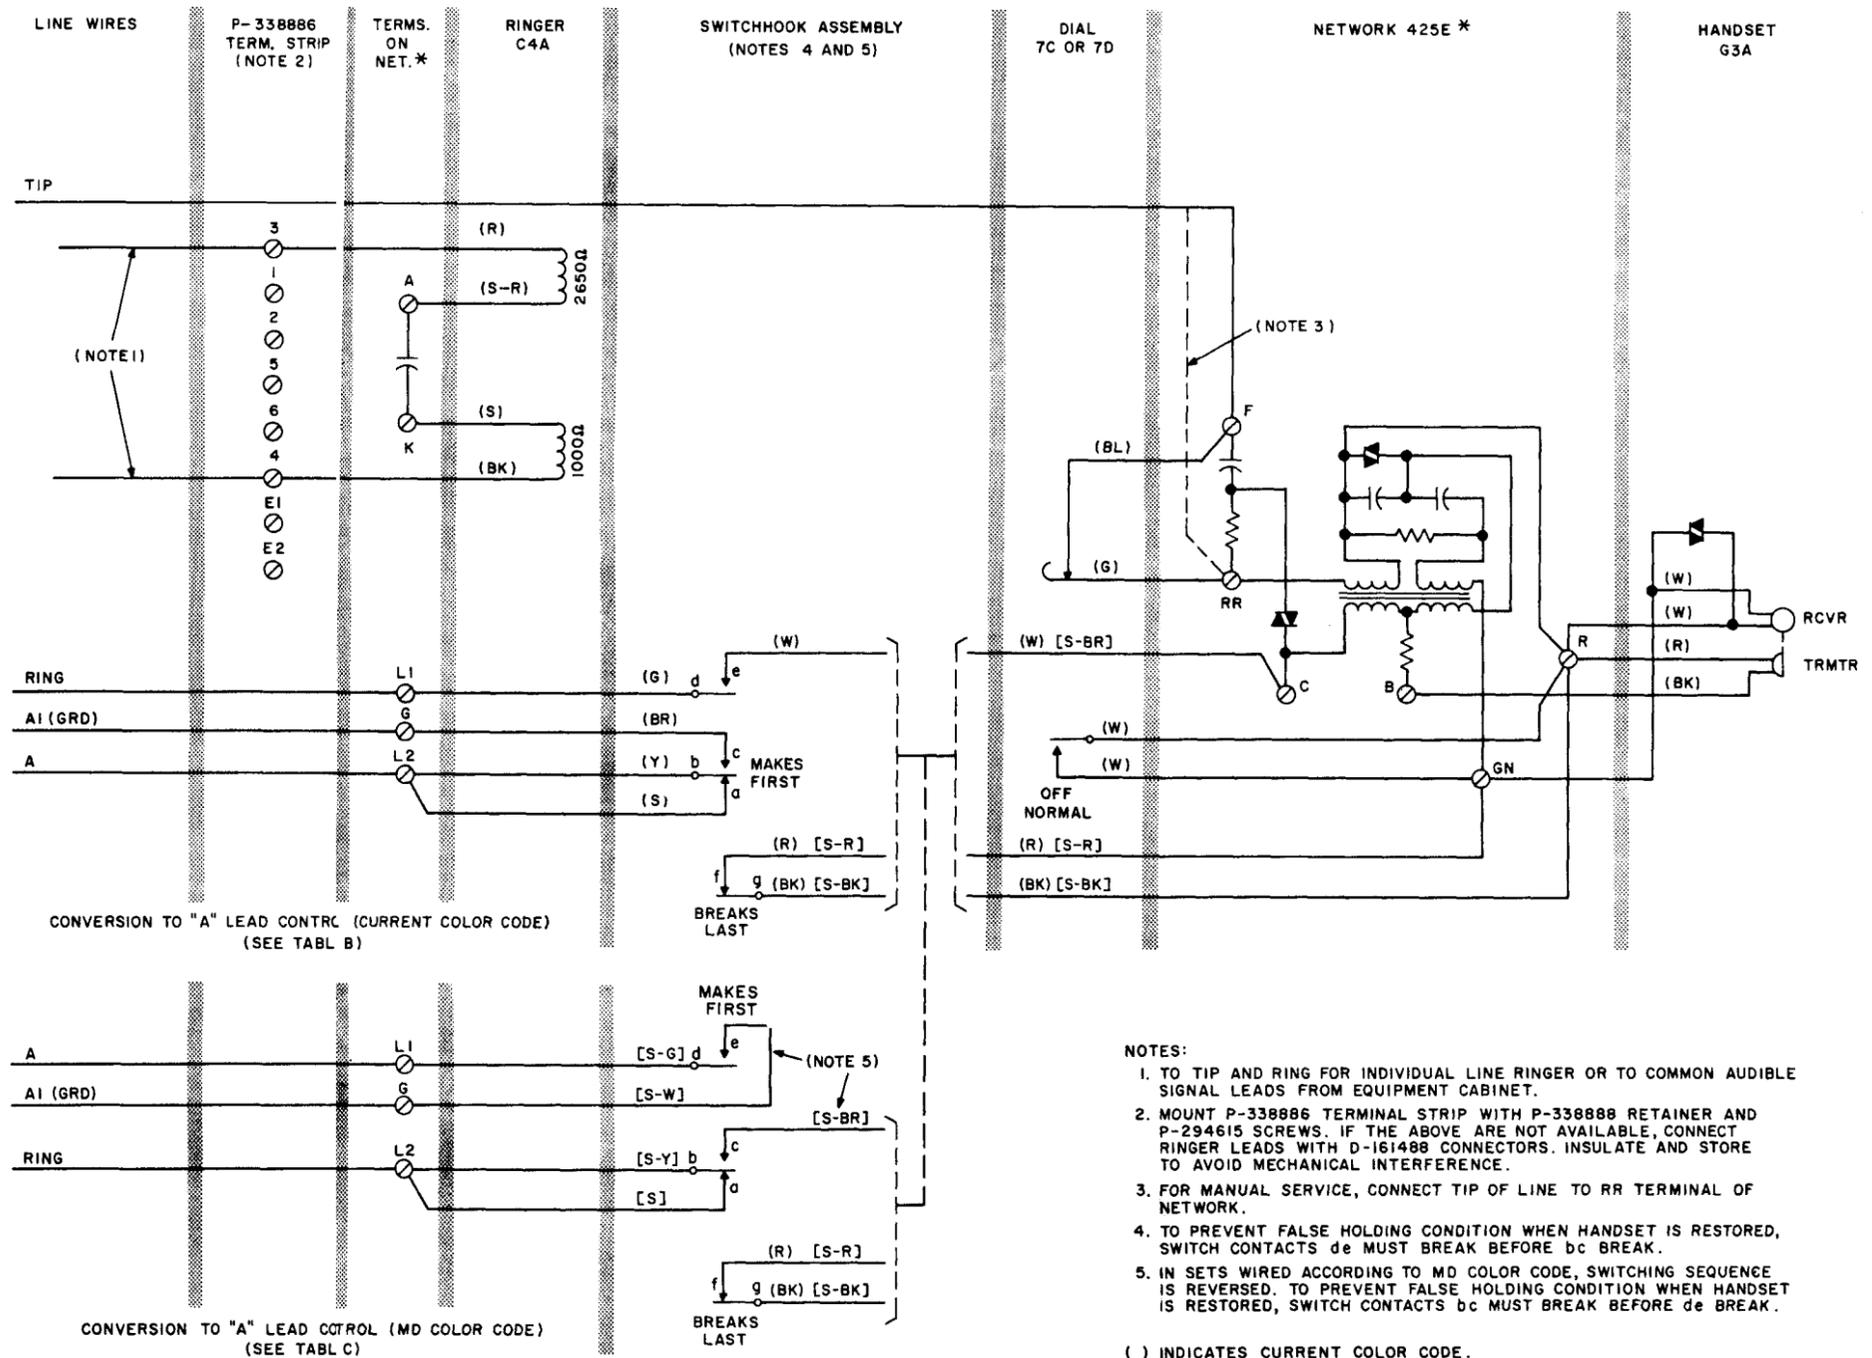


Fig. 2 — 554A and B Telephone Sets Revised for A Lead Control

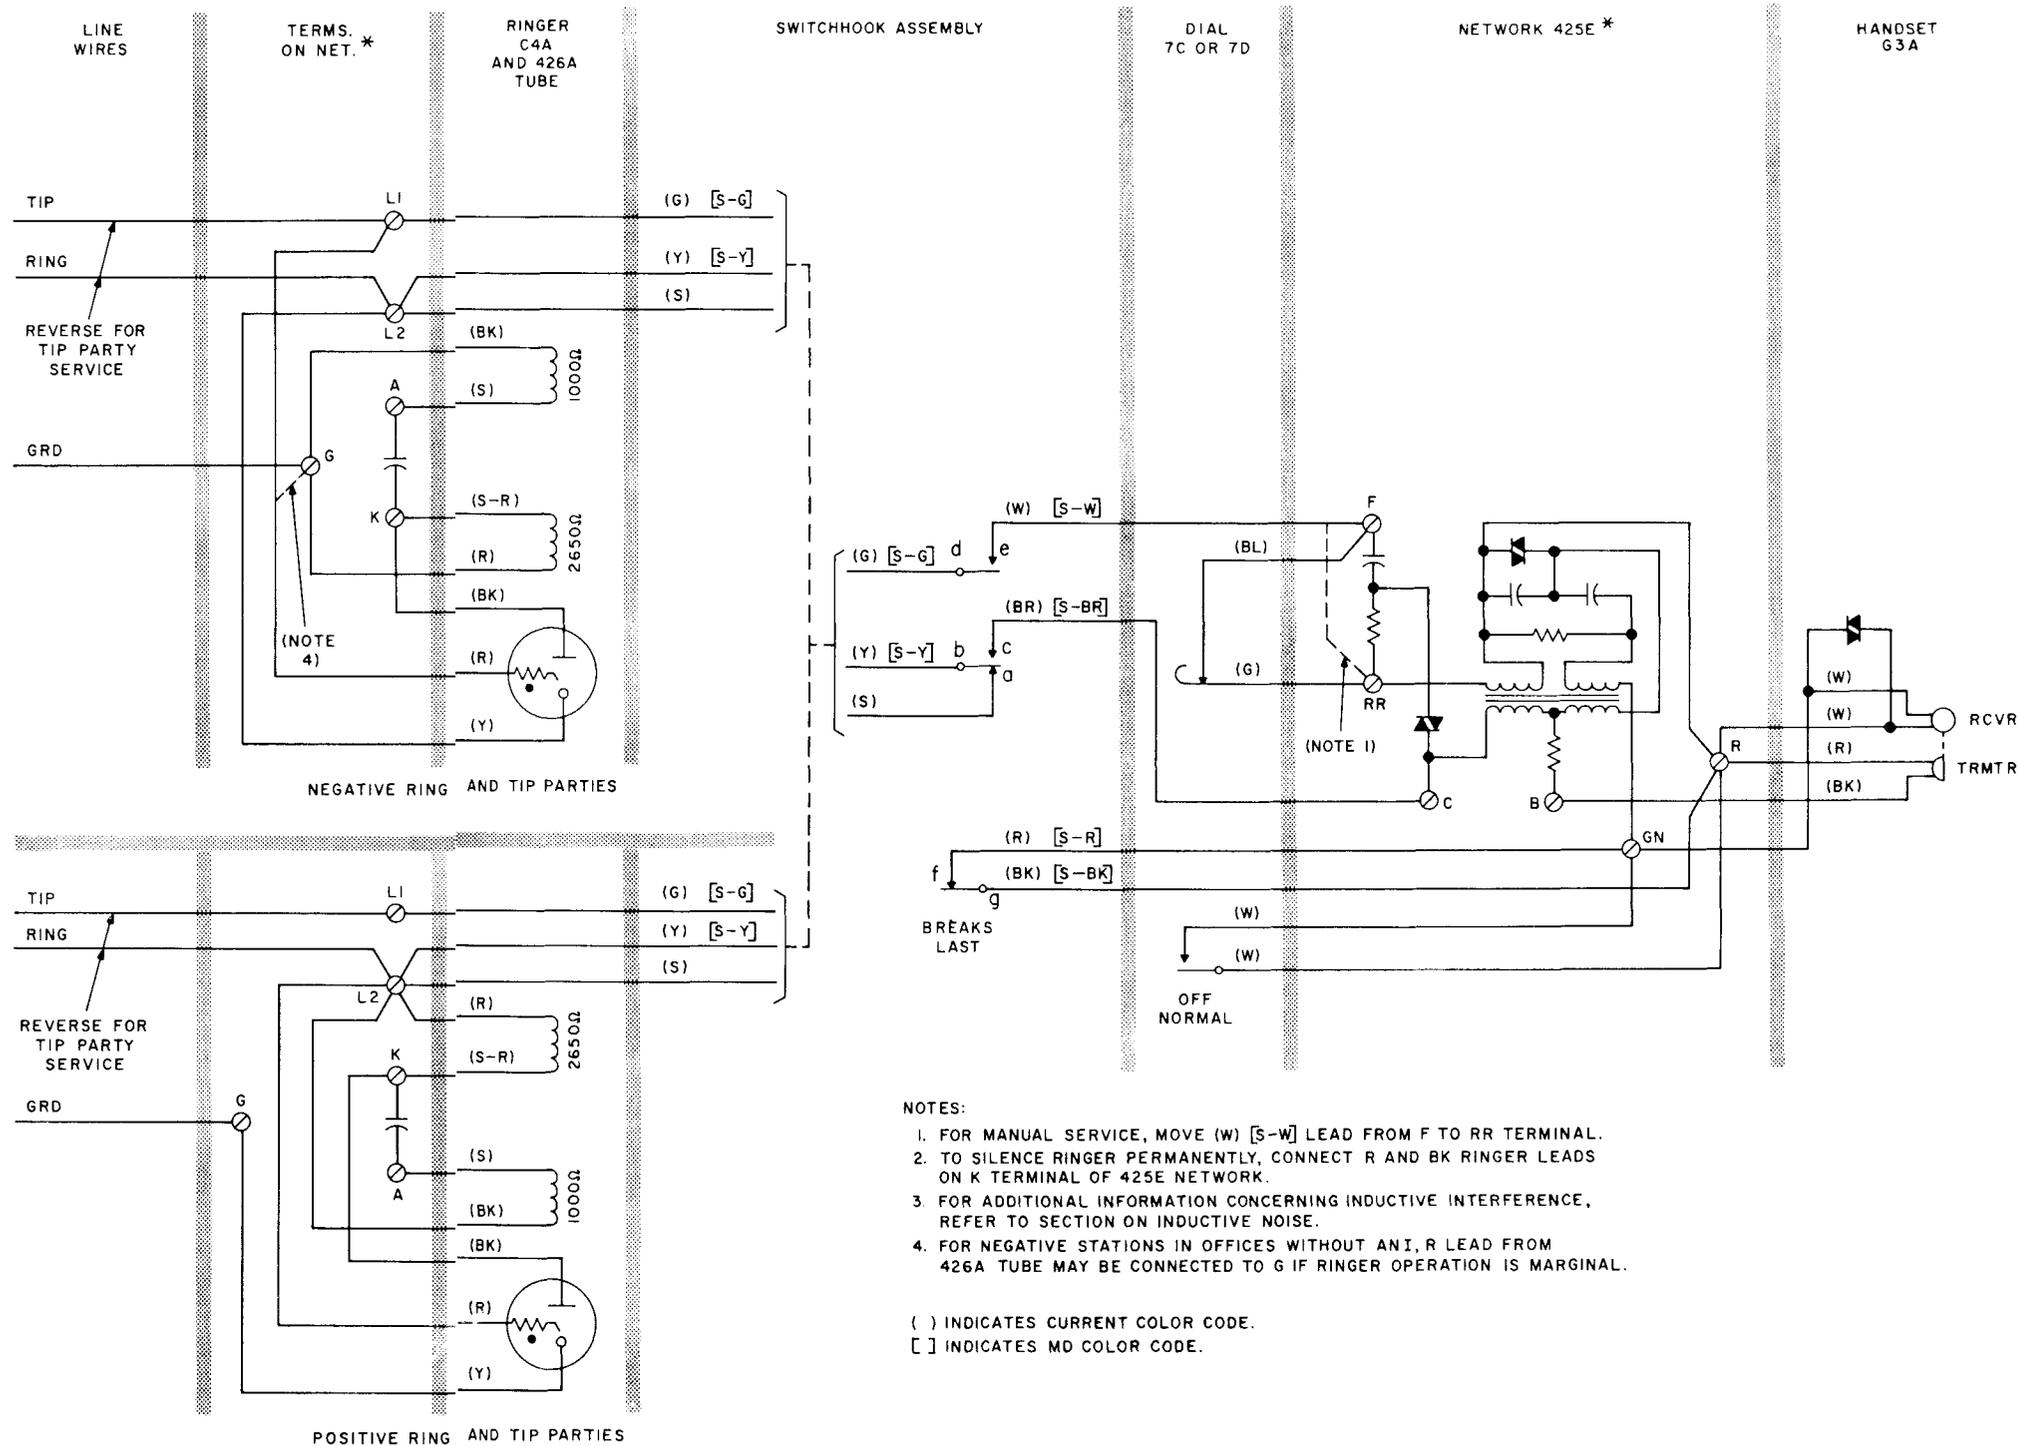


Fig. 3 — 556A and B Telephone Sets, Connections

TABLE D
556A AND B TELEPHONE SETS
LINE, RINGER, AND TUBE CONNECTIONS

WIRE OR LEAD		NEGATIVE (-) PARTIES		POSITIVE (+) PARTIES		
		1-5	2-6	3-7	4-8	
		RING	TIP	RING	TIP	
Ringer Leads		R	G	G	L2	L2
		BK	G	G	L2	L2
		S	A	A	A	A
		S-R	K	K	K	K
426A Tube (3 Element) See Note 3, Fig. 3		R	L1 or G	L1 or G	L2	L2
		BK	K	K	K	K
		Y	L2	L2	G	G
Line Wire in Set	Ring	R	L2	L1	L1	L1
	Tip	G	L1	L2	L2	L2
	Grd	Y	G	G	G	G
4-ELEMENT ELECTRON TUBE CONNECTIONS TO REDUCE INDUCTIVE NOISE						
425A Tube (4 Element) See Note 3, Fig. 3		R	L1	L1	L2	L2
		G	L2	L2	L1	L1
		BK	G	G	K	K
		Y	K	K	G	G