

TELEPHONE SETS — 1500D  
CONNECTIONS

TABLE A  
POLARITY GUARD CONNECTIONS  
(P-90D052 GUARD ASSEMBLY)

LEAD		REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	*	C		S
Polarity Guard	G W		RR C	

\* Depending on class of service per Table B.

TABLE B  
LINE AND RINGER CONNECTIONS

WIRE LEAD		INDIVID. OR BRIDGED	RING PARTY	TIP PARTY		
				NO IDENT GROUND	IDENTIFYING GROUND	
					1000Ω	2650Ω
Mounting Cord at Connecting Block	R	R	R	R	G	G
	G	G	G	G	R	R
	Y	G	Y	Y	Y	Y
Ringer Leads	R	L2	L2	L1	K	B
	BK	G	G	G	G	B
	S	K	K	K	B	K
	S-R	A	A	A	B	G
Switch Hook Leads	(S)	L2	L2	L2	A	A
	(W) [S-W]	F	F	F	C	C
	(BR) [S-BR]	C	C	C	F	F

**Notes:** To permanently silence ringer, insulate and store.

1. For all classes of service except identifying ground — (BK) ringer lead.
2. For 1000 ohm ground — (S-R) ringer lead.
3. For 2650 ohm ground — (BK) ringer lead.

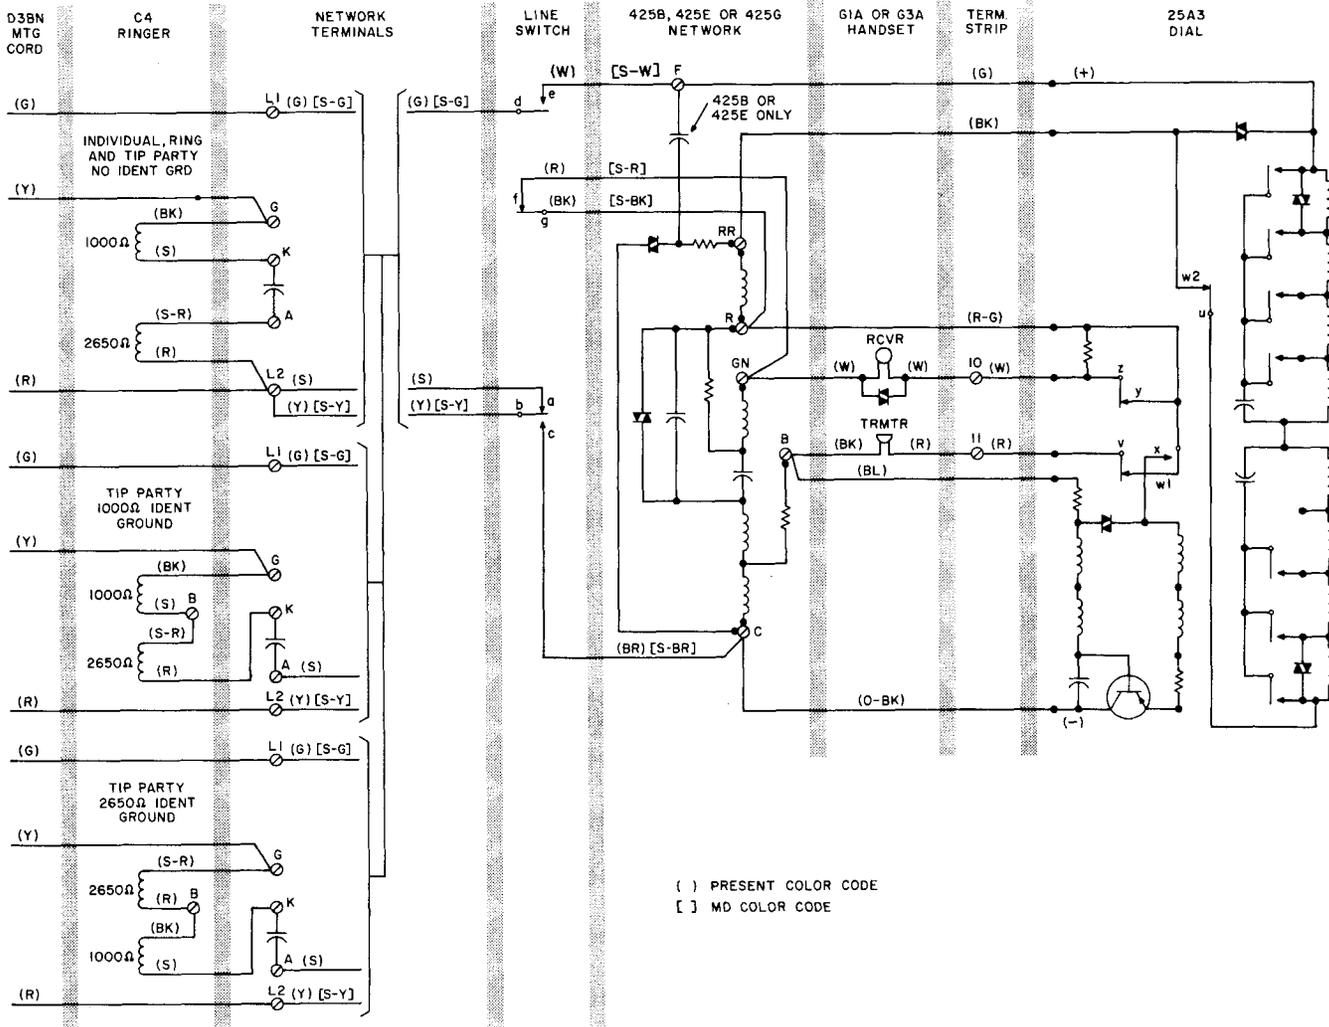


Fig. 1 — 1500D Telephone Set Connections, With 25A3 Dial

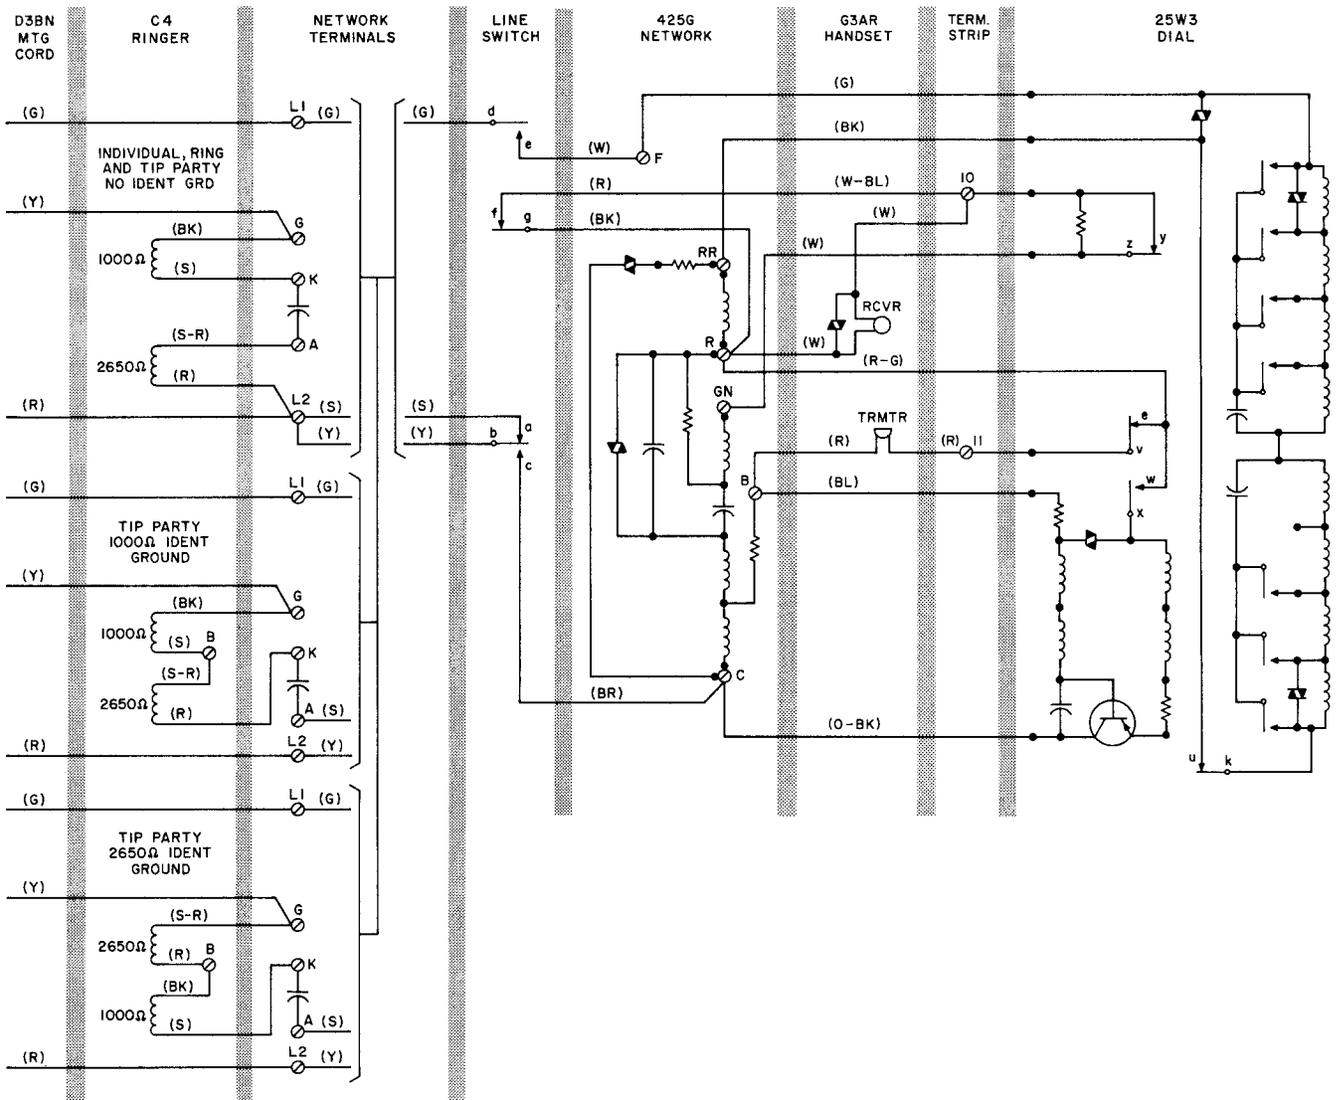


Fig. 2 — 1500D Telephone Set Connections, With 25W3 Dial