

TELEPHONE SETS — 1500S

CONNECTIONS


I. GENERAL

1.01 This section covers connections for the 1500S telephone set.

1.02 It is reissued to show color changes on switchhook.

TABLE A
LINE AND RINGER CONNECTIONS
(Changes Made in Telephone Set for Party Line Service)

| Lead | | | | Bridged | Ring Party | Tip Party | Tip Party With Ident Grd | |
|---------------------------------|----------------------|---------|-------|---------|------------|-----------|--------------------------|-----------|
| | | | | | | | 1000 ohms | 2650 ohms |
| Mtg Cord Connections at Tel Set | Line | Tip | G | 8 | 8 | 7 | 7 | 7 |
| | | Ring | R | 7 | 7 | 8 | 8 | 8 |
| | Speakerphone Control | A or G1 | BR-Y | 4 | 4 | 4 | B | B |
| | | A1 Grd | Y | 3 | 3 | 3 | 3 | 3 |
| | | AG | BR-R | 4 | 4 | 4 | 4 | 4 |
| | | R1 | BR-G | 7 | 7 | 8 | 8 | 8 |
| | | T1 | BK | 5 | 5 | 5 | 5 | 5 |
| | | IR | BR-BK | 6 | 6 | 6 | 6 | 6 |
| | | IT | W | 9 | 9 | 9 | 9 | 9 |
| | | LK | BL | 2 | 2 | 2 | 2 | 2 |
| Ringer Connections | | BK | | 8 | 3 | 3 | 3 | B |
| | | S | | K | K | K | B | K |
| | | S-R | | A | A | A | B | 3 |
| | | R | | 7 | 1 | 1 | K | B |
| Dial Lead | | G | | 8 | 8 | G | G | G |
| Switchhook Leads | | S | | C | C | G | G | G |
| | | S-Y | | 7 | 7 | 7 | 7 | 7 |
| | | S-BR | | 1 | 1 | 1 | A | A |
| Strap | | | | | | 8 to C | 8 to C | |

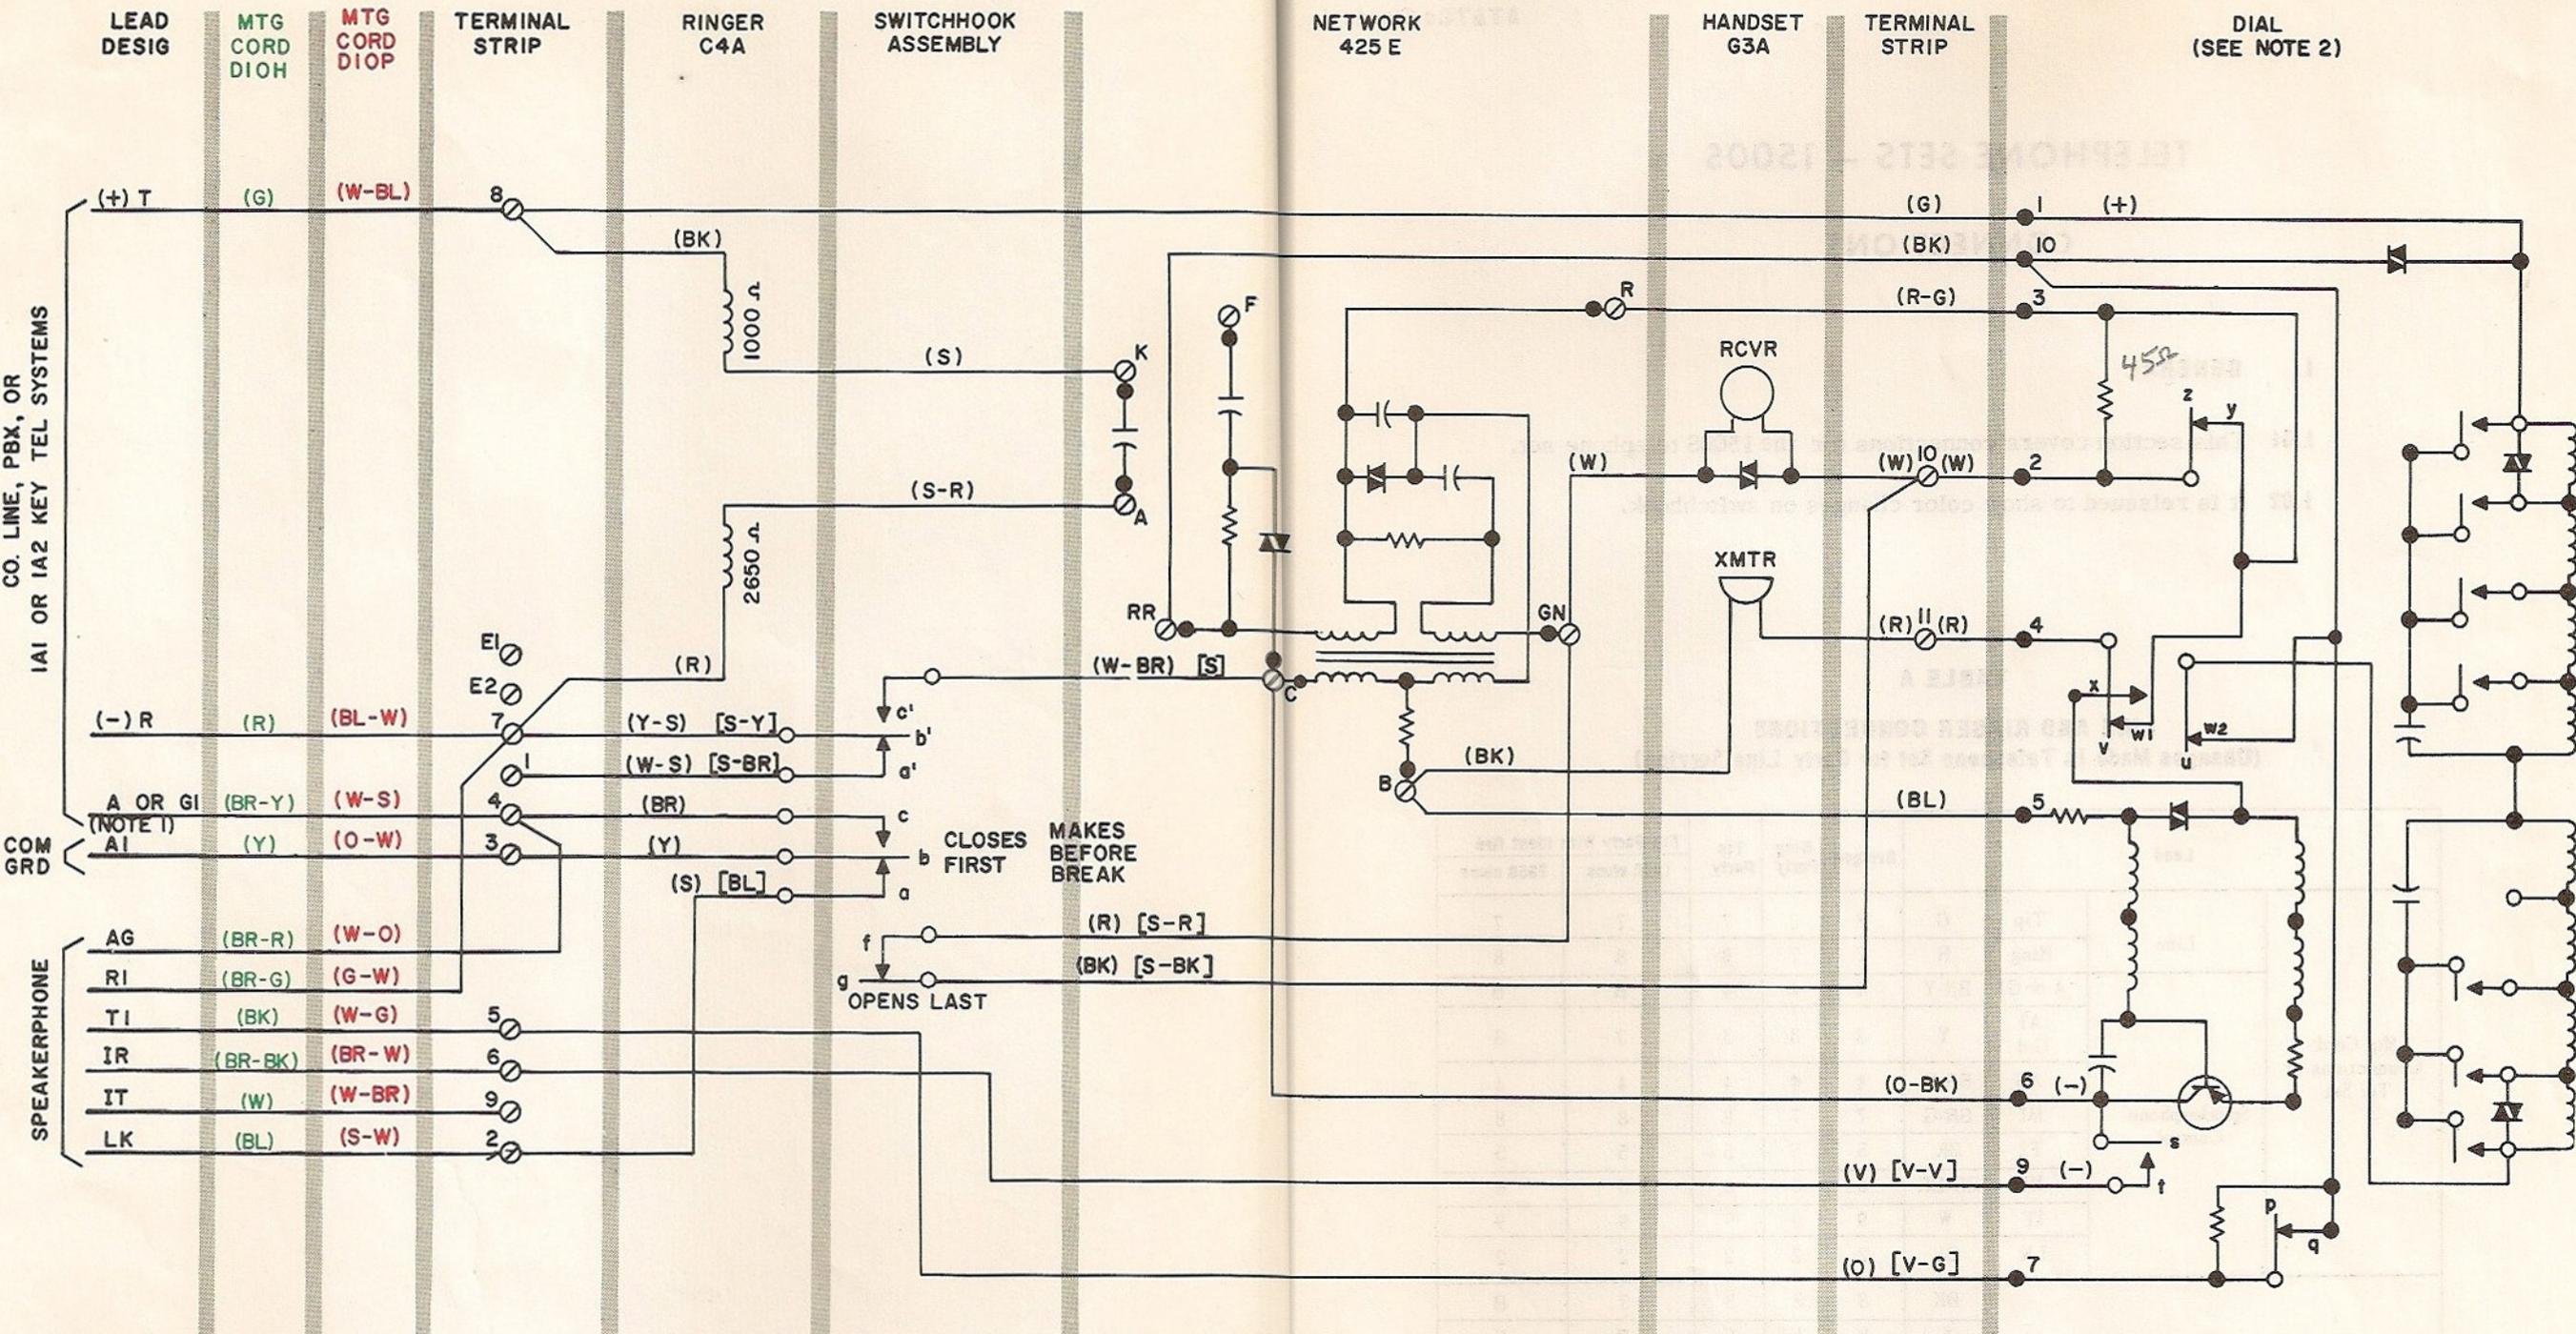

NOTE 1: FOR TIP PARTY IDENTIFICATION (SPEAKERPHONE), TRANSFER (BR-Y)(W-S) LEAD FROM TERMINAL 4 TO TERMINAL B OF NETWORK.

NOTE 2: THE 1500S TELEPHONE SET IS EQUIPPED WITH A 25B3 DIAL.

RED INDICATES EVEN COUNT COLOR CODE
 GREEN INDICATES MD COLOR CODE
 () INDICATES CURRENT COLOR CODE
 [] INDICATES MD COLOR CODE

Fig. 1 - 1500S Telephone Set, Wired for Speakerphone