

SERVICE

554A/B, 554F, 554AM, 554BM, 554AMP, AND 554BMP TELEPHONE SETS

1. GENERAL

1.01 Reissued to add 554AM and 554AMP (modular) telephone sets, Fig. 2 and 4.

TABLE A
LINE AND RINGER CONNECTIONS


WIRE OR LEAD	COLOR	INDIVIDUAL OR BRIDGED	RINGER PARTY	TIP PARTY NO IDENT GROUND	TIP PARTY IDENT GROUND			
					NORMAL CONNECTIONS		TO SILENCE RINGER PERMANENTLY	
					1000Ω	2650Ω	1000Ω	2650Ω
Ringer Leads	R	L2	L2	L2	K	B	K	B
	BK	L1	G	G	G	B	G	K
	S	K	K	K	B	K	B	K
	S-R	A	A	A	B	G	K	G
Line Switch	S	L2	L2	L2	A	A	L2	L2
Line Wire or 523A3 Plug in Set	Ring	R	L2	L2	L1	L1	L1	L1
	Tip	G	L1	L1	L2	L2	L2	L2
	Grd	Y	G	G	G	G	G	G
	—	BK	*	*	*	*	*	*

To silence ringer for all classes of service except tip party ground identification, connect R and BK ringer leads on K terminal of 425E network.

* Insulate and store (line wire only).


NOTICE

Not for use or disclosure outside the Bell System except under written agreement

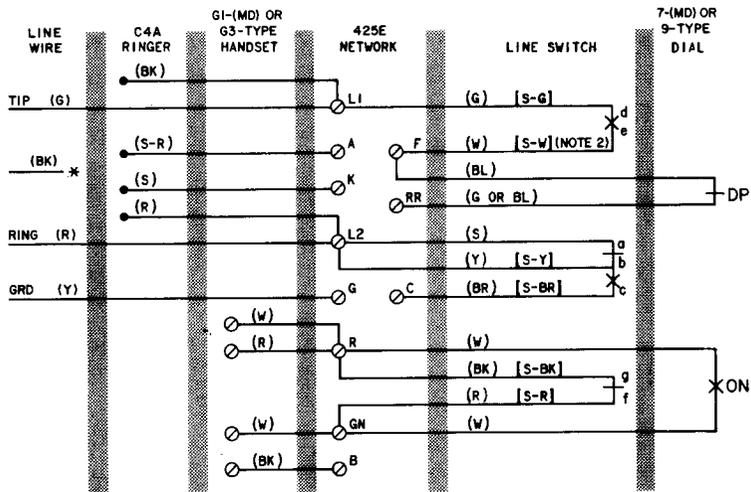

- NOTES:
1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
 2. MOVE (W) [S-W] LEAD FROM F TO RR FOR MANUAL SERVICE.
- () CURRENT COLOR CODE
 [] MD COLOR CODE
 DP DIAL PULSE
 ON OFF NORMAL
 LINE SWITCH SEQUENCE:
 bc-MAKE, de-MAKE
 ab-BREAK, fg-BREAK
 * INSULATED AND STORED

Fig. 1—554A/B and F Telephone Sets, Connections

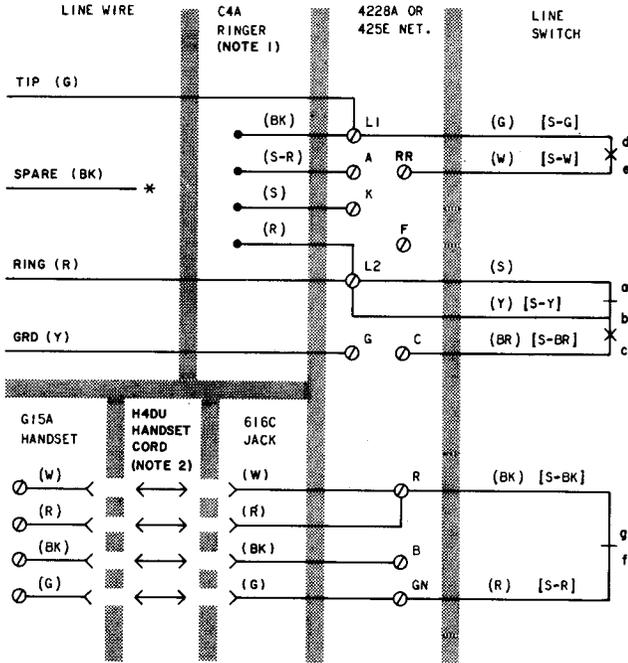


NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
 2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.
- * INSULATED AND STORED

- () CURRENT COLOR CODE
- [] MD COLOR CODE
- DP - DIAL PULSE
- DN - DIAL OFF-NORMAL
- LINE SWITCH OFF-HOOK
- SEQUENCE:
- bc - MAKE
- de - MAKE
- ab - BREAK
- fg - BREAK

Fig. 2—554AM Telephone Set, Connections

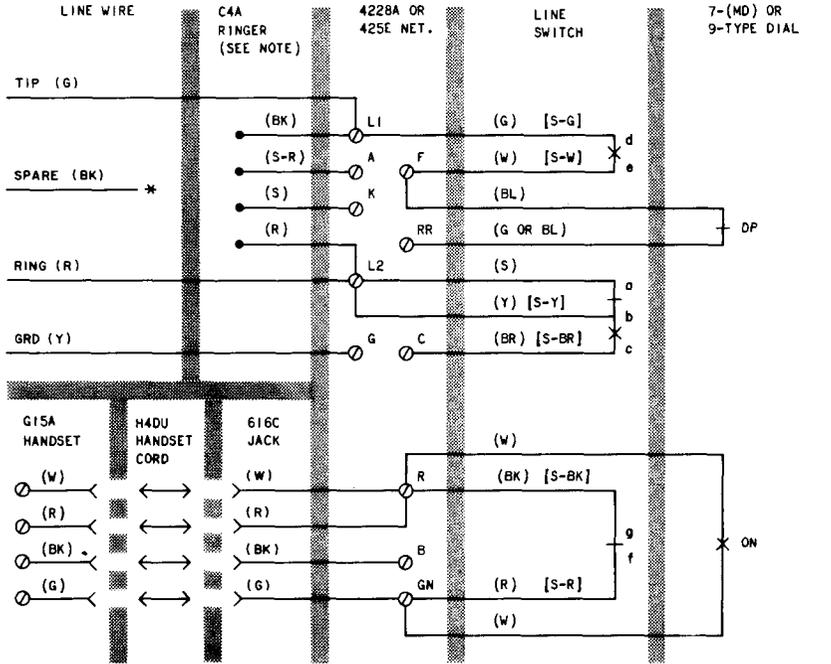


NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.

() CURRENT COLOR CODE
 [] MD COLOR CODE
 DP - DIAL PULSE
 ON - DIAL OFF-NORMAL
 LINE SWITCH OFF-HOOK
 SEQUENCE:
 bc - MAKE
 de - MAKE
 ab - BREAK
 fg - BREAK

Fig. 3—554BM Telephone Set, Connections

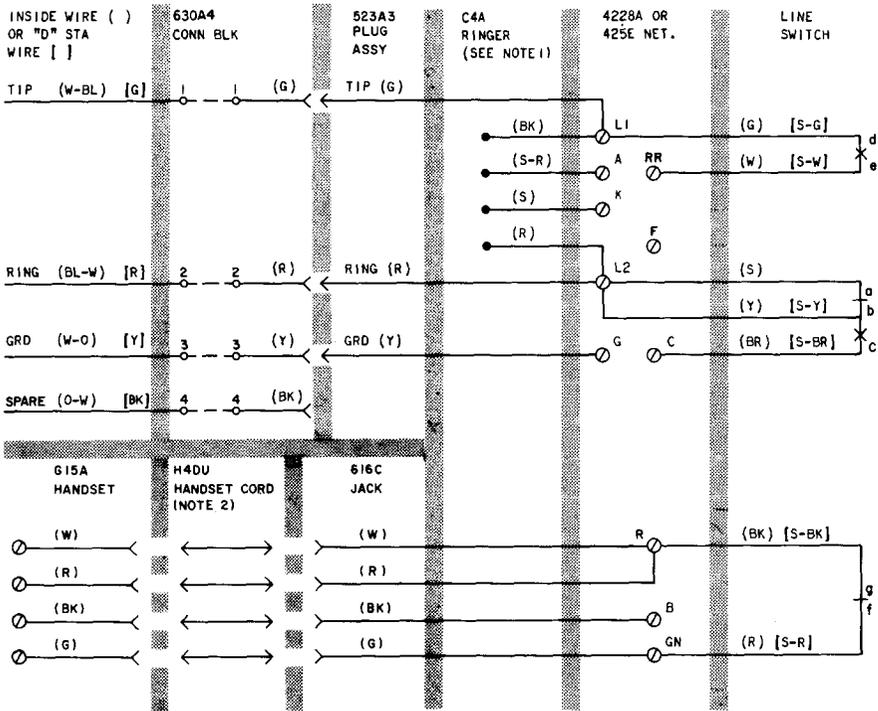


NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.

- () CURRENT COLOR CODE
- [] MD COLOR CODE
- DP - DIAL PULSE
- ON - DIAL OFF-NORMAL
- LINE SWITCH OFF-HOOK SEQUENCE:
- bc - MAKE
- de - MAKE
- ab - BREAK
- fg - BREAK

Fig. 4—554AMP Telephone Set, Connections

SECTION 502-521-410

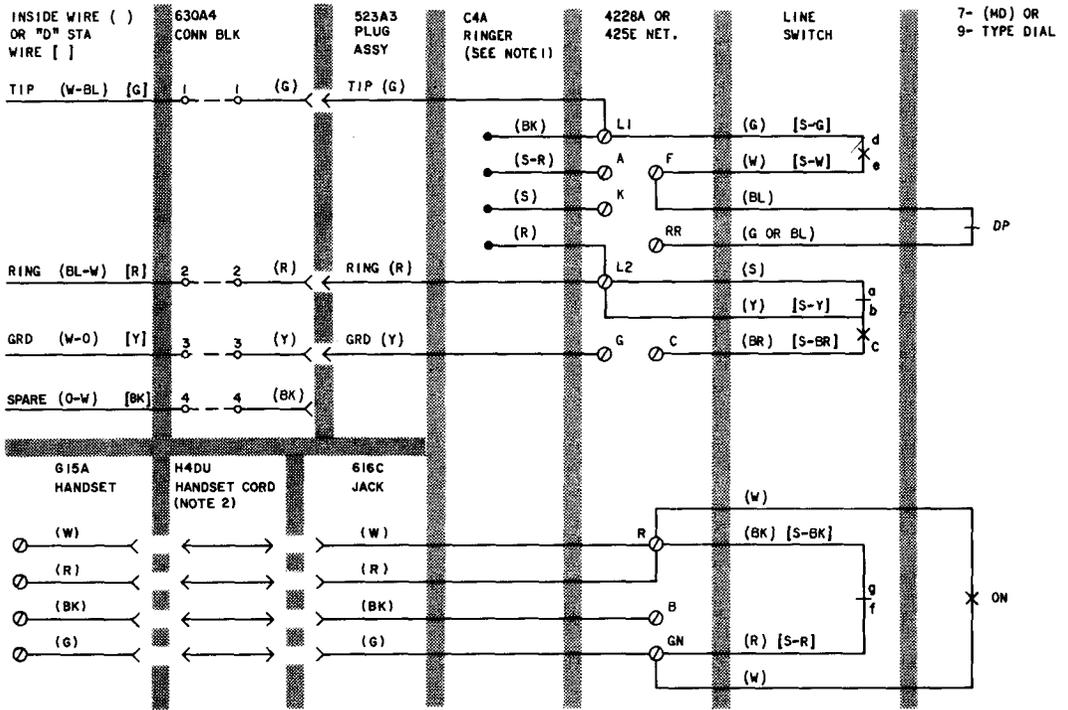

NOTES:

1. WIRED FOR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
2. H4DU HANDSET CORD MUST BE ORDERED SEPARATELY.

- () CURRENT COLOR CODE
- [] MD COLOR CODE
- DP - DIAL PULSE
- ON - DIAL OFF-NORMAL
- LINE SWITCH OFF-HOOK SEQUENCE:
- bc - MAKE
- de - MAKE
- ab - BREAK
- fg - BREAK

Fig. 5—554BMP Telephone Set, Connections