

SERVICE

556A/B, 556AM/BM, AND 556AMP/BMP TELEPHONE SETS

1. GENERAL

1.01 Reissued to add 556AM/BM and 556AMP/BMP (modular) telephone sets.

TABLE A
TELEPHONE SET — LINE, RINGER,
AND TUBE CONNECTIONS (NOTES 2 AND 4)


WIRE OR LEAD		COLOR	(-) NEGATIVE RING	(+) POSITIVE RING
Ringer Leads (Note 1)		R	G	L2
		BK	G	L2
		S	A	A
		S-R	K	K
426A Tube (3 Element) See Note 3		R	L1 or G	L2
		BK	K	K
		Y	L2	G
Line Wire in Set	Ring	R	L2	L1
	Tip	G	L1	L2
	Grd	Y	G	G

Notes 1: To permanently silence ringer, connect R and BK ringer leads to K terminal of network

- 2: Reverse tip and ring for tip party service.
- 3: Stations without ANI, (R) tube lead may be connected to G if ringer operation is marginal. At negative stations on 96 volt long line circuits, (R) lead should be connected to G.
- 4: For information concerning inductive interference, refer to section on inductive noise.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

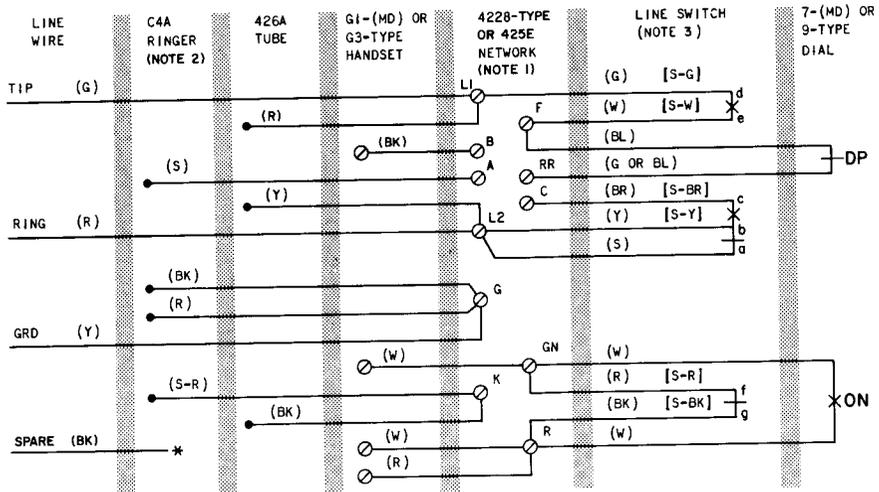


NOTES:

1. FOR MANUAL SERVICE, MOVE (w) [S-W] LEAD FROM F TO RR TERMINAL.
2. WIRED FOR (-) RING PARTY, REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
3. LINE SWITCH OFF-HOOK SEQUENCE:
 bc - MAKE ab - BREAK
 de - MAKE fg - BREAK

- * INSULATED AND STORED
- () CURRENT COLOR CODE
- [] MD COLOR CODE
- DP DIAL PULSE
- ON OFF NORMAL

Fig. 1—556A/B Telephone Set, Connections

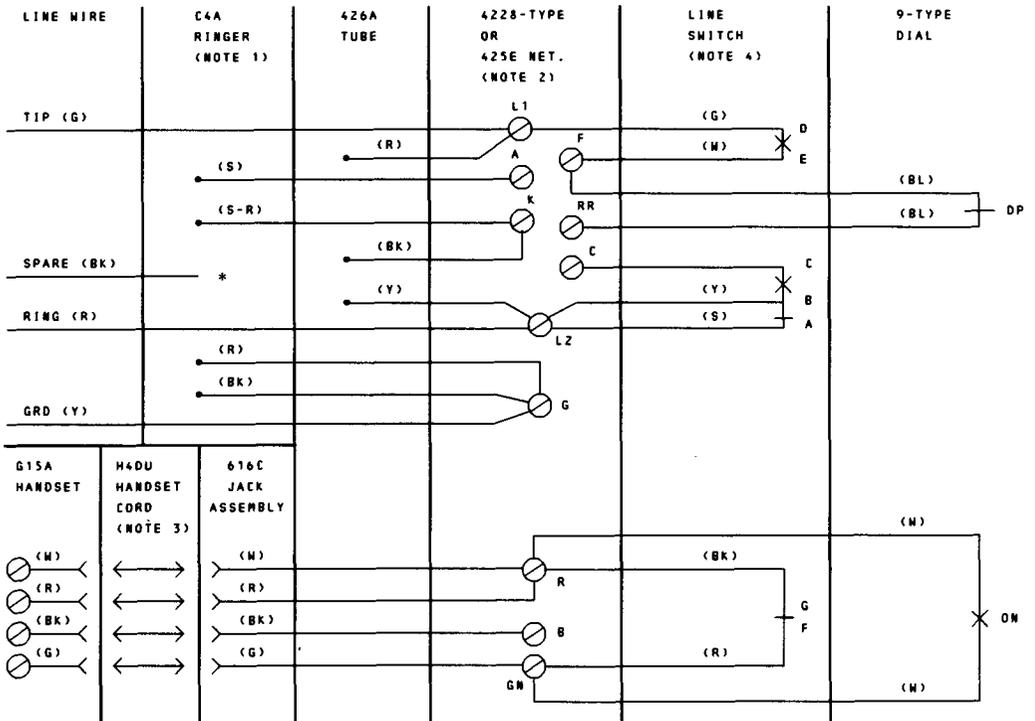

NOTES:


1. WIRED FOR (-) RING PARTY. REFER TO TABLE A FOR OTHER CLASSES OF SERVICE.
2. FOR MANUAL SERVICE, MOVE (W) LEAD FROM TERMINAL F TO RR OF NETWORK.
3. H4DU CORD ORDERED SEPARATELY.
4. LINE SWITCH OFF-HOOK SEQUENCE:
 BC - MAKES
 DE - MAKES
 AB - BREAKS
 FG - BREAKS

* INSULATED AND STORED

DP - DIAL PULSE

ON - DIAL OFF-NORMAL

Fig. 2—AM/BM Telephone Set, Connections

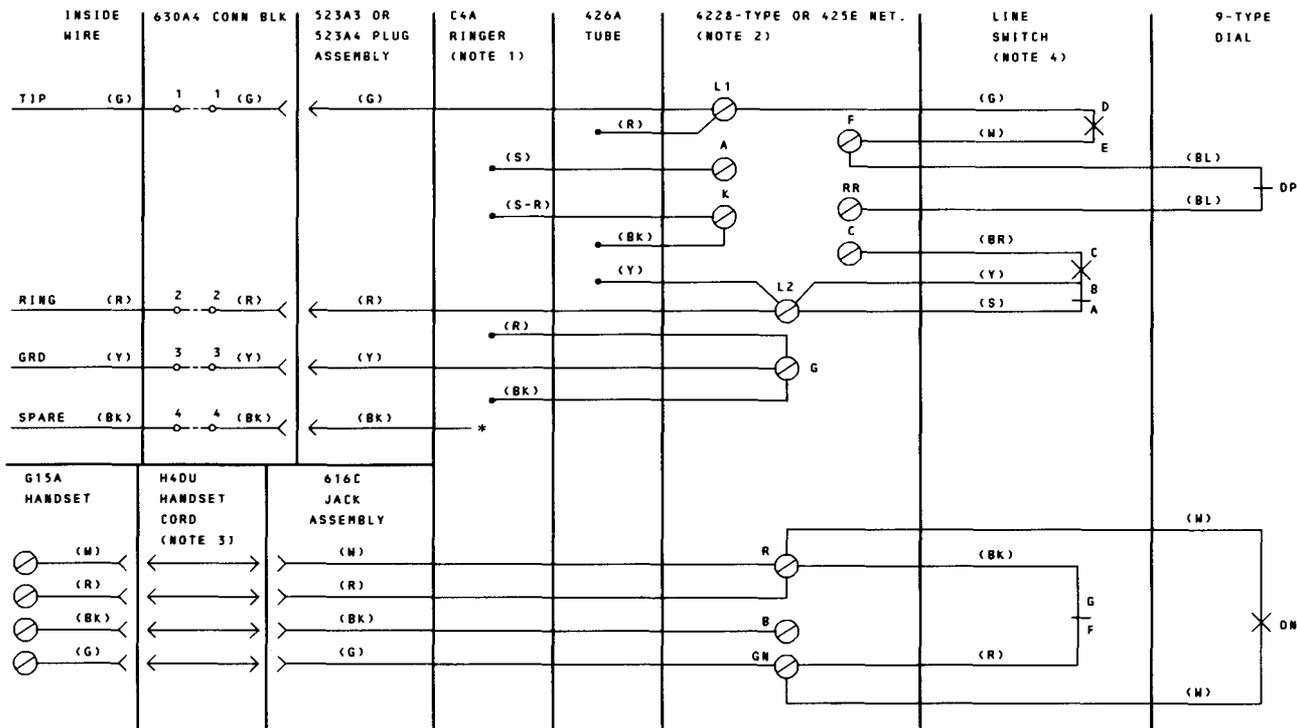

NOTES:

1. WIRED FOR (-) RING PARTY. REFER TO TABLE A FOR OTHER CLASSES OF SERVICE.
2. FOR MANUAL SERVICE, MOVE (M) LEAD FROM TERMINAL F TO RR OF NETWORK.
3. H4DU CORD ORDERED SEPARATELY.
4. LINE SWITCH OFF-HOOK SEQUENCE:
 BC - MAKES
 DE - MAKES
 AB - BREAKS
 FG - BREAKS

* INSULATED AND STORED

DP - DIAL PULSE
 DM - DIAL OFF-NORMAL

Fig. 3—556AMP/BMP Telephone Set, Connections