


SERVICE

502A/B AND 502BM TELEPHONE SETS

1. GENERAL

1.01 Reissued to add 502BM (modular) telephone set.

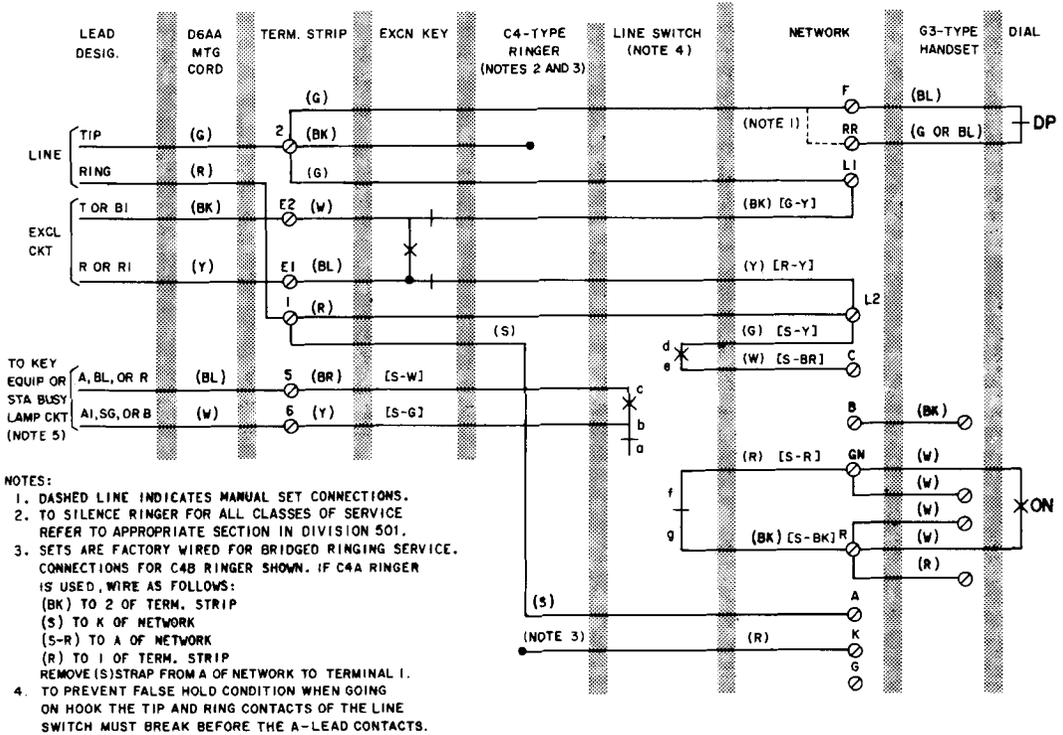

- NOTES:
1. DASHED LINE INDICATES MANUAL SET CONNECTIONS.
 2. TO SILENCE RINGER FOR ALL CLASSES OF SERVICE REFER TO APPROPRIATE SECTION IN DIVISION 501.
 3. SETS ARE FACTORY WIRED FOR BRIDGED RINGING SERVICE. CONNECTIONS FOR C4B RINGER SHOWN. IF C4A RINGER IS USED, WIRE AS FOLLOWS:
(BK) TO 2 OF TERM. STRIP
(S) TO K OF NETWORK
(S-R) TO A OF NETWORK
(R) TO 1 OF TERM. STRIP
REMOVE (S) STRAP FROM A OF NETWORK TO TERMINAL 1.
 4. TO PREVENT FALSE HOLD CONDITION WHEN GOING ON HOOK THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE THE A-LEAD CONTACTS.

DP - DIAL PULSE CONTACTS
ON - DIAL OFF-NORMAL CONTACTS
() - CURRENT COLOR CODE
[] - MD COLOR CODE

Fig. 1—502A/B Telephone Set, Connections

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

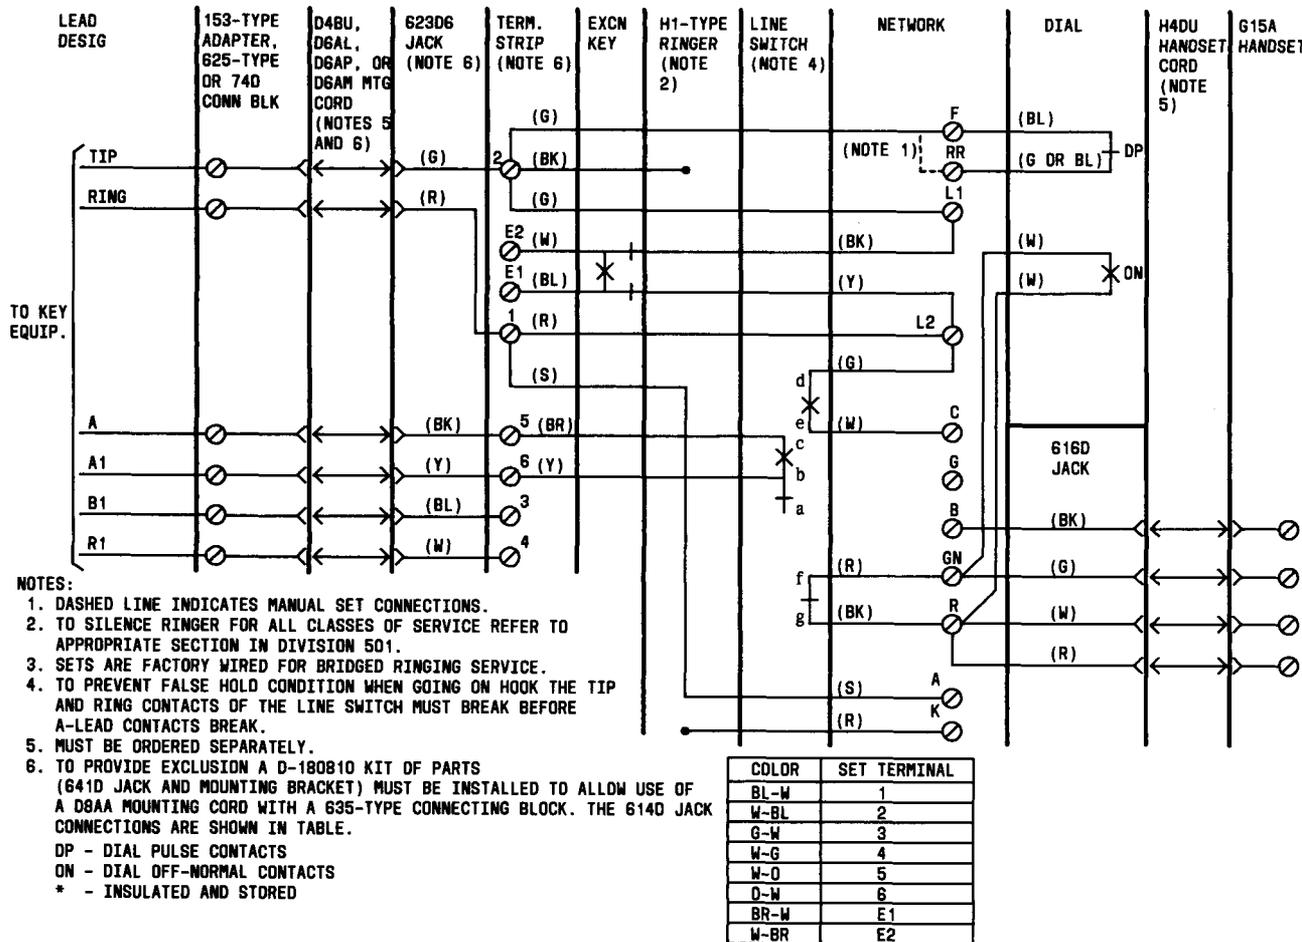


Fig. 2—502BM Telephone Set, Connections