

SERVICE

535A AND B TELEPHONE SETS

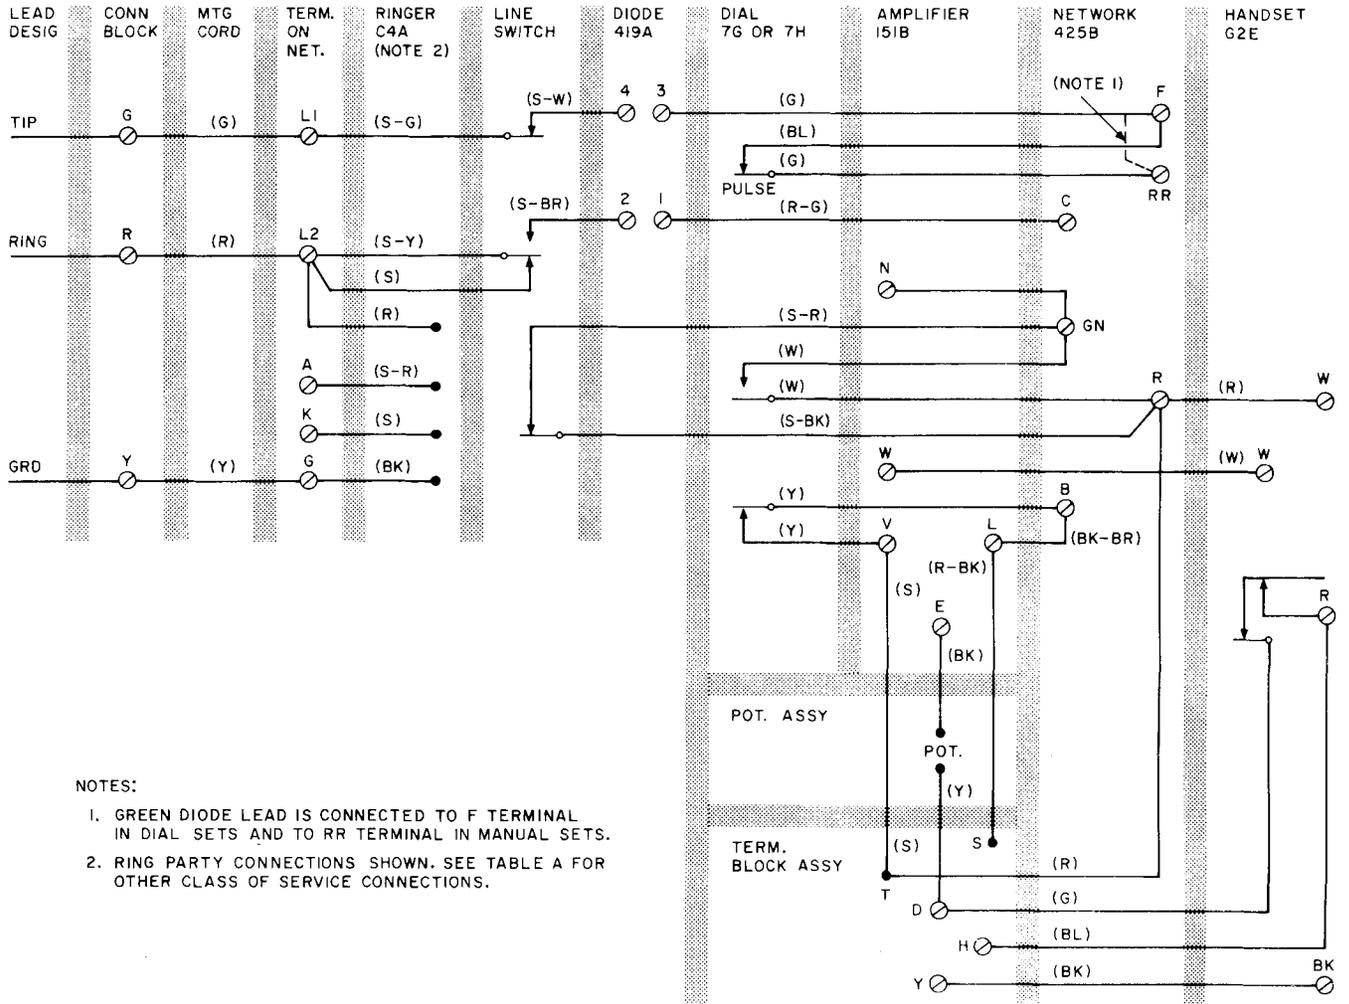


Fig. 1—535A and B (MD) Telephone Set, Connections

TABLE A
LINE AND RINGER CONNECTIONS
535A, B (MD) TELEPHONE SETS

WIRE OR LEAD		INDIV OR BRIDGED	RING PARTY*	TIP PARTY IDENT	
				NORMAL CONNECTIONS	
				1000Ω	2650Ω
Ringer Leads (Note)	(R)	L2	L2	K	B
	(BK)	L1	G	G	B
	(S)	K	K	B	K
	(S-R)	A	A	B	G
Line Switch	(S)	L2	L2	A	A
Mtg Cord	Ring (R)	L2	L2	L1	L1
	Tip (G)	L1	L1	L2	L2
	Grd (Y)	G	G	G	G

* Reverse tip and ring for tip party service.

Note: To silence ringer for all classes of service except tip party identification, connect S and BK ringer leads on K terminal of network. To silence ringer for tip party identification disconnect the R and S-R ringer leads for 1000Ω and BK ringer lead for 2650Ω and insulate and store.