

SERVICE

2514B AND 2514BM TELEPHONE SETS

1. GENERAL

TABLE A

1.01 Reissued to:

- Show 2514B telephone set MD
- Add modular cord and jack information, Fig. 2

POLARITY GUARD CONNECTIONS
[819040528 (P-90D052) GUARD ASSEMBLY]

WIRE OR LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	POLARITY GUARD
Dial	BK	RR		T
Line Switch	W	C		S
Headset and Flash Key	S-R	C		S
Polarity Guard	G W		RR C	

Note: For use when specified by local instructions for end-to-end signaling installations.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement


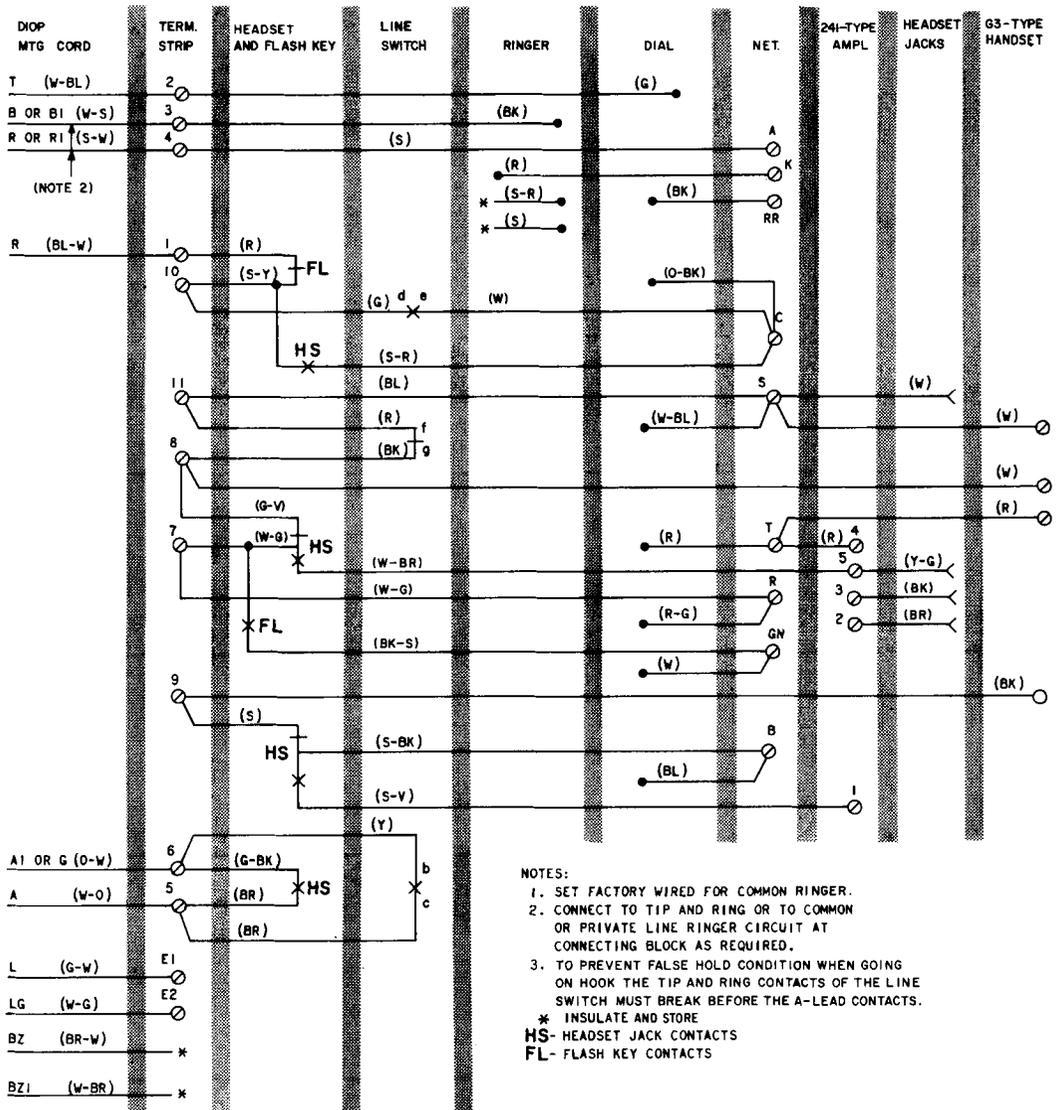


Fig. 1—2514B (MD) Telephone Set, Connections

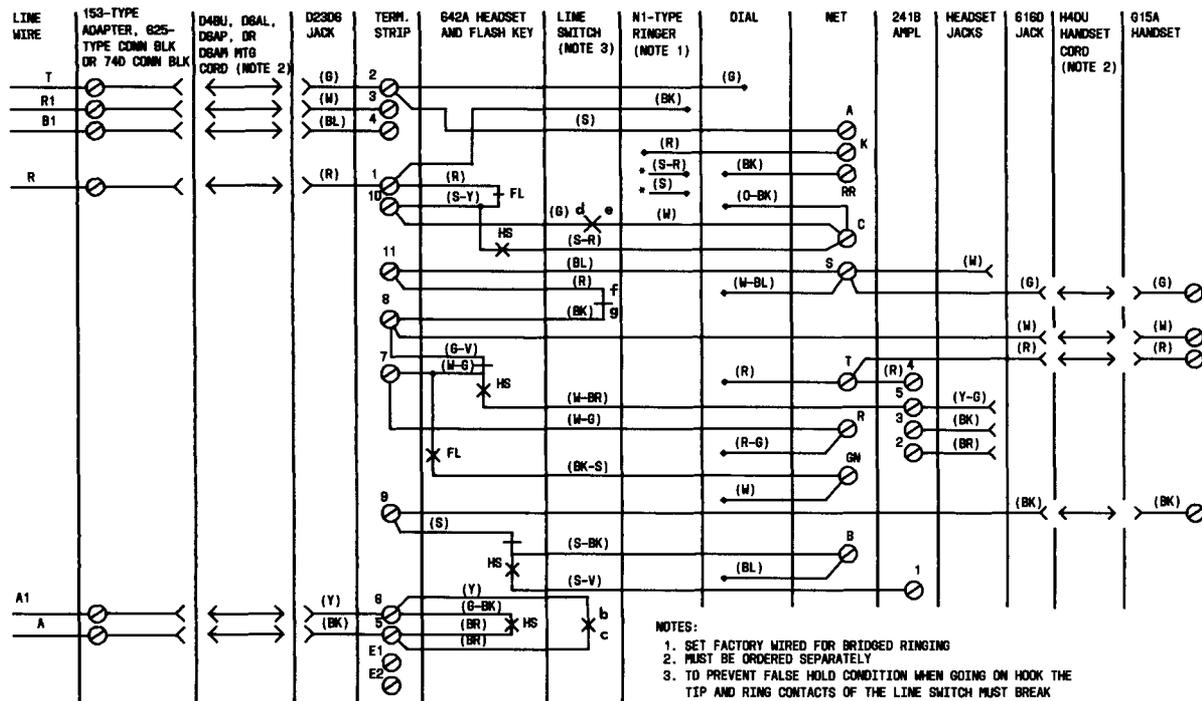

- NOTES:
1. SET FACTORY WIRED FOR BRIDGED RINGING
 2. MUST BE ORDERED SEPARATELY
 3. TO PREVENT FALSE HOLD CONDITION WHEN GOING ON HOOK THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE THE A-LEAD CONTACTS.

* INSULATE AND STORE
 HS - HEADSET JACK CONTACTS
 FL - FLASH KEY CONTACTS

Fig. 2—2514BM Telephone Set, Connections