

## REFERENCE

### 609-, 617-, AND 625-TYPE TELEPHONE SETS

### IDENTIFICATION

#### 1. GENERAL

**1.01** This section contains information on the 609A1, 609B1, 617A15, 617B13, 617B14, 617B15, 617B20, 617B21, and 625A1 telephone sets which are special application CALL DIRECTOR® sets (Table A).

**1.02** The section is reissued to show the 609- and 617-type CALL DIRECTOR telephone sets MD and to add comcode numbers.

#### 2. IDENTIFICATION

**2.01** The 609-type (MD) telephone set (Fig. 1 and 2) is used at a supervisors desk with a dial TWX or a No. 64 teletypewriter switchboard. The set color is green (-51) only.

**2.02** The 617-type (MD) telephone set (Fig. 3 through 7) is used for 2- or 4-wire operation at Federal Aviation Agency (FAA) installations. The set color is light gray (-61) and provided in 30-button size only.

**2.03** The 625-type telephone set (Fig. 8, 9, and 10) is an 18-button set used exclusively with the 110A key telephone equipment. The set color is green (-51) only.

**2.04** The 42A1 faceplate assembly is used with the 617-type telephone set (Fig. 11). The 20M1 faceplate assembly is used with the 625-type telephone set (Fig. 12).

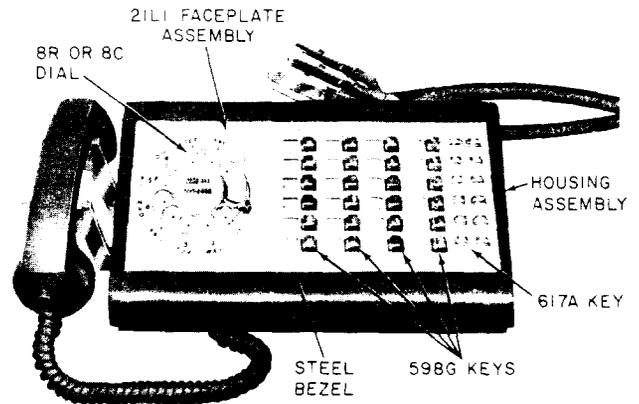


Fig. 1—609-Type (MD) Telephone Set

#### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

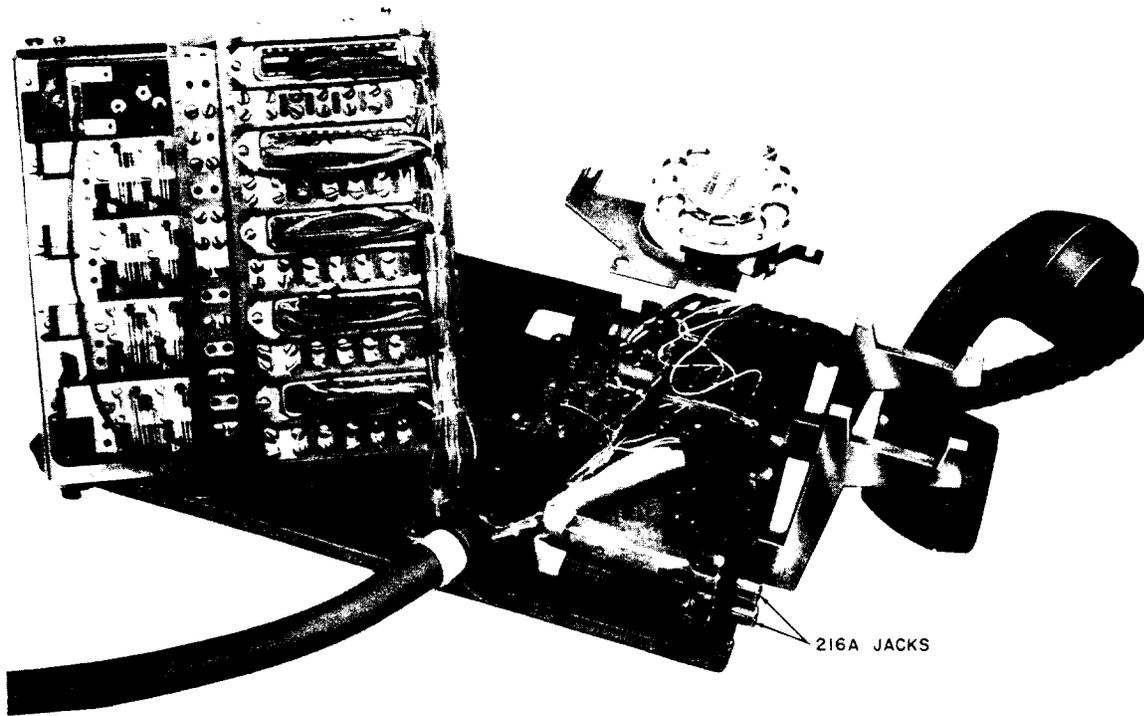


Fig. 2—609A1 (MD) Telephone Set Housing Removed, Key Frame and Dial Lifted

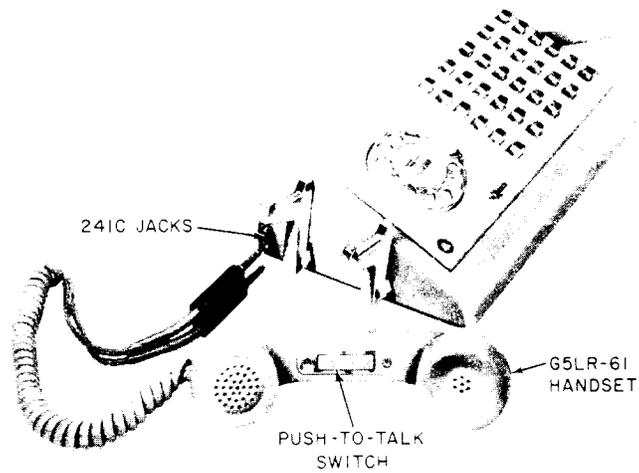


Fig. 3—617A15 (MD) or 617B15 (MD) Telephone Set

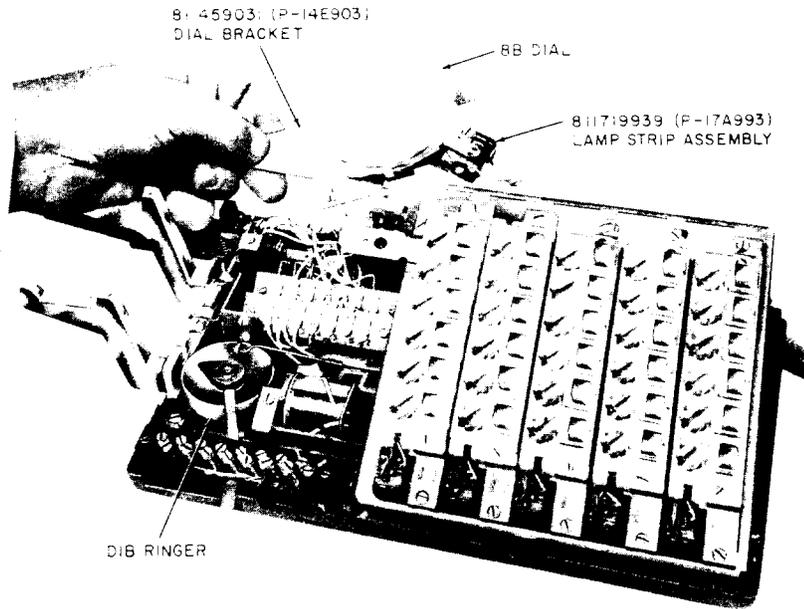


Fig. 4—617A15 (MD) Telephone Set, Interior View

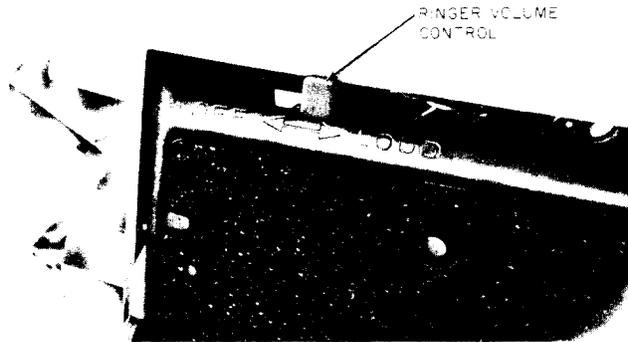


Fig. 5—Volume Control Arm of D1B Ringer on 617A15 (MD) Telephone Set

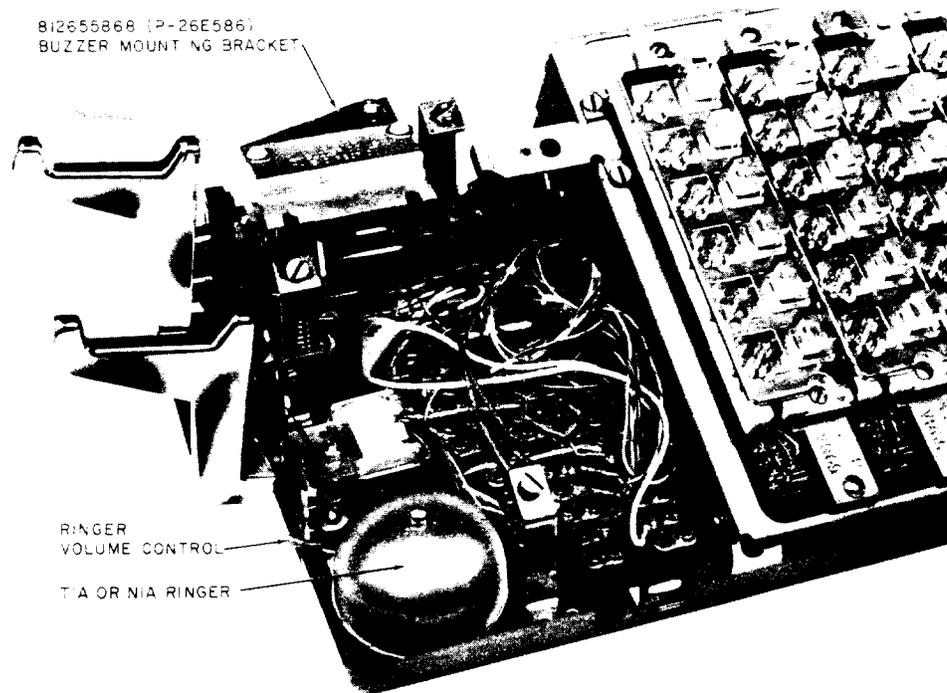


Fig. 6—617B15 (MD) Telephone Set, Interior View

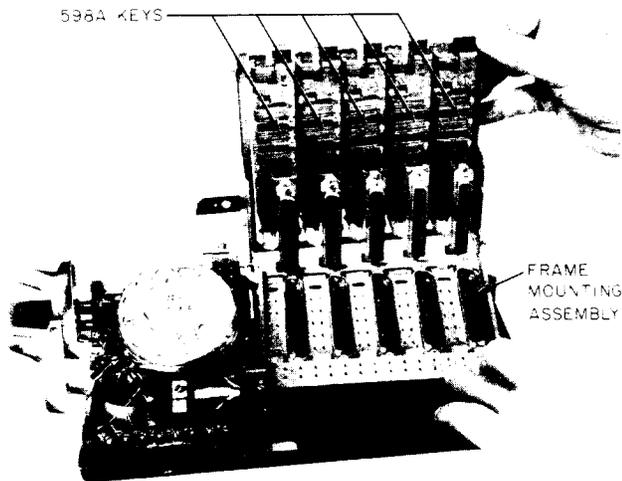


Fig. 7—598A Keys and Frame Mounting Assembly of 617-type (MD) Telephone Set

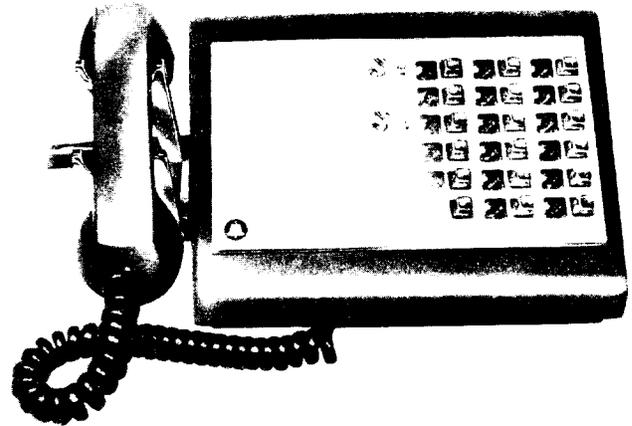


Fig. 8—625A1 (MD) Telephone Set

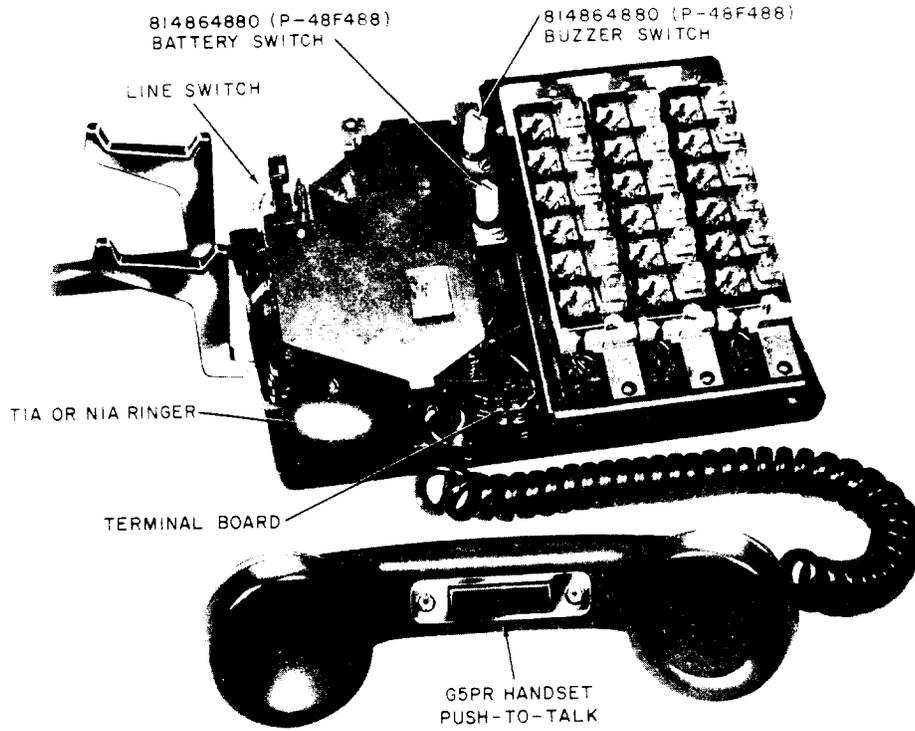


Fig. 9—625A1 (MD) Telephone Set, Interior View

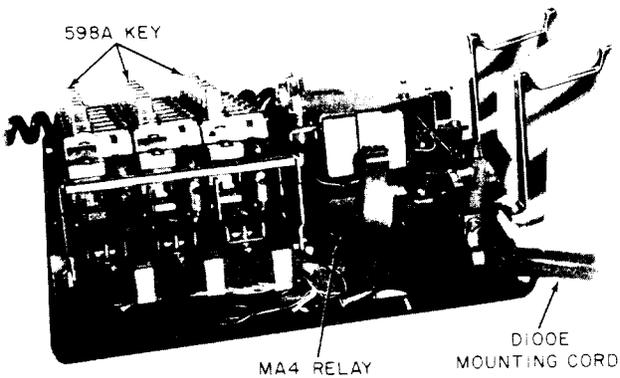


Fig. 10—625A1 (MD) Telephone Set, Rear View

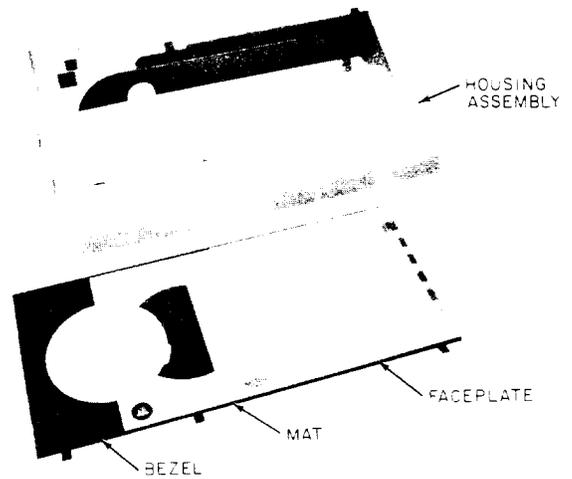


Fig. 11—Housing, Faceplate, Bezel, and Mat of  
617-Type (MD) Telephone Set

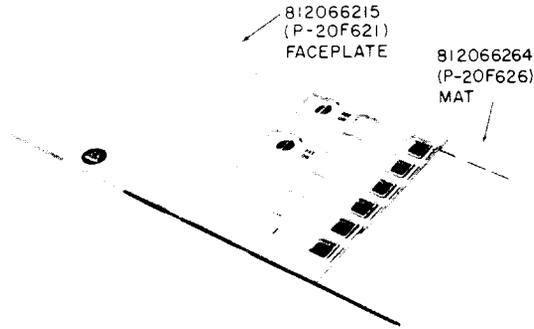


Fig. 12—20M1 Faceplate Assembly of 625-Type Telephone Set

◆ TABLE A ◆

PRINCIPAL COMPONENT PARTS

TEL SET	DIAL	MTG CORD	HAND-SET	HEAD-SET	RINGER	FACEPLATE ASSY (NOTE)	BEZEL ASSY	KEYS	JACKS
609A	8R-58, 8RA-58 or 8C-58, 8CA-58	D150D -87	G3AR-51 or G3A6-51	52- or 53-type	—	21L1-71	812652121 (P-26E212)	598G or 656G and 617A	216A
609B									
617A	8B or 8BA	D150K -87	G5LR-61 or G5L6-61	52GR*	D1B	42A1-70	812652121 (P-26E212)	598A or 656A	241C
617B					T1A or N1A				
625A1	—	D100E -87	G5PR-51	—	T1A or N1A	20M1-71	814455085	598A or 656A	—

Note: Refer to Table B for ordering faceplates and mats only.

\* Order separately.

◆ TABLE B ◆

## FACEPLATES AND MATS

TEL SET	FACEPLATE ASSEMBLY	FACEPLATE ONLY	MATS ONLY
609-type	21L1-71	812066108 (P-20F610)	818866717 (P-88F671) — Lt. Green
			818866782 (P-88F678) — Silver
			818866790 (P-88F679) — Gold
617-type	42A1-70	812066207 (P-20F620)	818867707 (P-88F770) — Charcoal
			818867780 (P-88F778) — Silver
			818867798 (P-88F779) — Gold
625A1	20M1-71	812066215 (P-20F621)	812066264 (P-20F626) — Lt. Green