

TELEPHONE SETS – 711B CONNECTIONS

1. GENERAL

1.01 This section is reissued to remove connections for 1A home interphone, 2A farm interphone, and 3-type speakerphone systems which can be found in appropriate sections in Division 512. Since this reissue covers a general revision, arrows ordinarily used to indicate changes have been omitted.

1.02 A ringer is not provided as part of the 711B telephone set. If a ringer is desired, see section covering E-type ringers and connect as required for type of service being provided.

1.03 The 711B telephone set is not recommended for use in the following service:

- Automatic Number Identification (ANI)
- Tip party identification

- Inductive noise cancellation using cold cathode electron tubes.

2. CONNECTION INDEX

Table A — Modification for 1-Line Pickup, Cutoff Feature for Extension Station or External Line Ringer

Fig. 1 — 711B Telephone Set — Wired for 2-Line Pickup, Exclusion on Line 1, and Signaling (Used Without 1A1 or 1A2 KTS)

Fig. 2 — 711B Telephone Set — Wired for 1-Line Pickup, Cutoff Feature for Extension Station or External Line Ringer

TABLE A

**MODIFICATION FOR 1-LINE PICKUP, CUTOFF FEATURE
 FOR EXTENSION STATION OR EXTERNAL LINE RINGER**

WIRE OR LEAD	COLOR	REMOVE FROM	CONNECT TO		INSULATE AND STORE
		TERM. STRIP	TERM. STRIP	NET.	
Line Key	(G)	2			●
	(R)	1			●
Exclusion Switch	(G-Y)	2			●
	(R-Y)	1			●
M1W Cord or Strap Wire			2 ← → F		
			1 ← → L2		

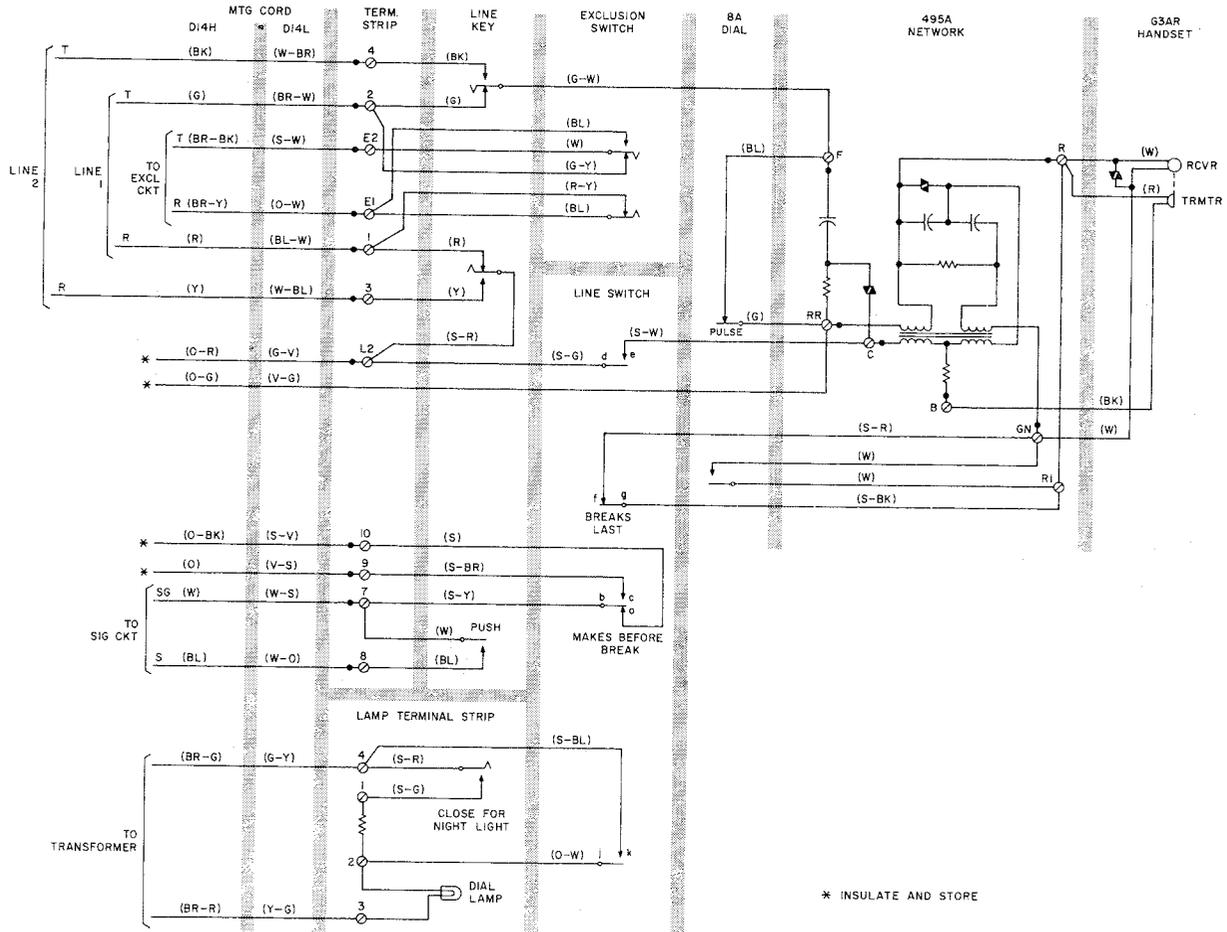


Fig. 1—711B Telephone Set—Wired for 2-Line Pickup, Exclusion on Line 1, and Signaling (Used Without 1A1 or 1A2 KTS)

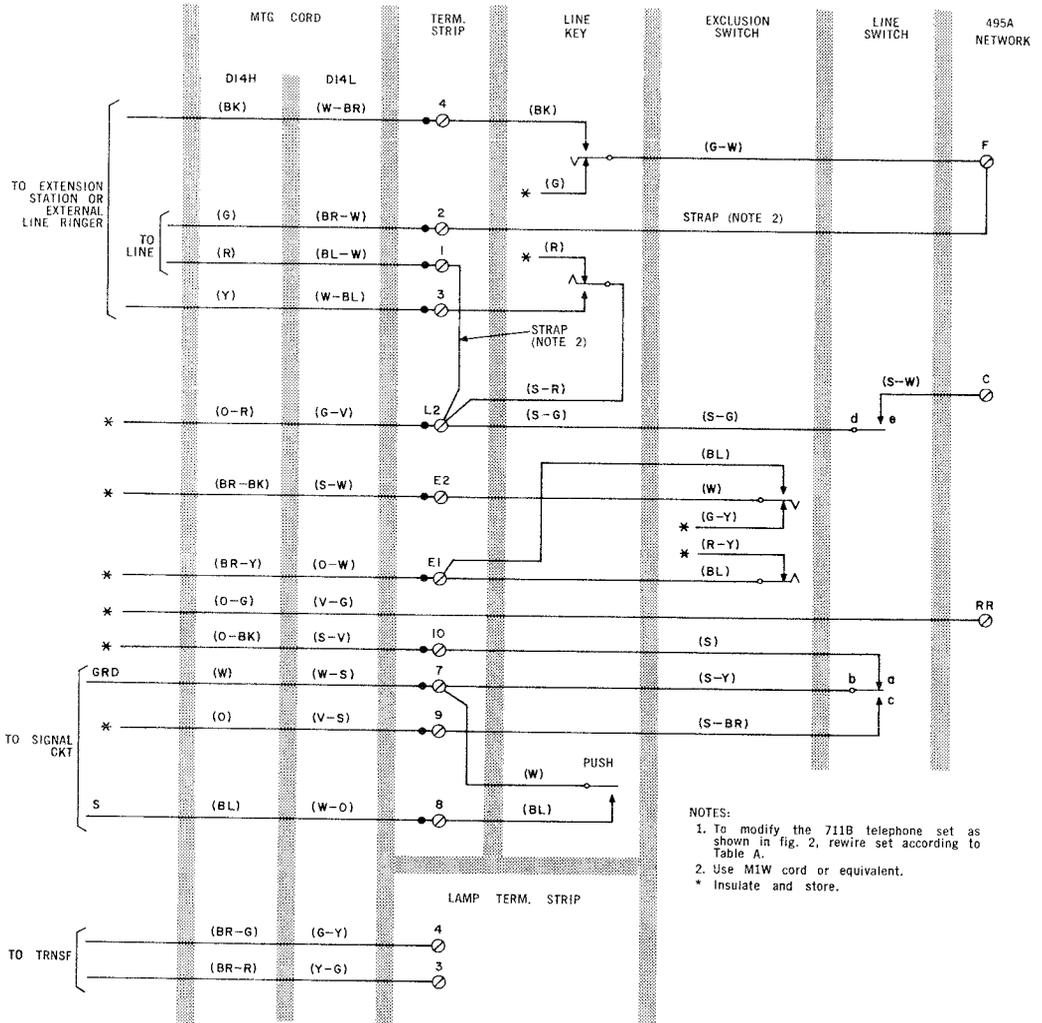


Fig. 2 — 711B Telephone Set — Wired for 1-Line Pickup, Cutoff Feature for Extension Station or External Line Ringer