


TABLE A
POLARITY GUARD CONNECTIONS
(D-180229 Kit of Parts)

WIRE OR LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM. BLOCK*
Line Switch	(BR)	C		4
Dial	(BK)	RR		3
D-180229 Polarity Guard	(R)			3
	(BK)			4
	(G)		RR	
	(W)		C	

* Component of message waiting lamp assembly located between dial mounting brackets. Use screws from terminal board in D-180229 Kit of Parts.

Note: Terminal board and retainer furnished with D-180229 Kit of Parts are not used on sets equipped with message waiting feature. Install polarity guard only when specified by local instructions for end-to-end signaling.

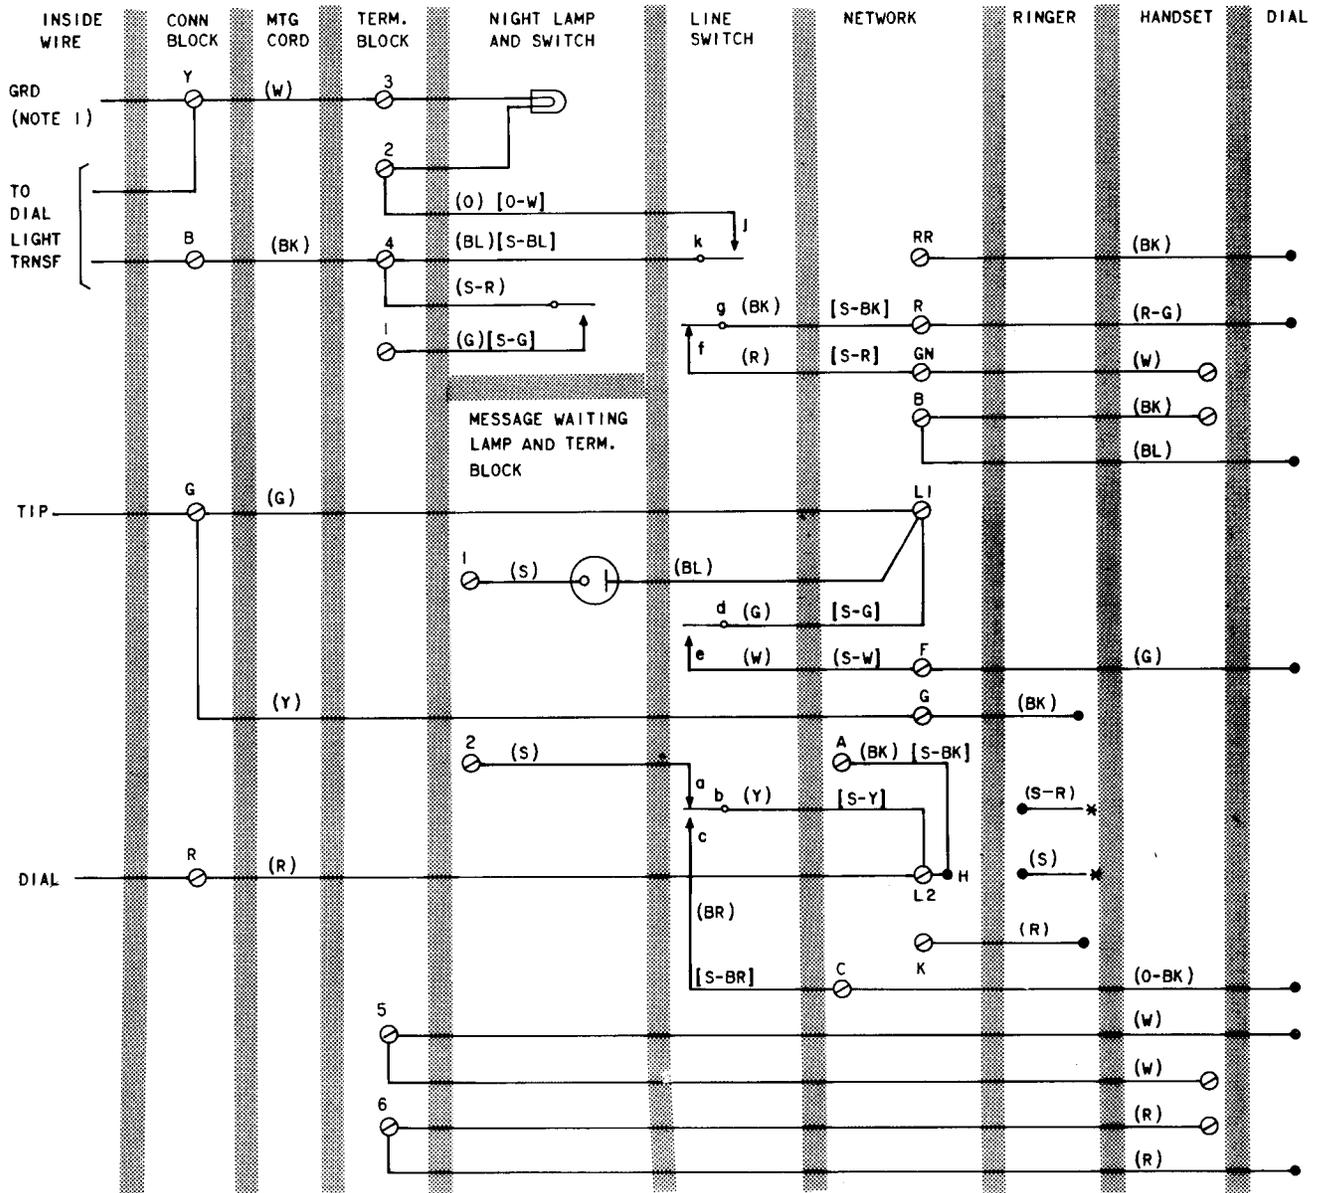

NOTES:

1. GROUND MAY BE OMITTED IF NOT REQUIRED FOR SERVICE; NOT NECESSARY FOR PROTECTION OF DIAL LIGHT TRANSFORMER.
2. TO PERMANENTLY SILENCE RINGER, DISCONNECT (R) RINGER LEAD AT K OF NETWORK. INSULATE AND STORE LEAD.
3. SET WIRED FOR BRIDGED RINGING

- * INSULATED AND STORED
- () CURRENT COLOR CODE
- [] MD COLOR CODE

Fig. 2—1702D Telephone Set Connections With 25H4 Dial, Early Production