

## SERVICE

### 1713B TELEPHONE SETS

#### 1. GENERAL

- 1.01 Reissued to add nontechnical changes to Fig. 1 and 2.

**TABLE A**  
**POLARITY GUARD CONNECTIONS FOR**  
**1713B TELEPHONE SETS**  
**(D-180229 KIT OF PARTS)**

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM BLOCK*
Line Switch	BR	C		4
Dial	BK	RR		3
Polarity Guard	R			3
	BK			4
	G		RR	
	W		C	

\*Component of polarity guard assembly.

**Note:** Install polarity guard assembly only when specified by local instructions for end-to-end signaling.

SECTION 502-728-402


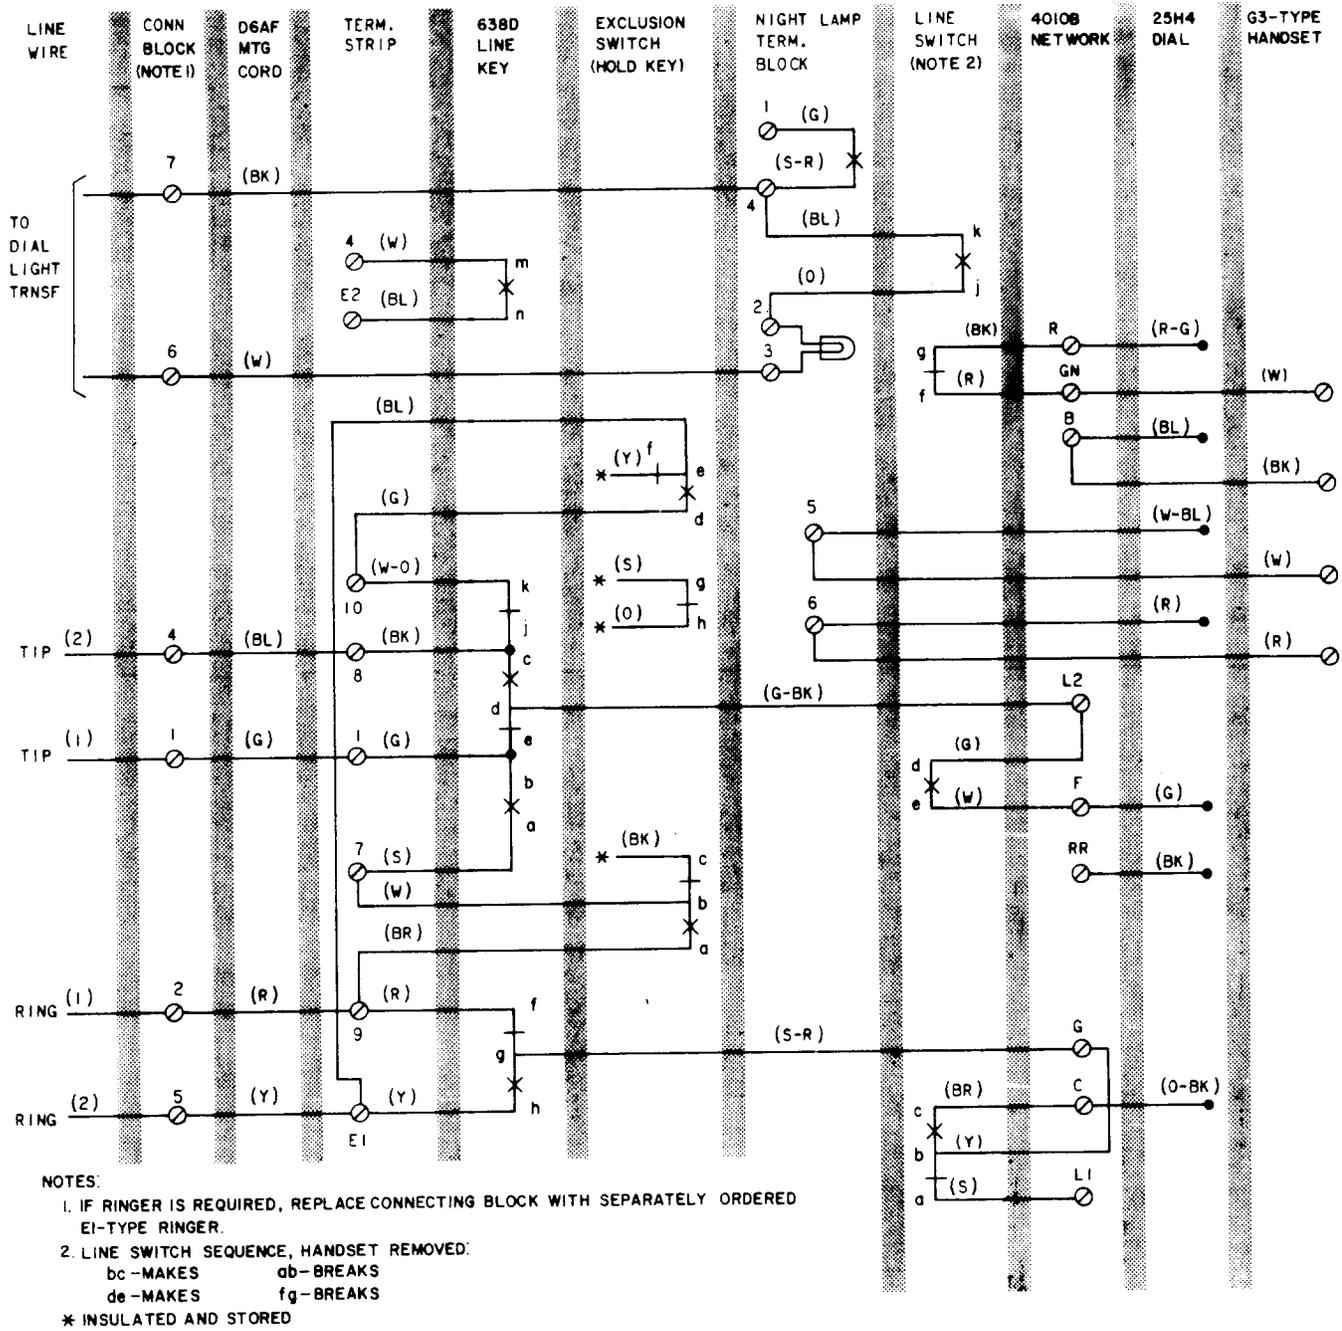


Fig. 1—1713B Telephone Set Connections With 25H4 Dial

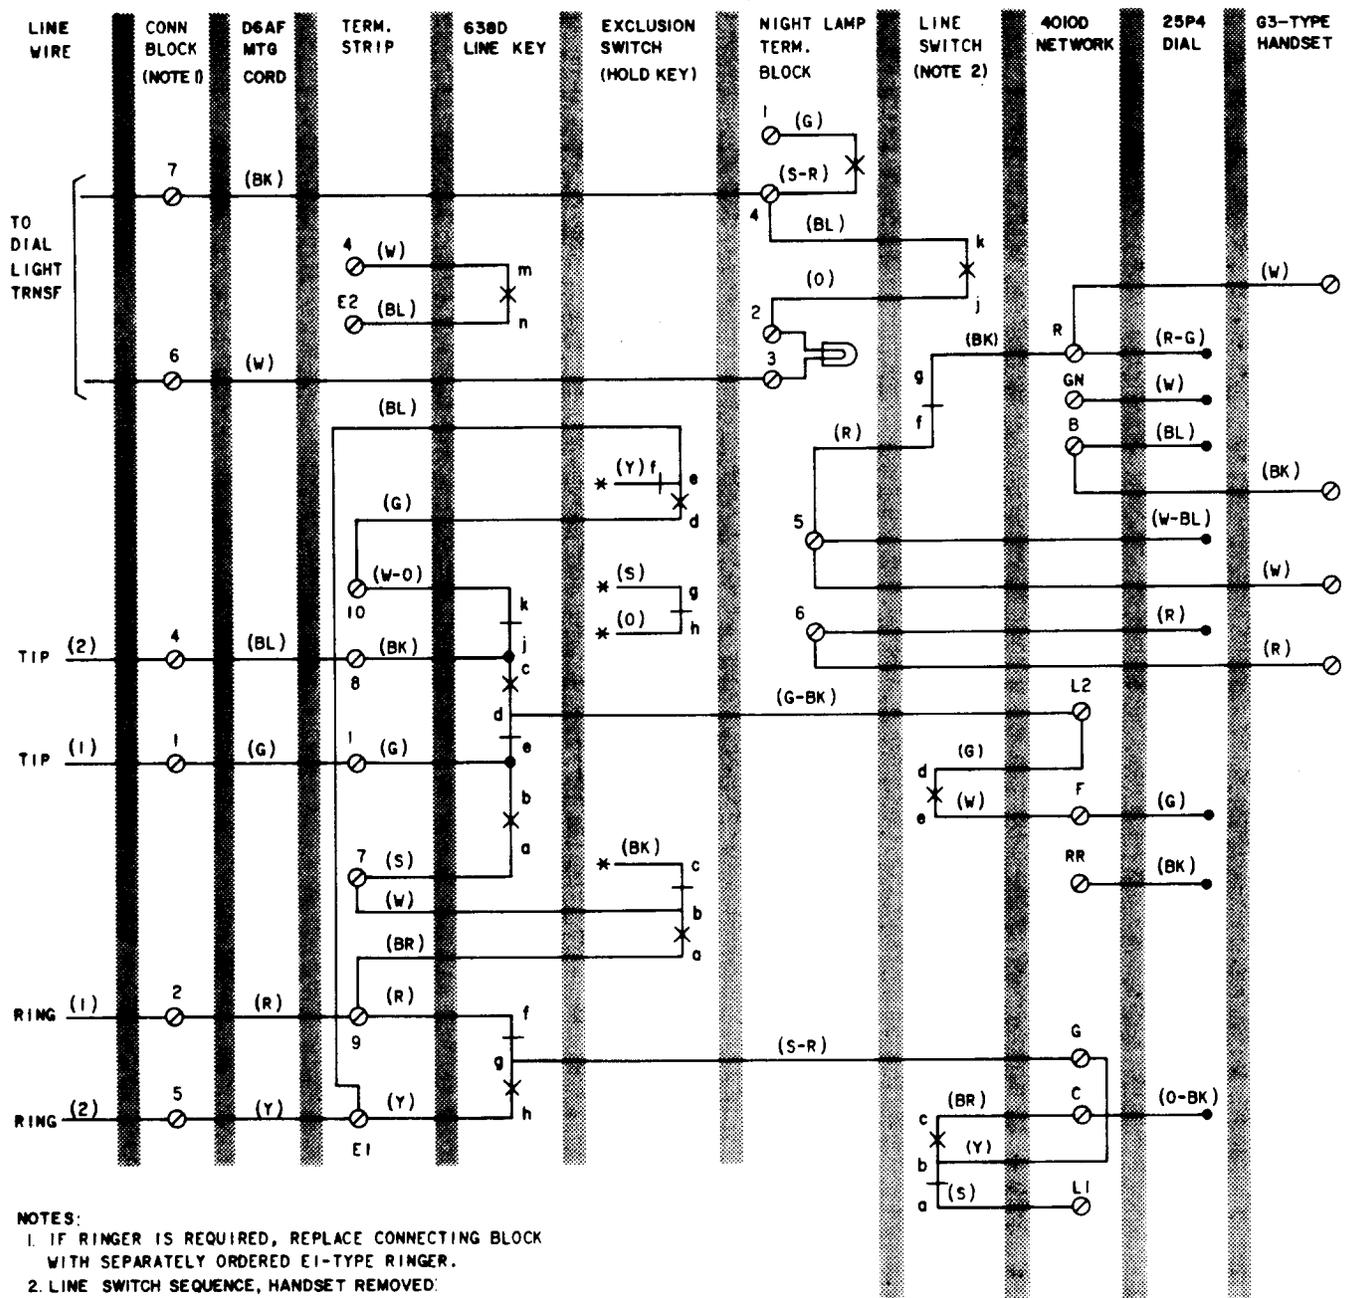

- NOTES:
- IF RINGER IS REQUIRED, REPLACE CONNECTING BLOCK WITH SEPARATELY ORDERED E1-TYPE RINGER.
  - LINE SWITCH SEQUENCE, HANDSET REMOVED:  
 bc-MAKES      ab-BREAKS  
 de-MAKES      fg-BREAKS  
 \* INSULATED AND STORED

◆Fig. 2—1713B Telephone Set Connections With 25P4 Dial◆