

SERVICE

2751-TYPE TELEPHONE SETS

CONNECTIONS

1. GENERAL

1.01 This section contains information on the 2751-type telephone sets which can be used behind PBX and 1A1 or 1A2 KTS. *These sets are intended for business type service only.*

1.02 Reissued to:

- Add 2751CG-58 and 2751DG-60 telephone sets
- Add D-181006 Kit of Parts
- Add Tables B and C
- Show 2751C-58 and 2751D-60 telephone set MD.

1.03 The 2751CG-58 and 2751DG-60 are the same as the 2751C-58 (MD) and 2751D-60 (MD) telephone sets, respectively, except the 2751CG-58 and 2751DG-60 sets have a polarity guard installed at the factory.

TABLE A
POLARITY GUARD CONNECTIONS D-181006 (840364376)
KIT OF PARTS (Note)

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	BK	RR	T	
Line Switch	W	C	S	
Polarity Guard	W			C
	G			RR

Note: For field installation when specified by local instructions for end-to-end signaling.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

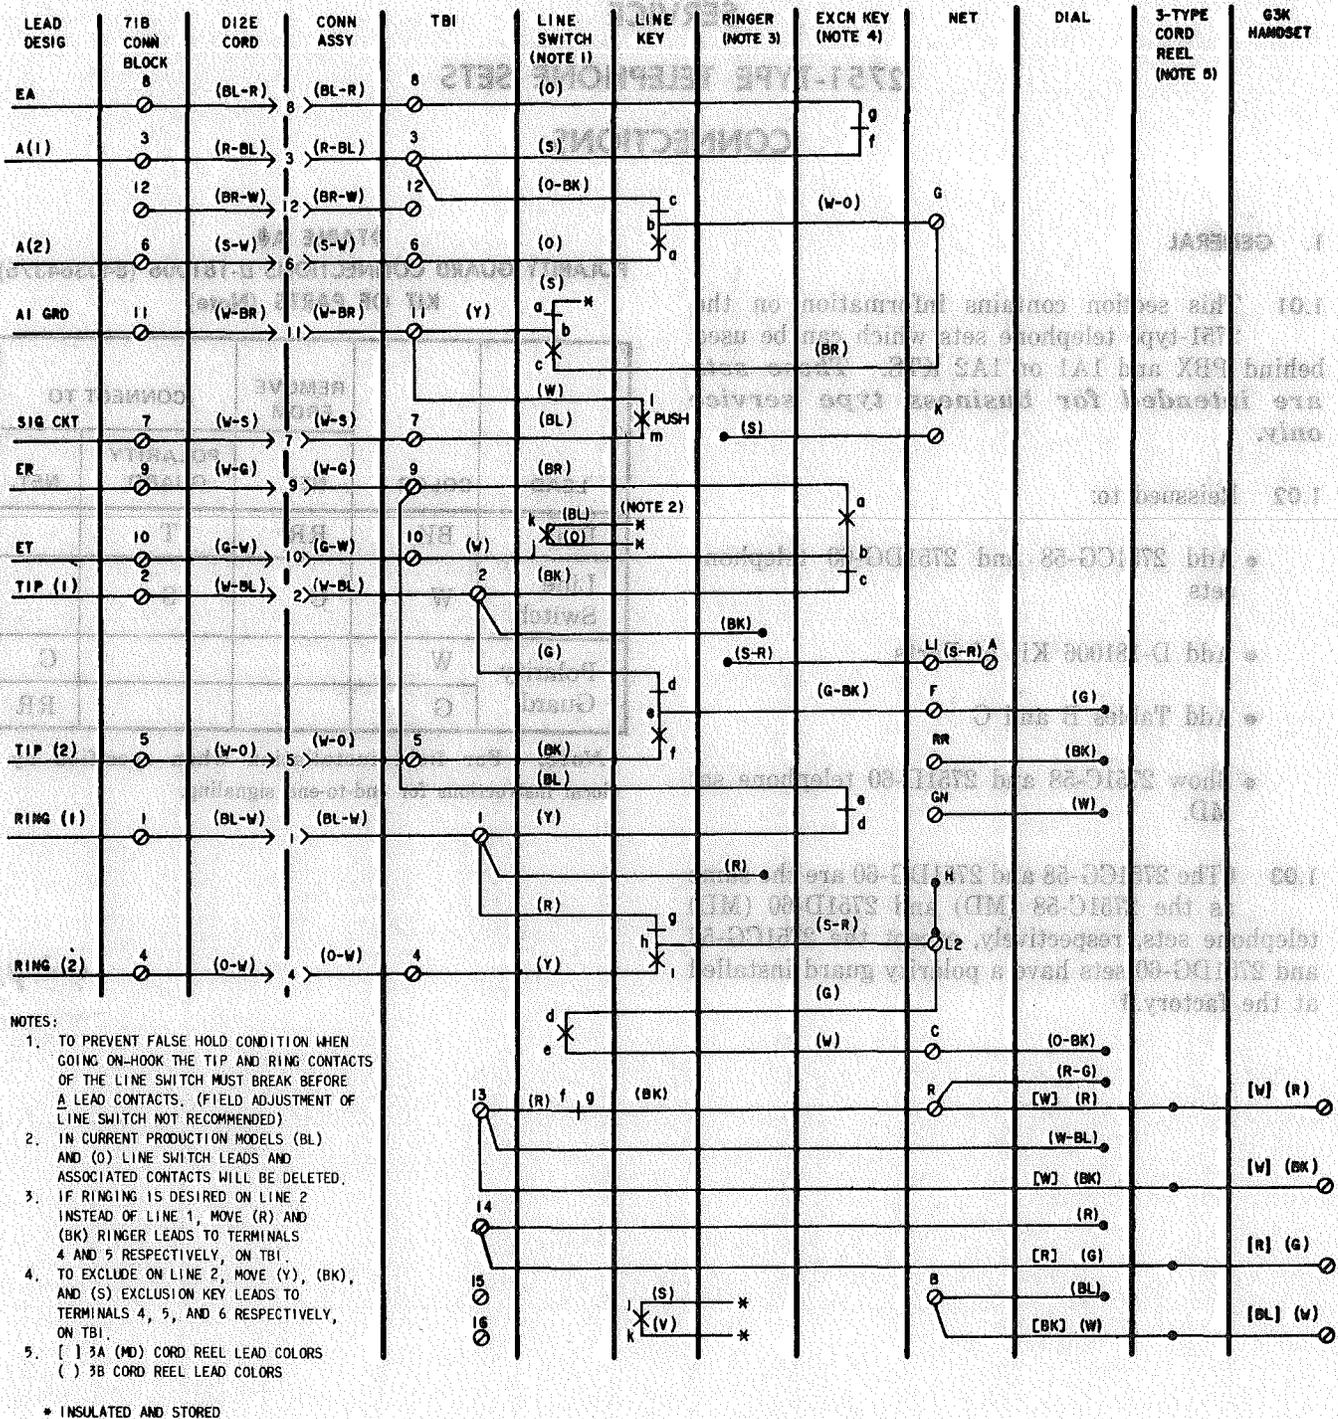


Fig. 1—2751C-58 (MD) or 2751D-60 (MD) Telephone Set, Connections

TABLE B

CONVERSION FOR SECRETARIAL SERVICE,
SIGNALING, AND HOLD (NONKEY SYSTEM)

APPARATUS	LEAD	REMOVE FROM		CONNECT TO
		TB1	NET.	TB1
Line Switch	Y	11		*
	BR		G	*
Exclusion or Hold Key	BR	9		1
	W	10		2
	BK	2		*
	Y	1		*
	BL	9		*
	S	3		*
	O	8		*
584G Line Key	O	6		10
	W-O		G	2
	O-BK	3		*
	V		†	1
	S		†	9
	W	11		6

* Insulate and store.

† Stored location.

TABLE C

CONVERSION FOR 1-LINE PICKUP, SIGNALING,
AND CUTOFF FEATURE

WIRE OR LEAD	REMOVE FROM		CONNECT TO	
	TB1	NET.	TB1	NET.
Line Switch	BR	G	3	
	G	L2	1	
Exclusion or Hold Key	BR	9		*
	W	10		*
	BK	2		*
	Y	1		*
	BL	9		*
	S	3		*
	O	8		*
584G Line Key	G-BK	F	2	
	G	2		*
	O-BK	3		*
	W-O	G	3	
	R	1		*
	S-R	L2	1	
	W	11	10	
	BL	7	9	
M1W cord or Equivalent	Strap		2	F

* Insulate and store.