

SERVICE

2753A AND B TELEPHONE SETS

1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1 and Table A.



The 3A cord reels shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.


◆ TABLE A ◆

**POLARITY GUARD CONNECTIONS
(P-90D060 GUARD ASSEMBLY)**

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	BK	RR	T	
Line Switch	BR	C	S	
Polarity	G			RR
Guard	W			C

Note: For use when specified by local instructions for end-to-end signaling installations.

SECTION 502-741-401

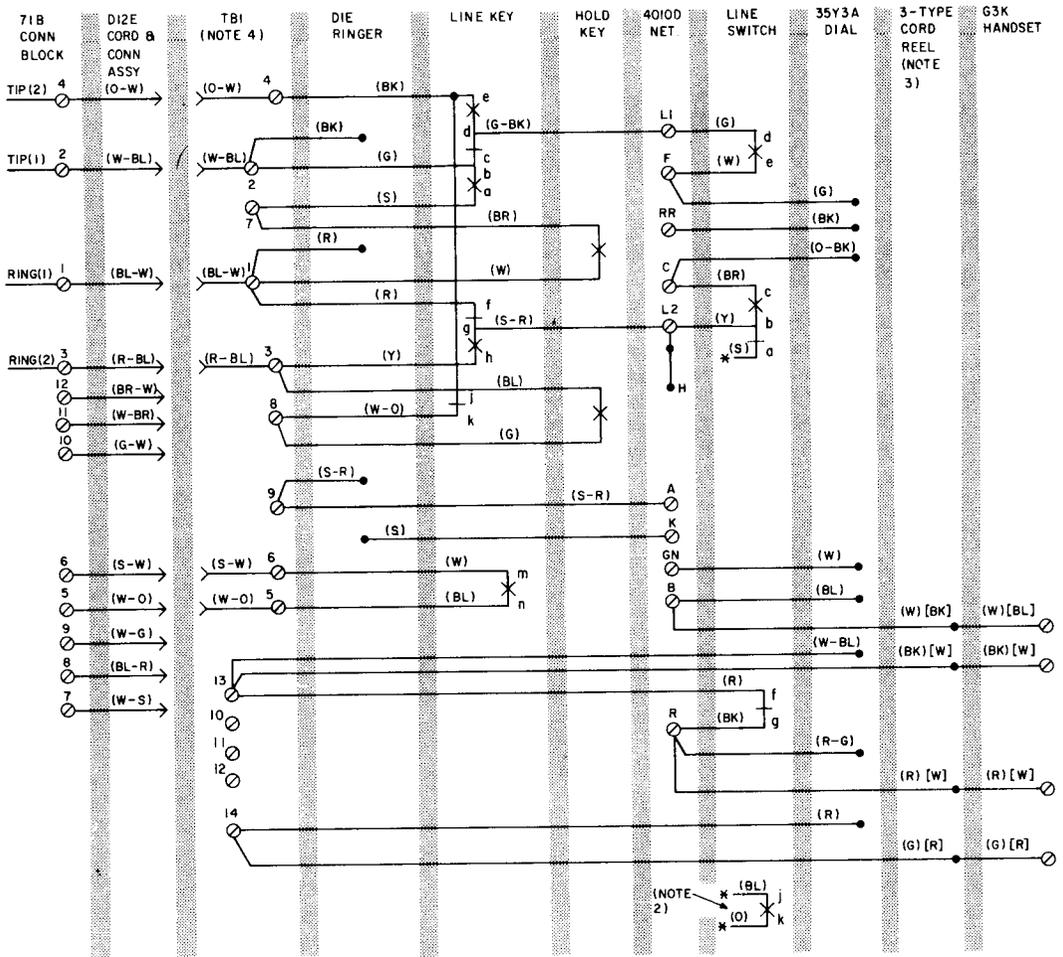

NOTES:

1. CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINAL 3 AND 4.
 2. (BL) AND (O) LINE SWITCH LEADS AND ASSOCIATED CONTACTS WILL BE DELETED IN LATER PRODUCTION MODELS.
 3. () 3B CORD REEL
[] 3A CORD REEL
 4. TERMINALS 3 THRU 12 WERE LOCATED ON T82 IN EARLY MODEL SETS.
- * INSULATED AND STORED

LINE SWITCH SEQUENCE

- bc - MAKE
- de - MAKE
- ab - BREAK
- fg - BREAK
- jk - MAKE

Fig. 1—2753A and B Telephone Set, Connections