

## KS-22235 ECONOSHELF

### IDENTIFICATION, INSTALLATION, AND MAINTENANCE

#### 1. GENERAL

1.01 The KS-22235, List 1 Econoshelf (Fig. 1), is a telephone enclosure intended for indoor use and designed for wall mounting.



Fig. 1—KS-22235, List 1 Econoshelf

1.02 Whenever this section is reissued, the reason for reissue will be listed in this paragraph.

#### 2. IDENTIFICATION

2.01 This enclosure is constructed of high quality medium density, 3/4-inch thick particle board which is covered with wood grain finished vinyl.

2.02 The overall dimensions are:

- Height—30-1/2 inches
- Width—20 inches
- Depth—12 inches
- Weight is approximately 33 pounds.

2.03 The basic Econoshelf includes:

- Back panel for mounting coin collector/telephone set
- Two side panels
- Inclined writing shelf (self-cleaning)
- Directory storage shelf.

2.04 The KS-22235 Econoshelf is furnished fully assembled and can be installed in minimum time by one person.

#### Ordering Information

2.05 When ordering specify the quantity, KS number, and list number. Each Econoshelf is furnished with a mounting bracket, (Fig. 2).

#### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

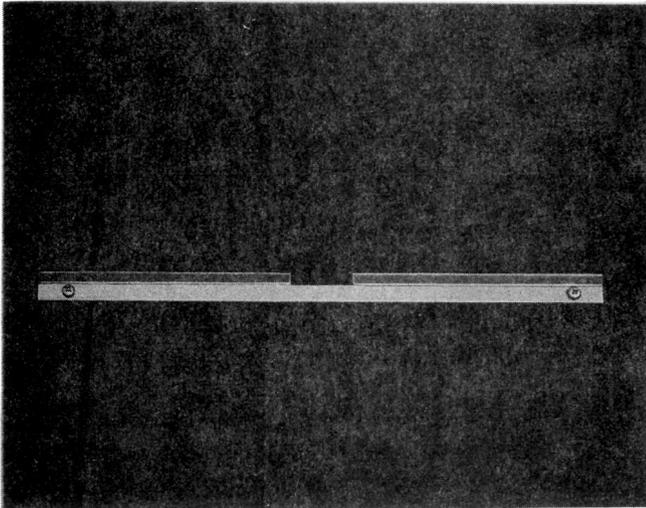


Fig. 2—L-905636 Wall Mounting Bracket

**3. INSTALLATION**

**3.01** Econoshelf location should be:

- Within full view of public
- Readily accessible to customer
- Free of hazards as broken or uneven flooring.

**3.02** Ensure that wall will provide a secure mounting for the shelf.

**3.03** Install the shelf as follows.

- (1) Install the mounting bracket (Fig. 3) to the wall using appropriate fasteners. The fasteners shall be 1/4-inch in diameter. All hardware must be furnished locally.
- (2) Hang the enclosure on wall bracket (Fig. 3).
- (3) Install telephone wiring as required.

- (4) Attach enclosure to wall with six (6), 3/8-inch diameter flat head screws. Mounting holes (Fig. 1) are located on back panel. Hardware furnished locally.
- (5) Install the coin telephone set to the back panel.

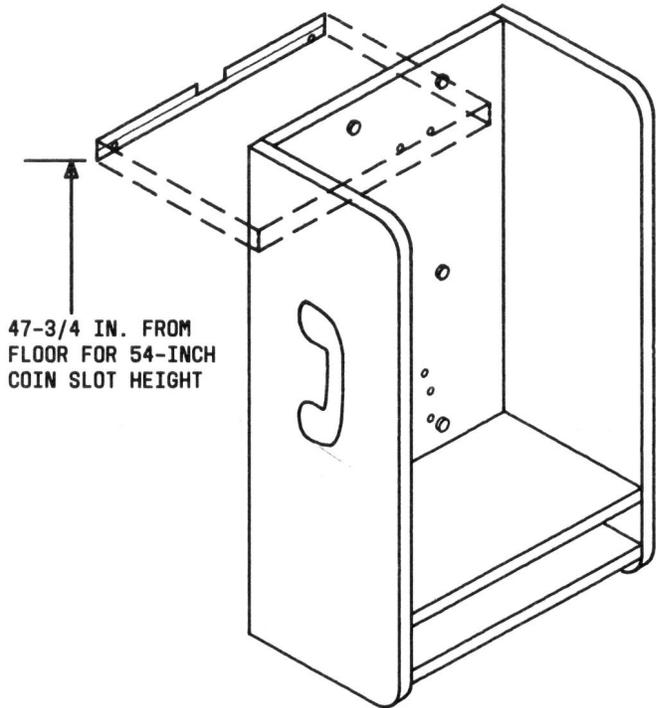


Fig. 3—Mounting Location For KS-22235, List 1 Econoshelf

**4. MAINTENANCE**

- 4.01** Maintenance will consist of replacing complete Econoshelf and cleaning.
- 4.02** Refer to Section 508-100-101 for cleaning.