

TELEPHONE MOUNTING

KS-20842

1. GENERAL

1.001 This addendum supplements Section 508-452-100, Issue 2.

1.002 This addendum is issued to add information on the new KS-20842, List 72 sign kit, and the KS-20842, List 44 wall mounting bracket, and to clarify 3.13.

2. CHANGES TO SECTION

2.001 Add the following information to Page 8, after paragraph 2.29:

2.29.1 A KS-20842, List 72 sign kit is available to provide a means of installing a KS-20031, List 1 illuminated sign on top of the KS-20842, List 70 mast Fig. 29.1 and 29.2.

2.29.2 A KS-20842, List 44 wall mounting bracket (Fig. 29.3) is available for installing a walk-in housing on a wall.◆

2.002 ◆Revise paragraph 3.13 on Page 26 as follows:

3.13 Install two or more bases side-by-side in a straight line. Bases must be spaced 28-3/4 inches center to center.◆

2.003 Add the following information to Page 30, after paragraph 3.19:

3.19.1 Install the List 72 sign kit and the KS-20031, List 1 sign as follows:

- (1) Remove the three bolts and plug from top of mast (Fig. 29.1).
- (2) Install sign kit, which includes gasket adapter and mounting hardware, on top of mast using the three screws furnished (Fig. 29.2).

(3) Install electrical wiring in mast before securing sign to adapter.

(4) Secure KS-20031, List 1 sign to adapter using the four Phillips RH machine screws furnished with kit.

Note: The KS-20031, List 1 sign may be mounted with a flat side of the lens facing forward or it may be rotated 180 degrees to provide a corner in the forward position. Change mounting positions by removing four cap nuts from the bottom, rotating the lens 180 degrees, and securing it again with the cap nuts. For complete information on the sign refer to Section 508-810-202.

(5) Wiring connections should conform to connections of the housing fluorescent lamp.

Caution: *Do not expose eyes or skin to ultra violet rays of a burning mercury arc if the outer glass envelope is broken.*

3.19.2 ◆Install the List 44 wall mounting bracket as follows:

(1) Hold the mounting on wall at the required height (Fig. 29.3) and mark the location for two fasteners at the key hole slots.

(2) Put the mounting aside and install the two fasteners at the marked locations. Use screws or bolts per Table C.

(3) Hang mounting on the two fasteners and further secure it to wall with eight additional fasteners.

3.19.3 Install walk-in housing on the List 44 mounting using same procedure as if installing it on a post (see paragraph 3.10).◆

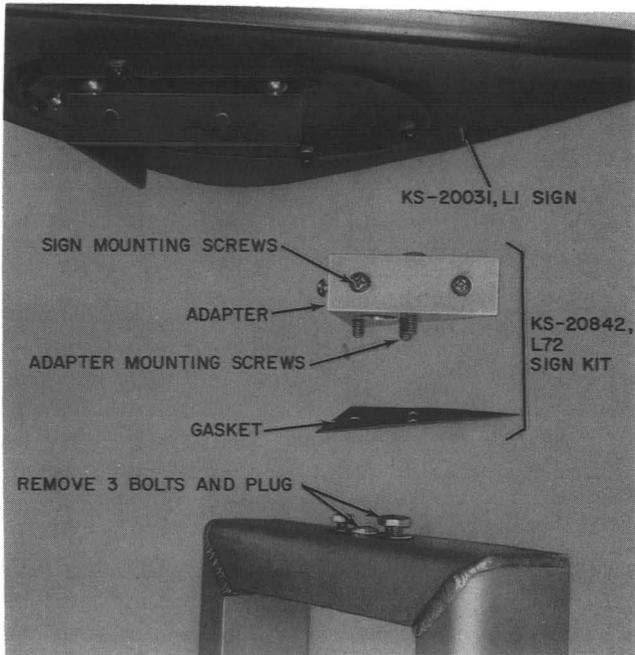


Fig. 29.1—Installation of KS-20031, List 1 Sign

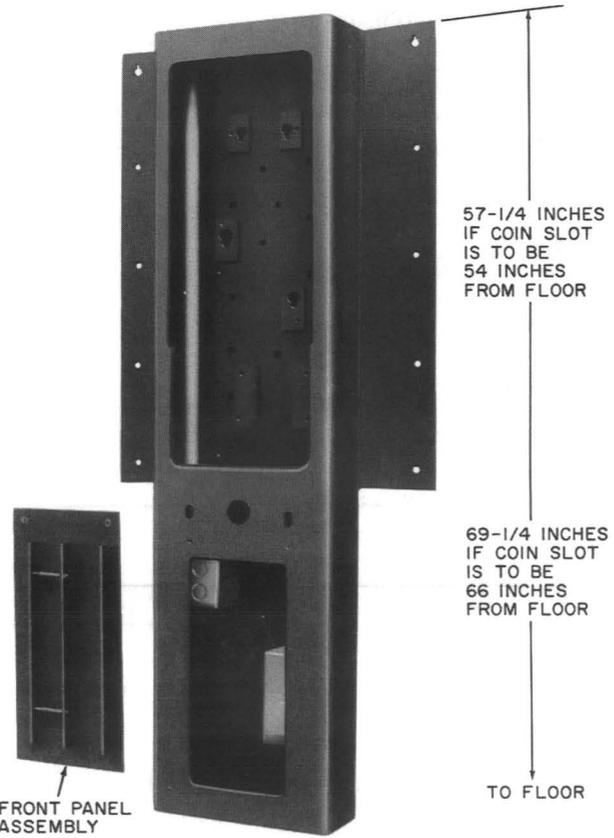


Fig. 29.3—KS-20842, List 44 Wall Mounting Bracket

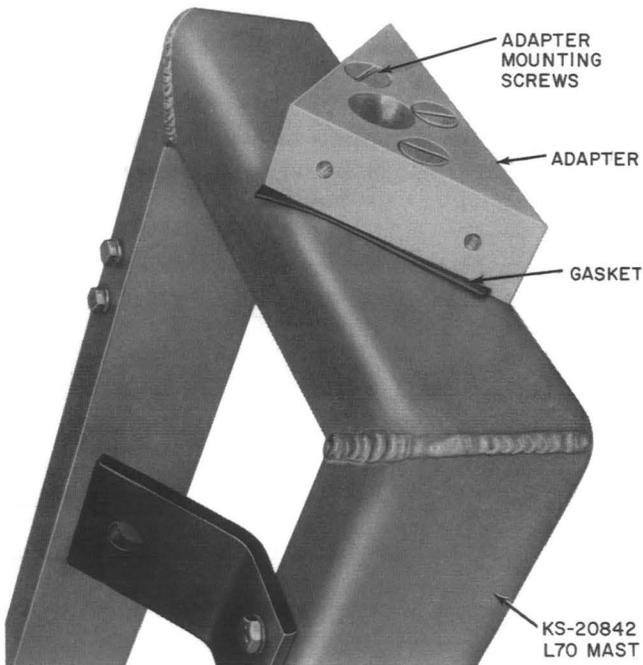


Fig. 29.2—Installation of KS-20842, List 72 Sign Kit