

HAND TELEPHONE SETS — 201A

MAGNETO — CONNECTIONS

1.00 INTRODUCTION

This section covers the combination of apparatus, circuit diagram, and connections for the 201-type hand telephone sets for magneto service.




FIG. 1—201 TYPE

TABLE A—COMBINATION OF APPARATUS

Hand Tel. Set Code	Components				Note
	Handset	Handset Mounting	Handset Cord	Apparatus Blank	
201A-3E	E1E-3	C1-3	H-3	—	1, 2
201A-3F	F1A-3, F1B-3, or F4A-3				

Notes

- Codes listed are for apparatus with black finish. For apparatus finished in other colors, the dash number (—3) is changed to the code number for the particular color.
- When the handset is equipped with spring cord, the suffix R will be added to the set code. For example, a 201A-3F becomes a 201AR-3F.

2.00 GENERAL

2.01 The 201A hand telephone set may be used in combination with any of the subscriber sets shown in Table B.

2.02 Hand telephone sets equipped with E-type handset may be used when their use does not conflict with transmission zoning requirements.

2.03 To obtain complete information on connection of station apparatus, the circuit diagram herein should be matched with the circuit diagram in the section covering the connections for the appropriate subscriber set.

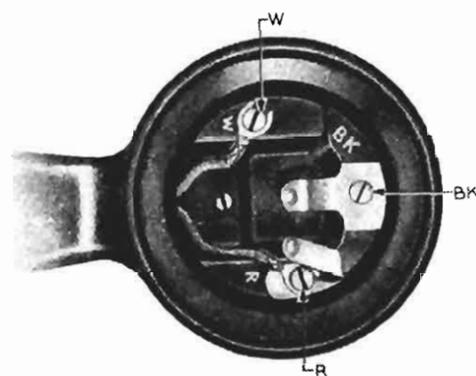
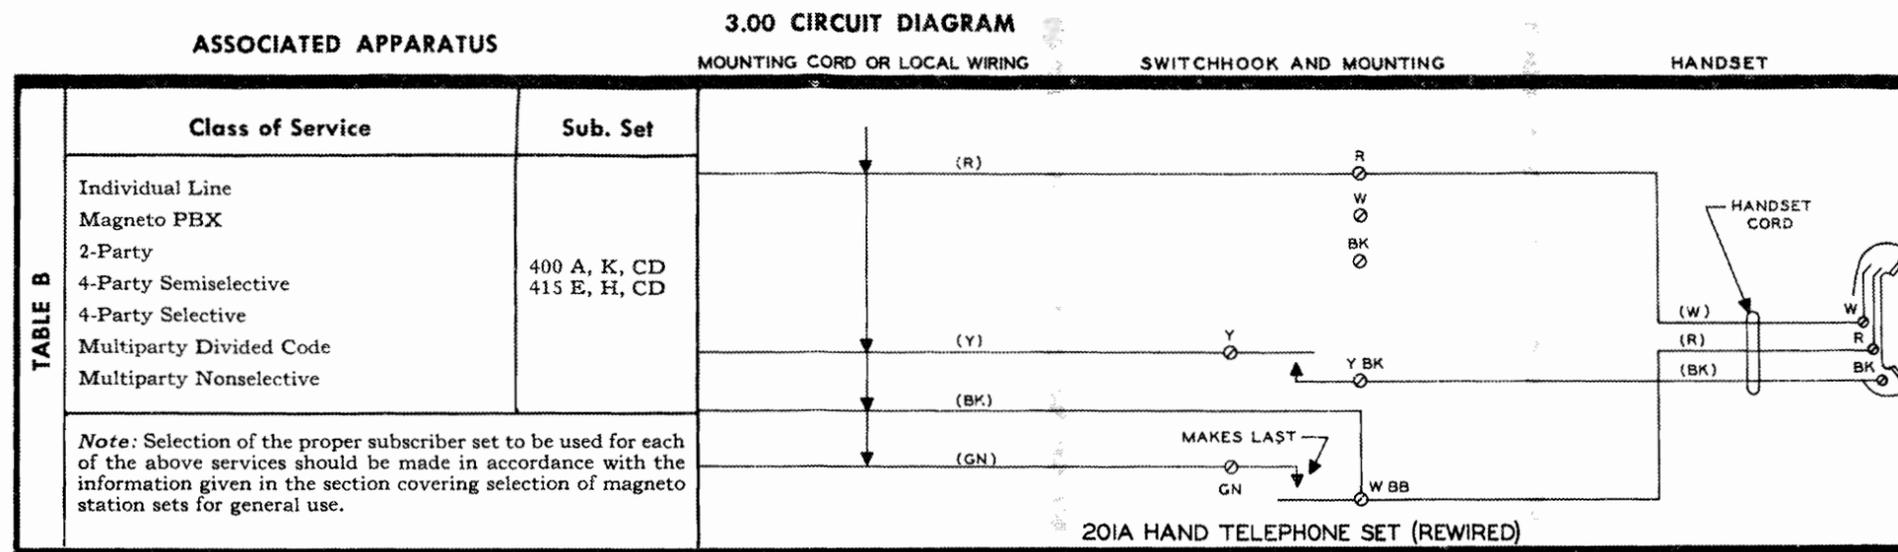


FIG. 2—F1A-3 AND F4 HANDSET

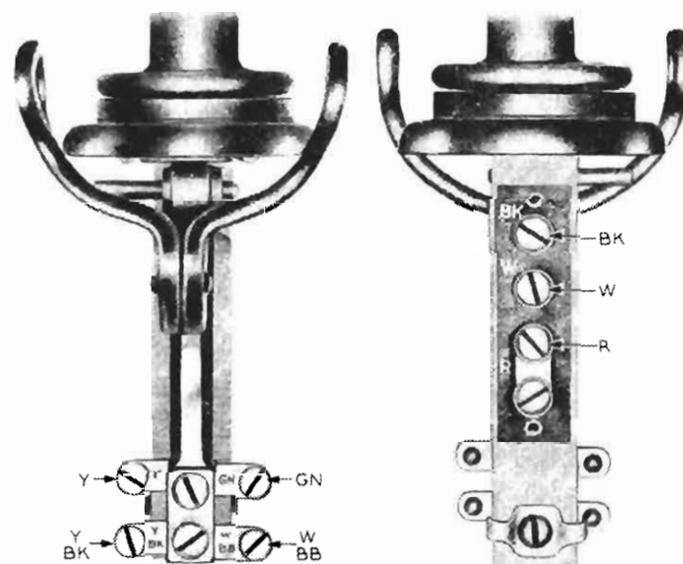


FIG. 3—C1-3 HANDSET MOUNTING