

SPEAKERPHONE SYSTEMS—3-TYPE

2565-TYPE TELEPHONE SETS

CONNECTIONS

1. CONNECTIONS

(a) This section provides connections between components of the 3-type speakerphone system and the 2565GK, 2565HK, and 2565LK telephone sets.

(b) The connections shown in this section are for use with 1A1 or 1A2 KTS. To convert telephone sets for 1A KTS or for complete set connections, refer to the following sections:

- 2565GK—Section 502-525-435
- 2565HK—Section 502-525-436
- 2565LK—Section 502-525-437

(c) Use a 55B control unit with these sets, or a 55A modified for use with TOUCH-TONE® telephone sets. Modified control units may be identified by an asterisk following the code.

(d) When using a 666-type transmitter unit equipped with a T11A cord, insulate and store the spare conductors.

2. CONNECTION INDEX

Fig. 1—Connections For 2565-Type Telephone Set Using 66E-Type Connecting Block

Fig. 2—Connections For 2565-Type Telephone Set Using 149-Type Adapter

SECTION 512-622-415


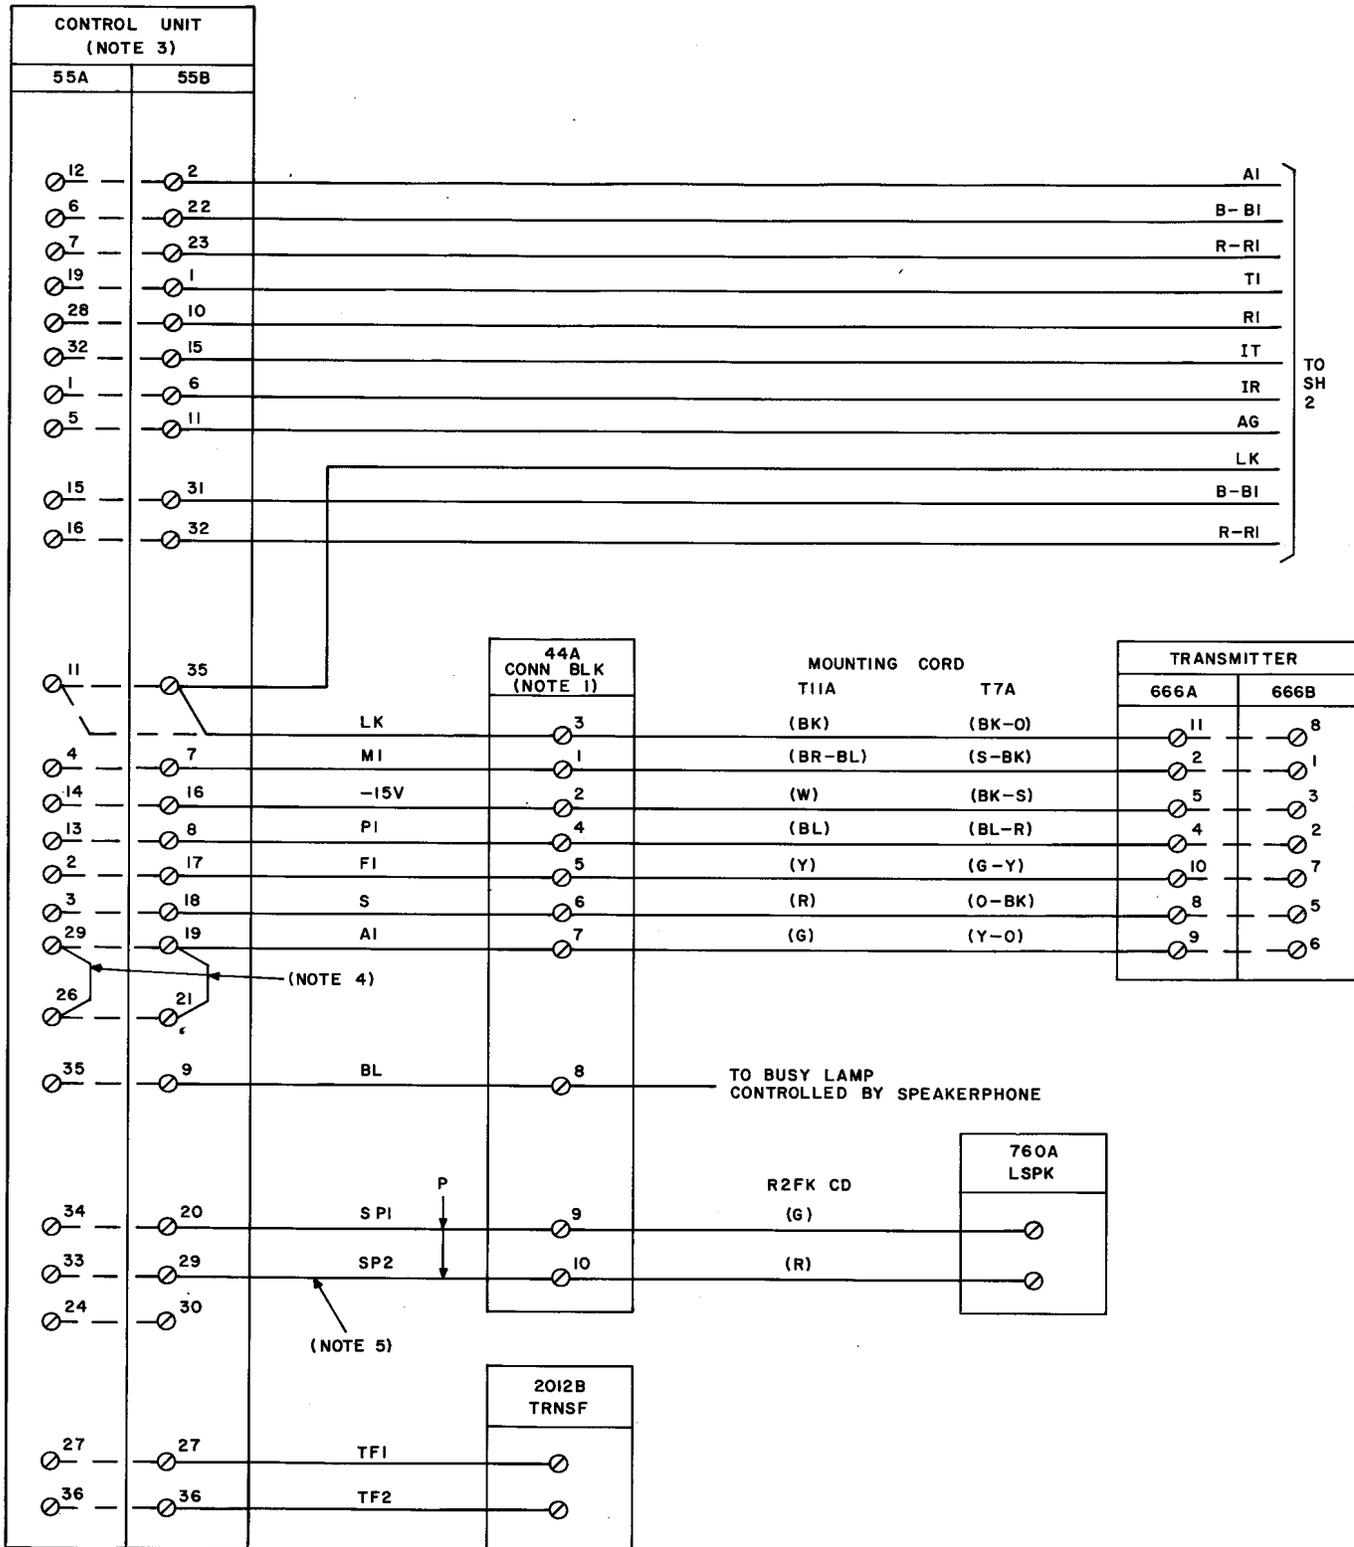


Fig. 1—Connections For 2565-Type Telephone Set Using 66E-Type Connecting Block (Sheet 1 of 2)

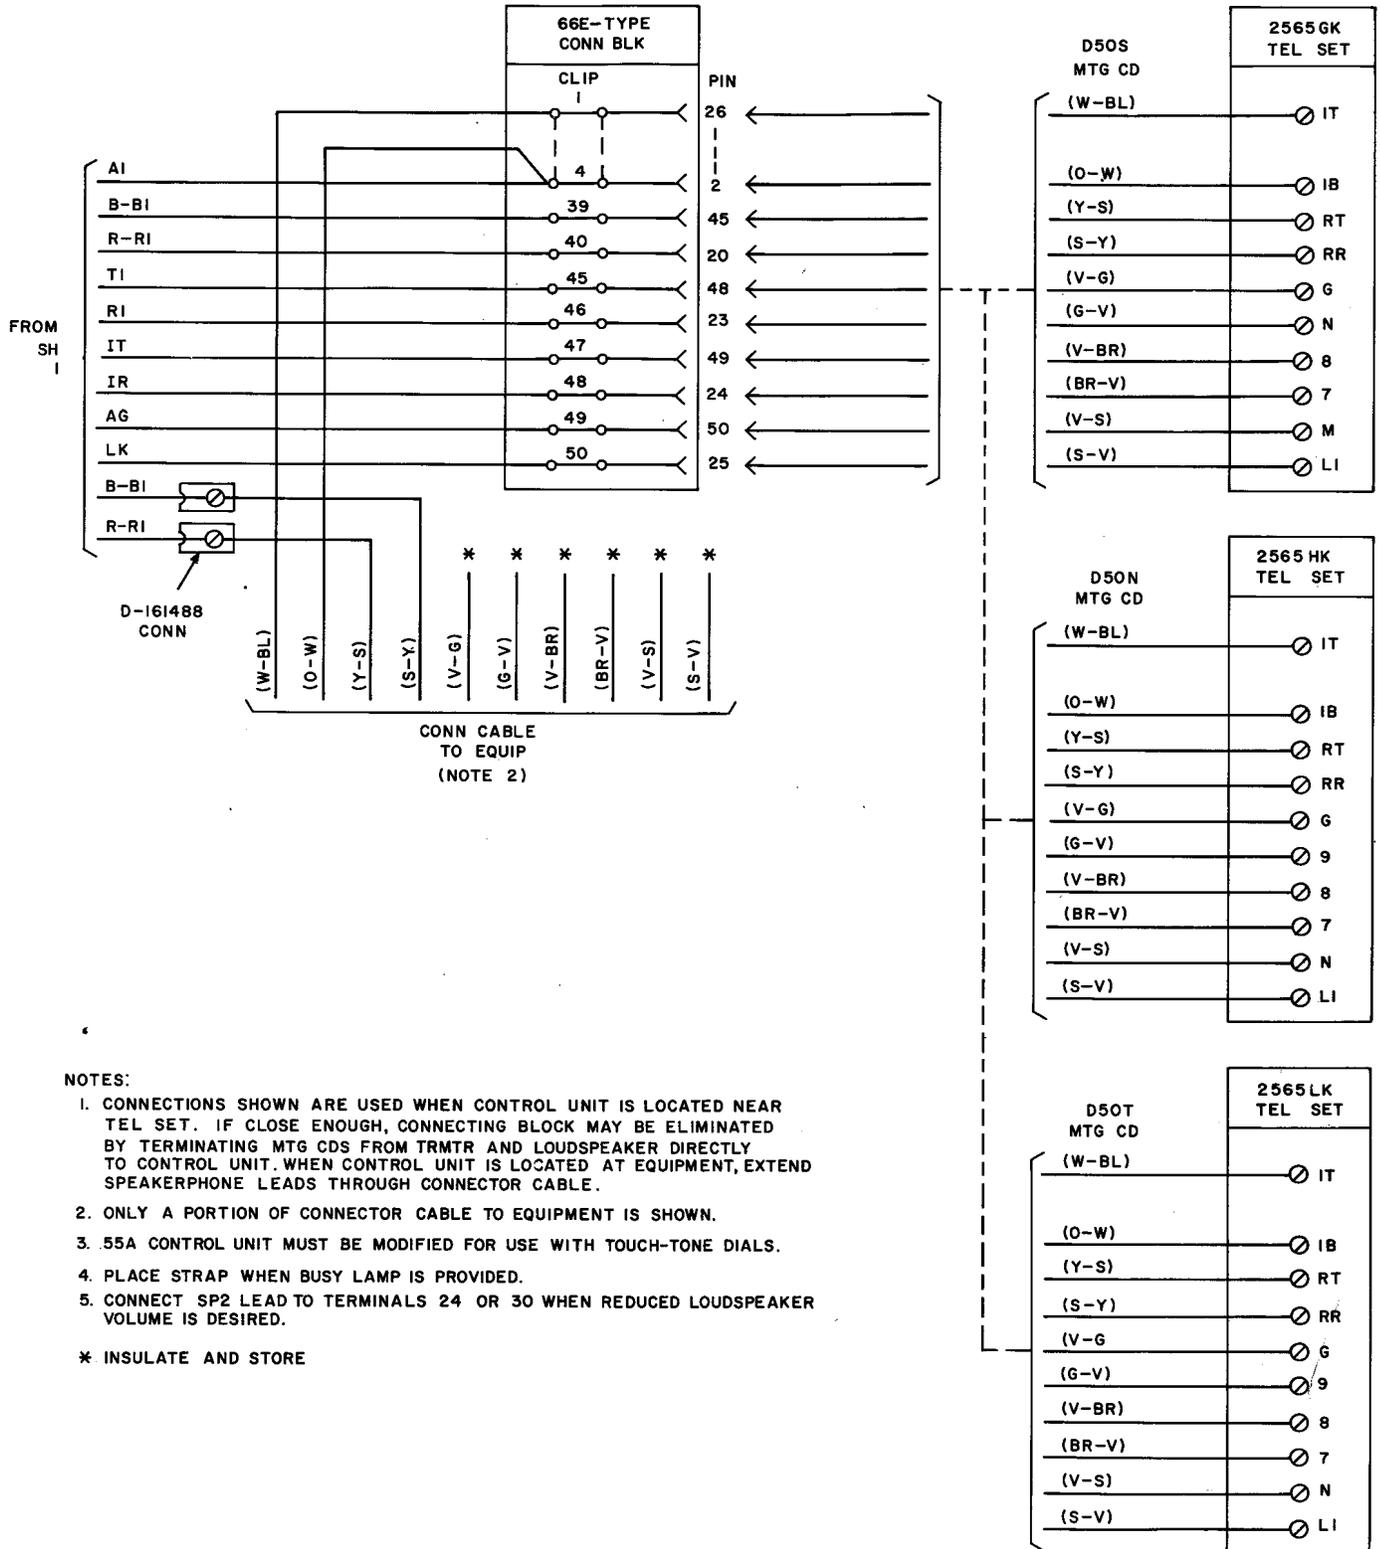

NOTES:

1. CONNECTIONS SHOWN ARE USED WHEN CONTROL UNIT IS LOCATED NEAR TEL SET. IF CLOSE ENOUGH, CONNECTING BLOCK MAY BE ELIMINATED BY TERMINATING MTG CDS FROM TRMTR AND LOUDSPEAKER DIRECTLY TO CONTROL UNIT. WHEN CONTROL UNIT IS LOCATED AT EQUIPMENT, EXTEND SPEAKERPHONE LEADS THROUGH CONNECTOR CABLE.
 2. ONLY A PORTION OF CONNECTOR CABLE TO EQUIPMENT IS SHOWN.
 3. 55A CONTROL UNIT MUST BE MODIFIED FOR USE WITH TOUCH-TONE DIALS.
 4. PLACE STRAP WHEN BUSY LAMP IS PROVIDED.
 5. CONNECT SP2 LEAD TO TERMINALS 24 OR 30 WHEN REDUCED LOUDSPEAKER VOLUME IS DESIRED.
- * INSULATE AND STORE

Fig. 1—Connections For 2565-Type Telephone Set Using 66E-Type Connecting Block (Sheet 2 of 2)

SECTION 512-622-415


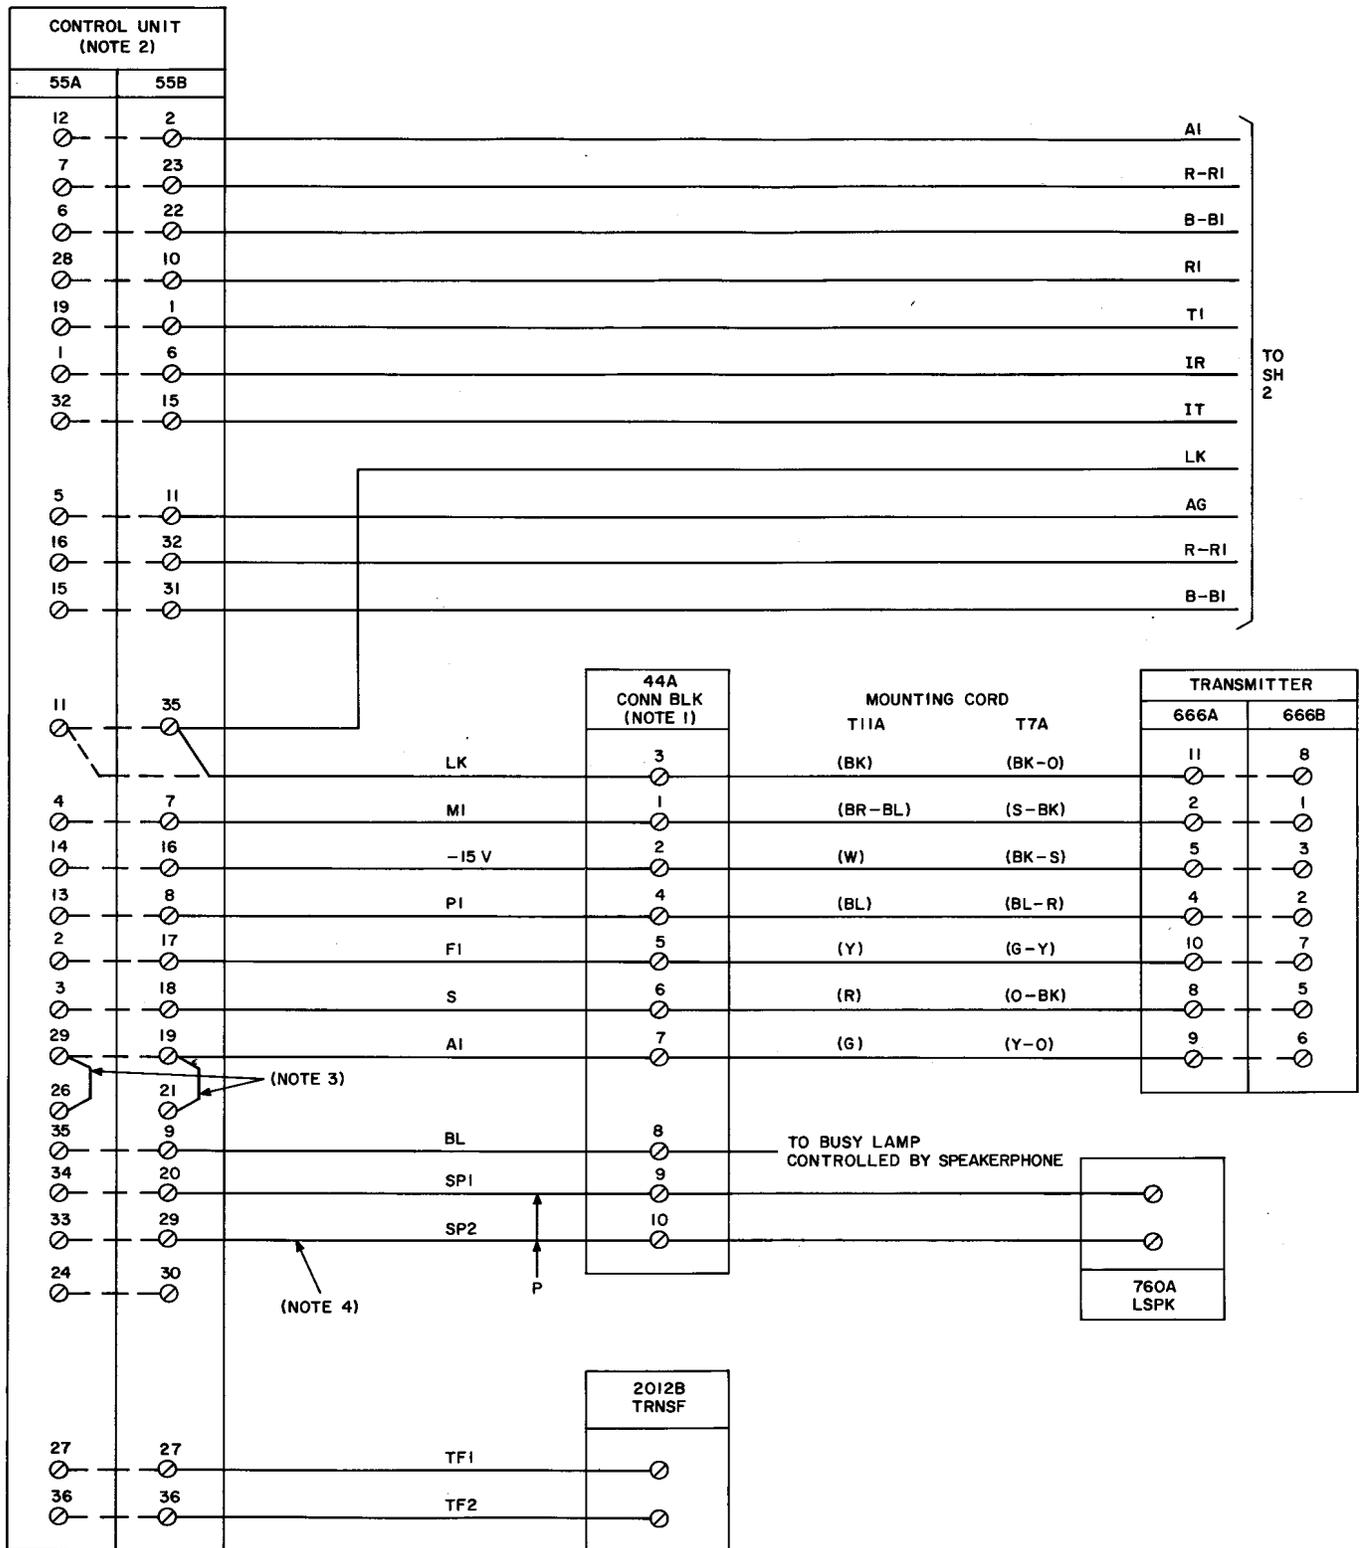


Fig. 2—Connections For 2565-Type Telephone Set Using 149-Type Adapter (Sheet 1 of 2)

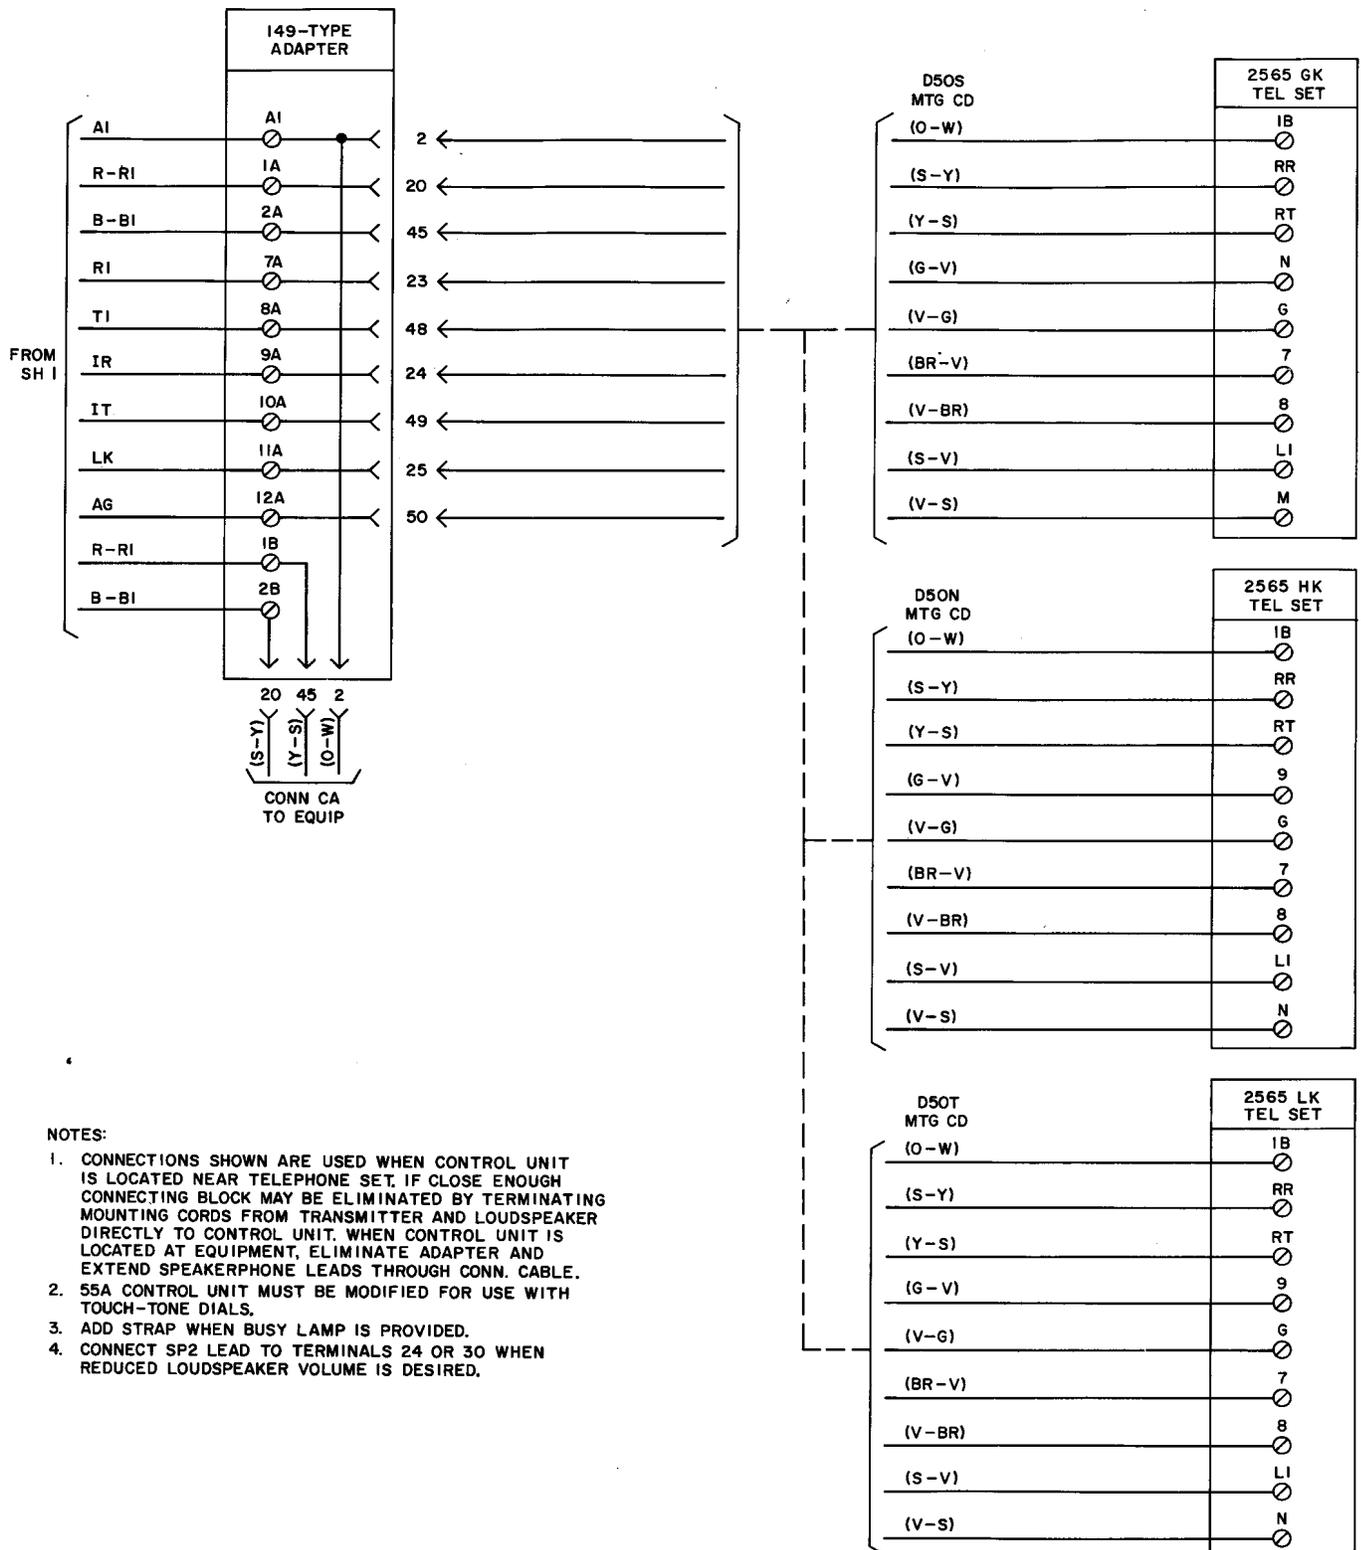

NOTES:

1. CONNECTIONS SHOWN ARE USED WHEN CONTROL UNIT IS LOCATED NEAR TELEPHONE SET, IF CLOSE ENOUGH CONNECTING BLOCK MAY BE ELIMINATED BY TERMINATING MOUNTING CORDS FROM TRANSMITTER AND LOUDSPEAKER DIRECTLY TO CONTROL UNIT. WHEN CONTROL UNIT IS LOCATED AT EQUIPMENT, ELIMINATE ADAPTER AND EXTEND SPEAKERPHONE LEADS THROUGH CONN. CABLE.
2. 55A CONTROL UNIT MUST BE MODIFIED FOR USE WITH TOUCH-TONE DIALS.
3. ADD STRAP WHEN BUSY LAMP IS PROVIDED.
4. CONNECT SP2 LEAD TO TERMINALS 24 OR 30 WHEN REDUCED LOUDSPEAKER VOLUME IS DESIRED.

Fig. 2—Connections For 2565-Type Telephone Set Using 149-Type Adapter (Sheet 2 of 2)