

28 CONSOLE and TABLE MODEL CABINETS (LAC) and 28 TABLE (LT)

PARTS

PAINT FINISH COLOR CODE CHART (for parts and assemblies requiring a paint finish)									
Color	Finish Suffixes				Color	Finish Suffixes			
	Wrinkle Finish	Smooth Finish	Textured Vinyl	Smooth Vinyl		Wrinkle Finish	Smooth Finish	Textured Vinyl	Smooth Vinyl
Black	AA (37)	BB			Brussels Light Blue		EC		
Dark Brown	AD (38)				Medium Blue		ES		
Gray Green	AB (40)	BK	GA (45)		Cherry Red		EF		
Charcoal Gray	AL	BZ		HA	Pastel Yellow		EG		
Dark Gray			GB		White		EH		
Light Gray		EJ		HB (68)	Ivory		EM		
Beige Gray			GC		Beige		ET		
Light Beige		EL		HC	Rose Beige		ER		
Moss Green		EN		HD	Rose Pink		EU		
Eye Rest Green		EA			Dark Covert Gray				HE
Turquoise		EV			Light Olive Gray	EW		GE	HF (46)
Aqua Blue		EK			Fawn				HG

The double asterisk (**) denotes a painted part. Suffix to be applied following the part number. Number in parenthesis indicate Bell System code.

FIGURE	CONTENTS	PAGE
1	Cabinet Components	3
2	Cabinet Components	4
3	Cabinet Variable Features	5
4	Cabinet Variable Features	6
5	173400** Modification Kit to Provide Offset Copyholder (Table Model)	7
6	153920 and 154741 Modification Kits to Adapt Cabinet for Selective Calling	8
7	Cable Components	9
8	164024** Modification Kit to Provide Offset Copyholder	9
9	178897** Modification Kit to Provide Offset Copyholder	10
10	159357 (5.5 Volt, AC) and 165668 (48 Volt, DC) Modification Kits to Provide a Copyleft System	11
11	Incandescent Copyleft System (6 Volt, AC)	12
12	154777 Modification Kit to Provide 60 Volt, DC Incandescent Copyleft System	13
13	159375 Modification Kit to Convert an AC Copyleft System to a 60 Volt, DC Copyleft System	14
14	152902 Modification Kit to Equip Cabinet with Busy Line Light	15
15	160224 Modification Kit to Add Open and Busy Line Indicator Lights	16
16	152319 Modification Kit to Provide Terminal Connections on Cabinet	16
17	144600 Key and Lamp Assembly (W/Typing Unit Interchange)	17
18	145220 Key and Lamp Assembly (W/O Typing Unit Interchange)	17
19	173238 Modification Kit to Add Reader Light to Cabinet	18
20	174458 Modification Kit to Provide Cabinet with a Paper Tearing Plate	18
21	145278 and 154756 Modification Kits to Add Form-Out Alarm Mechanism	19
22	176714 Modification Kit to Provide Low-Paper and Paper-Out Alarm	20
23	154793 Modification Kit to Add Shock Mounts to Console Cabinet	21
24	154754** Modification Kit to Provide Sub-Base for Console Cabinet for Stand-Up Operation	21
25	159373 Modification Kit to Provide an Apparatus Mounting Rack	22
26	159390 Modification Kit to Provide an Apparatus Mounting Rack	22
27	152349** Modification Kit to Provide Paper Supply and Accumulating Shelf	23
28	153901** Modification Kit to Provide Paper Winder Mounting Bracket	24
29	163796** Modification Kit to Provide Telephone Shelf for Console Cabinet	24
30	173097** Modification Kit to Provide Shelf for Console Cabinet	25
31	152300** Modification Kit to Provide Directory Holder for Table Model Cabinet	26
32	152910** Modification Kit to Provide Directory Holder for Console Model Cabinet	26
33	153926 Modification Kit to Provide Sprocket Feed Rear Paper Guide	26
34	154651 Modification Kit to Add Signal Line Electrical Noise Suppressor (DC)	27
35	151988 Modification Kit to Add Power Line Electrical Noise Suppressor	27
36	178387 Modification Kit to Provide High Voltage Static Eliminator to Neutralize Electrostatic Charge on Page Copy	28
37	Printer Table	29
38	Printer Table with Sliding Shelf	30
	Numerical Index	31

**Refer to Page 1 for Finish Suffix

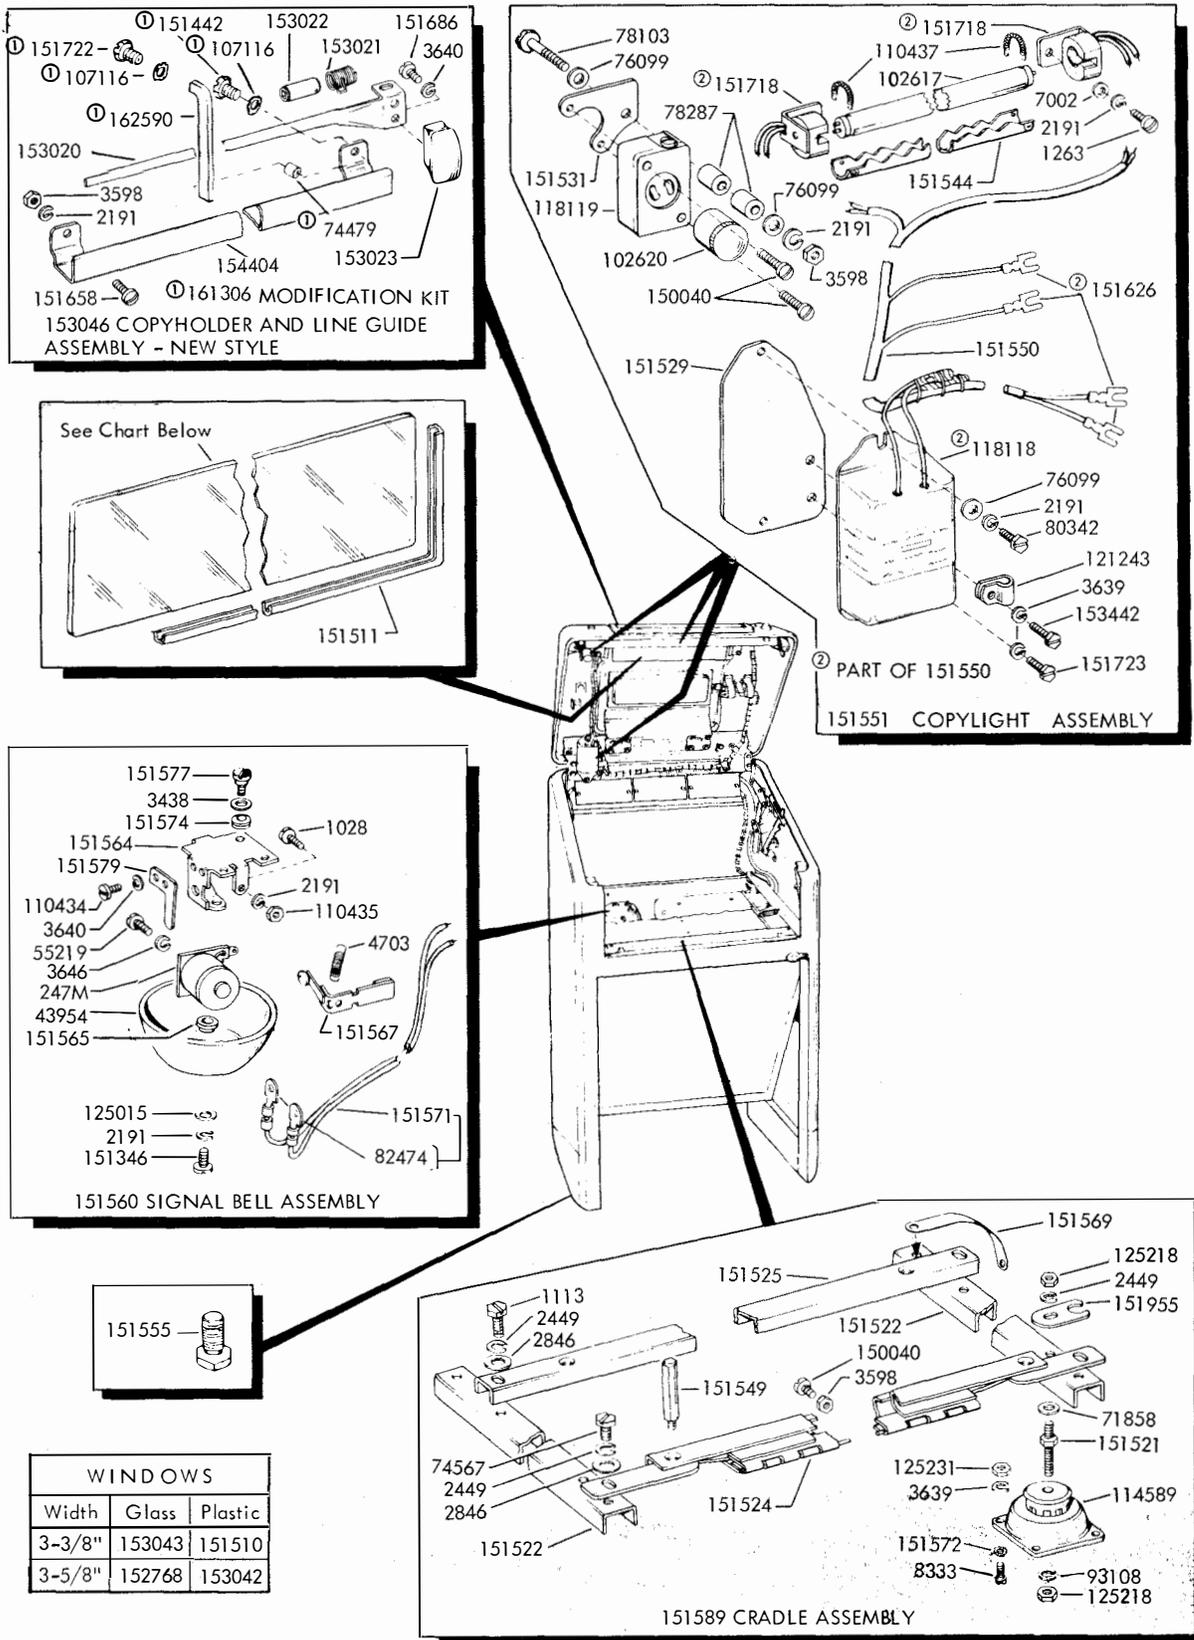


FIGURE 3. CABINET VARIABLE FEATURES


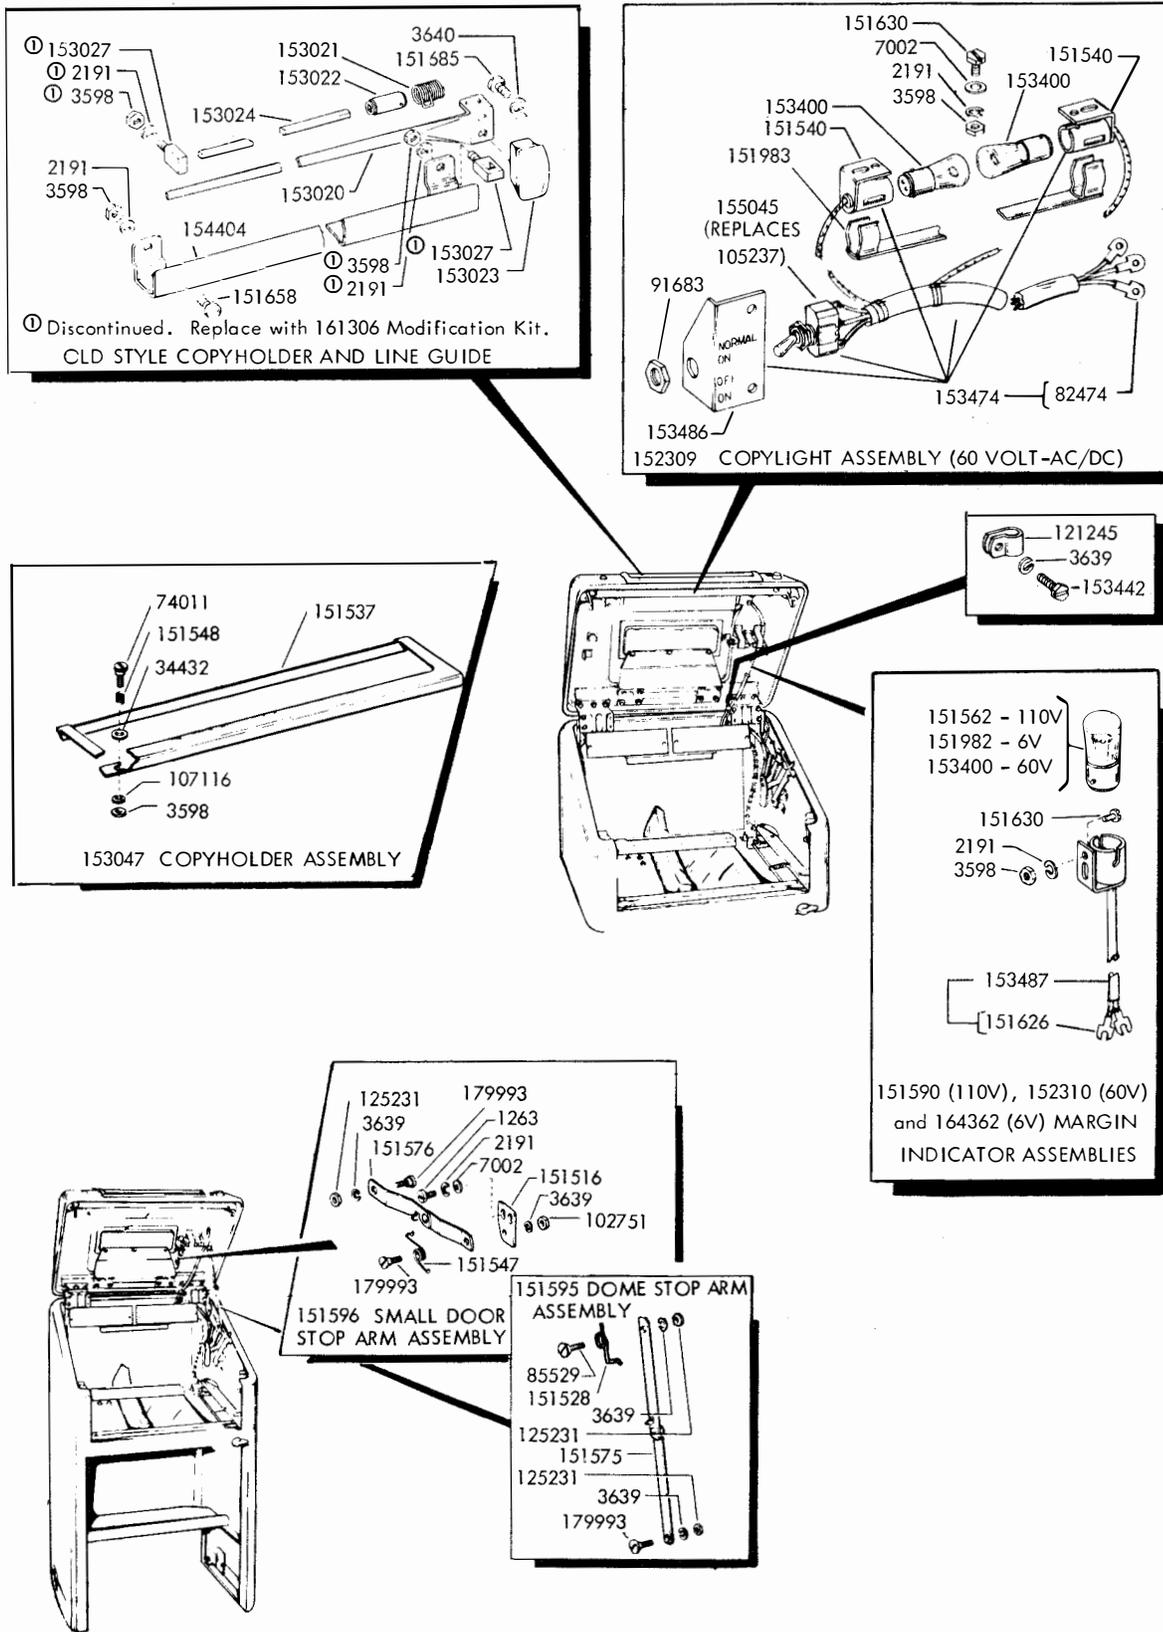


FIGURE 4. CABINET VARIABLE FEATURES

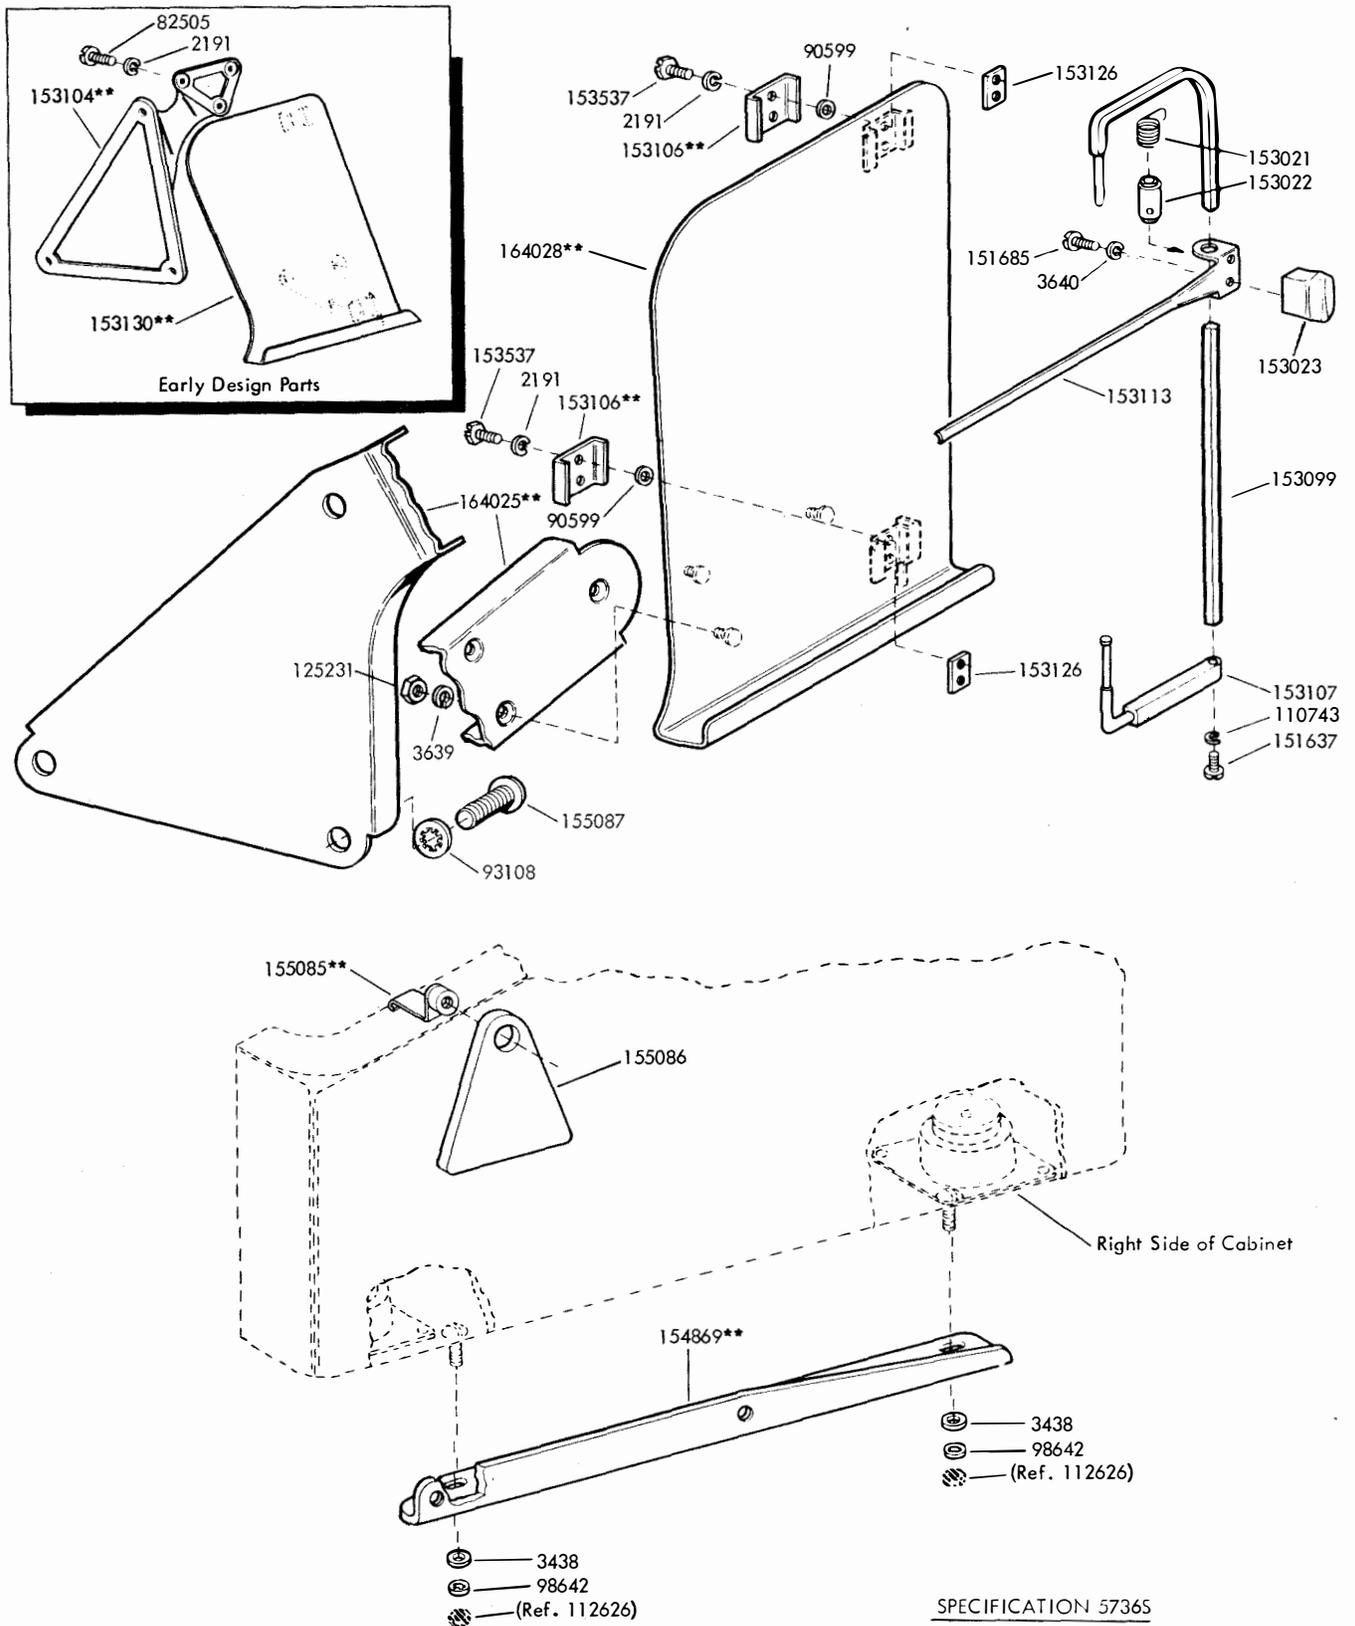

**Refer to Page 1 for Finish Suffix

FIGURE 5. 173400** MODIFICATION KIT TO PROVIDE OFFSET COPYHOLDER (TABLE MODEL)

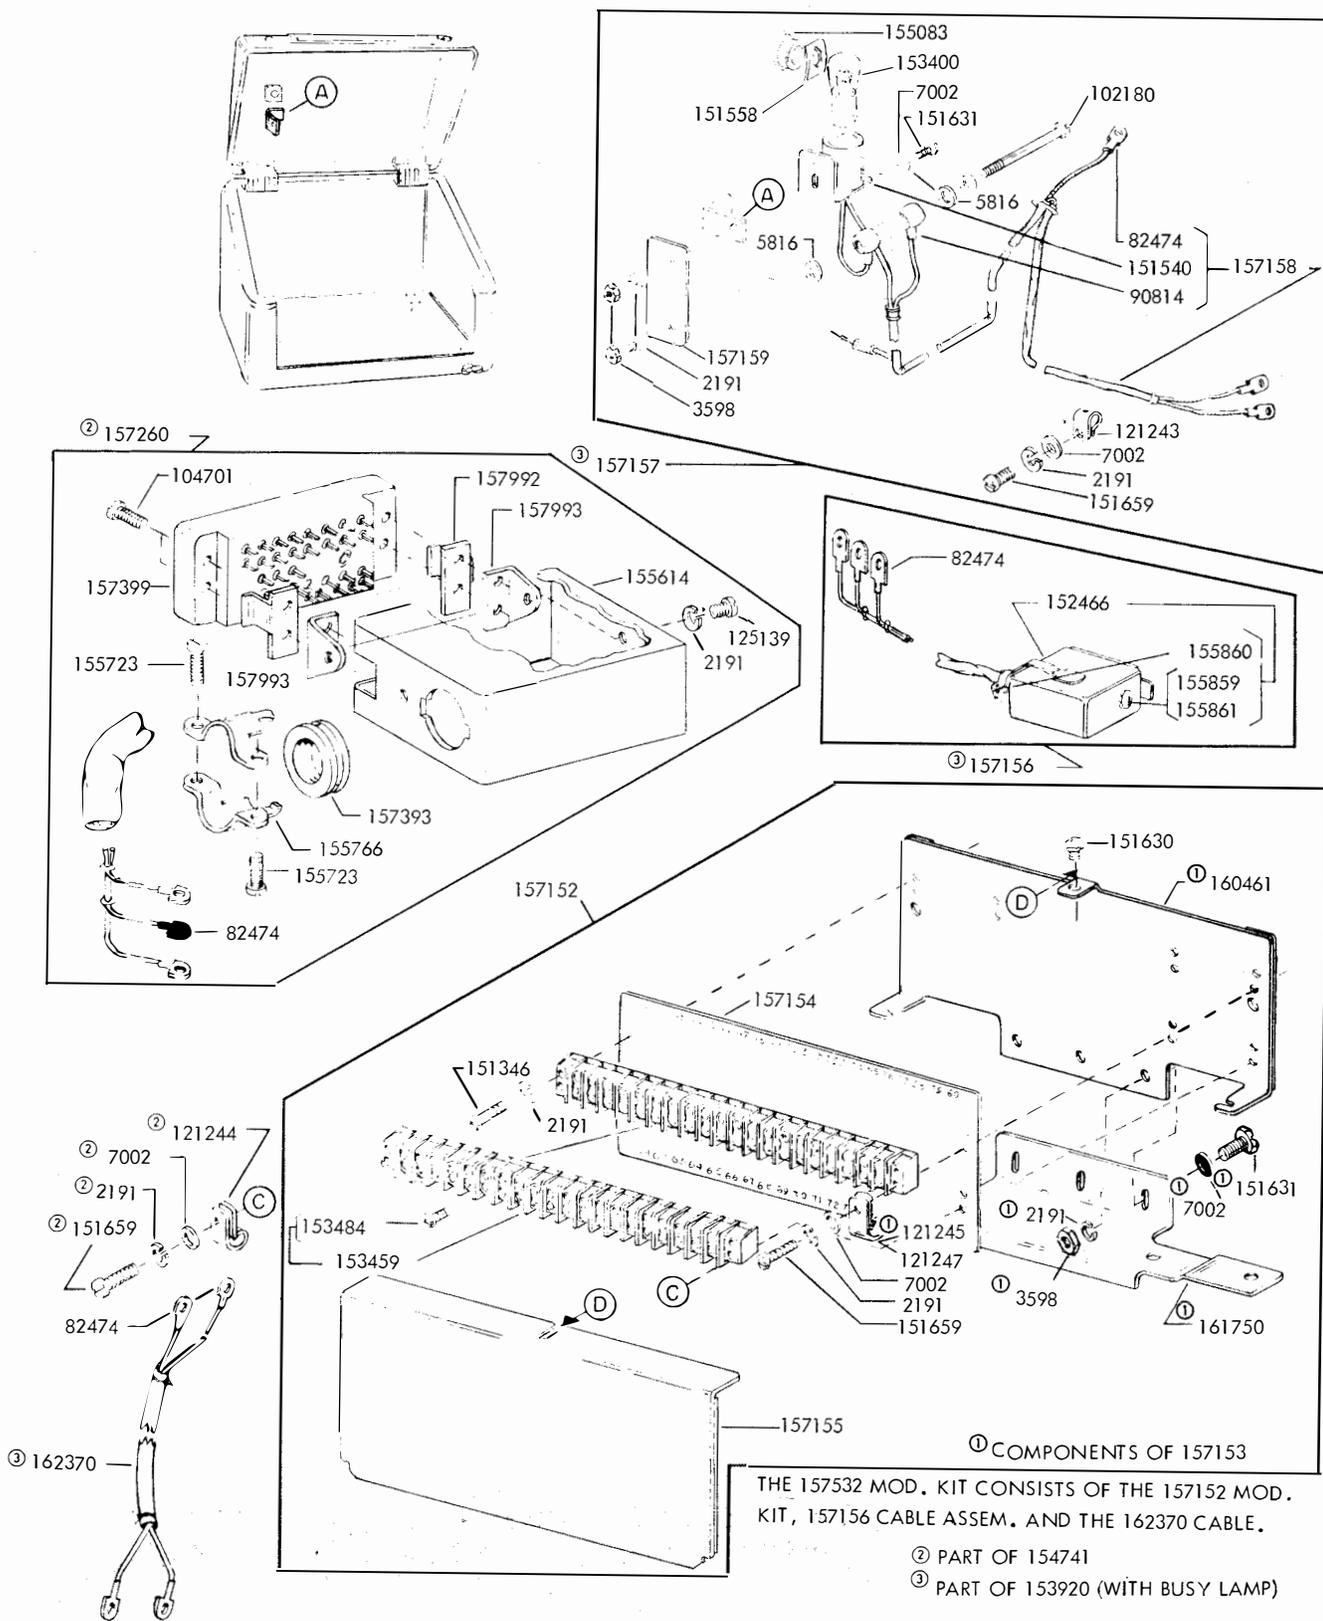


FIGURE 6. 153920 and 154741 MODIFICATION KITS TO ADAPT CABINET FOR SELECTIVE CALLING

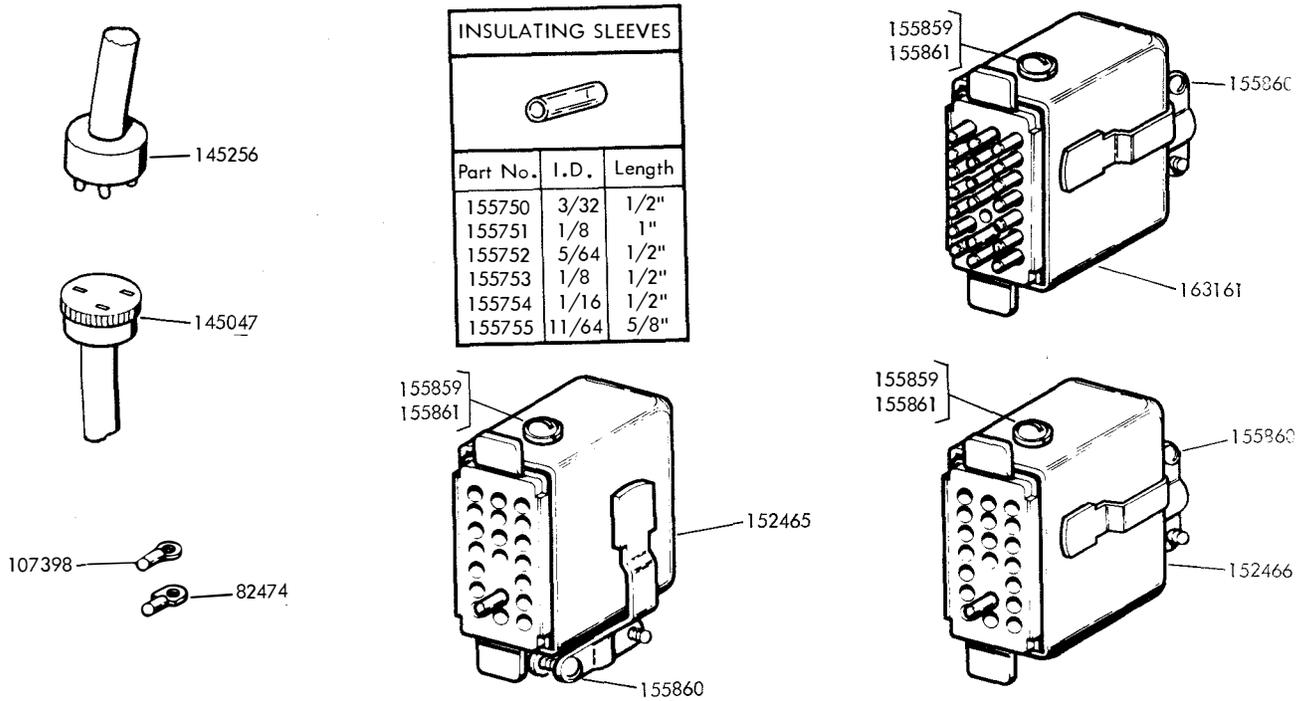


FIGURE 7. CABLE COMPONENTS


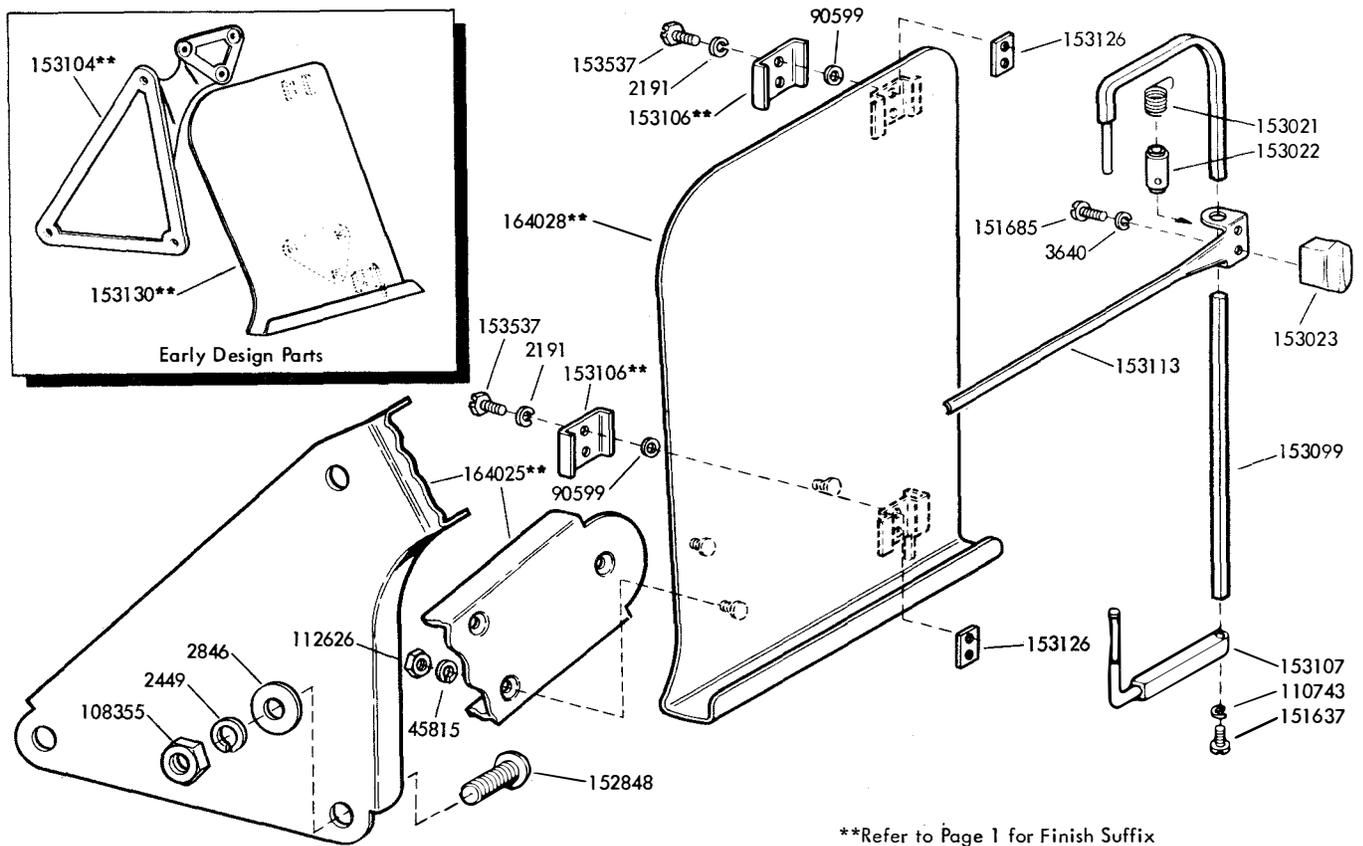



FIGURE 8. 164024** MODIFICATION KIT TO PROVIDE OFFSET COPYHOLDER

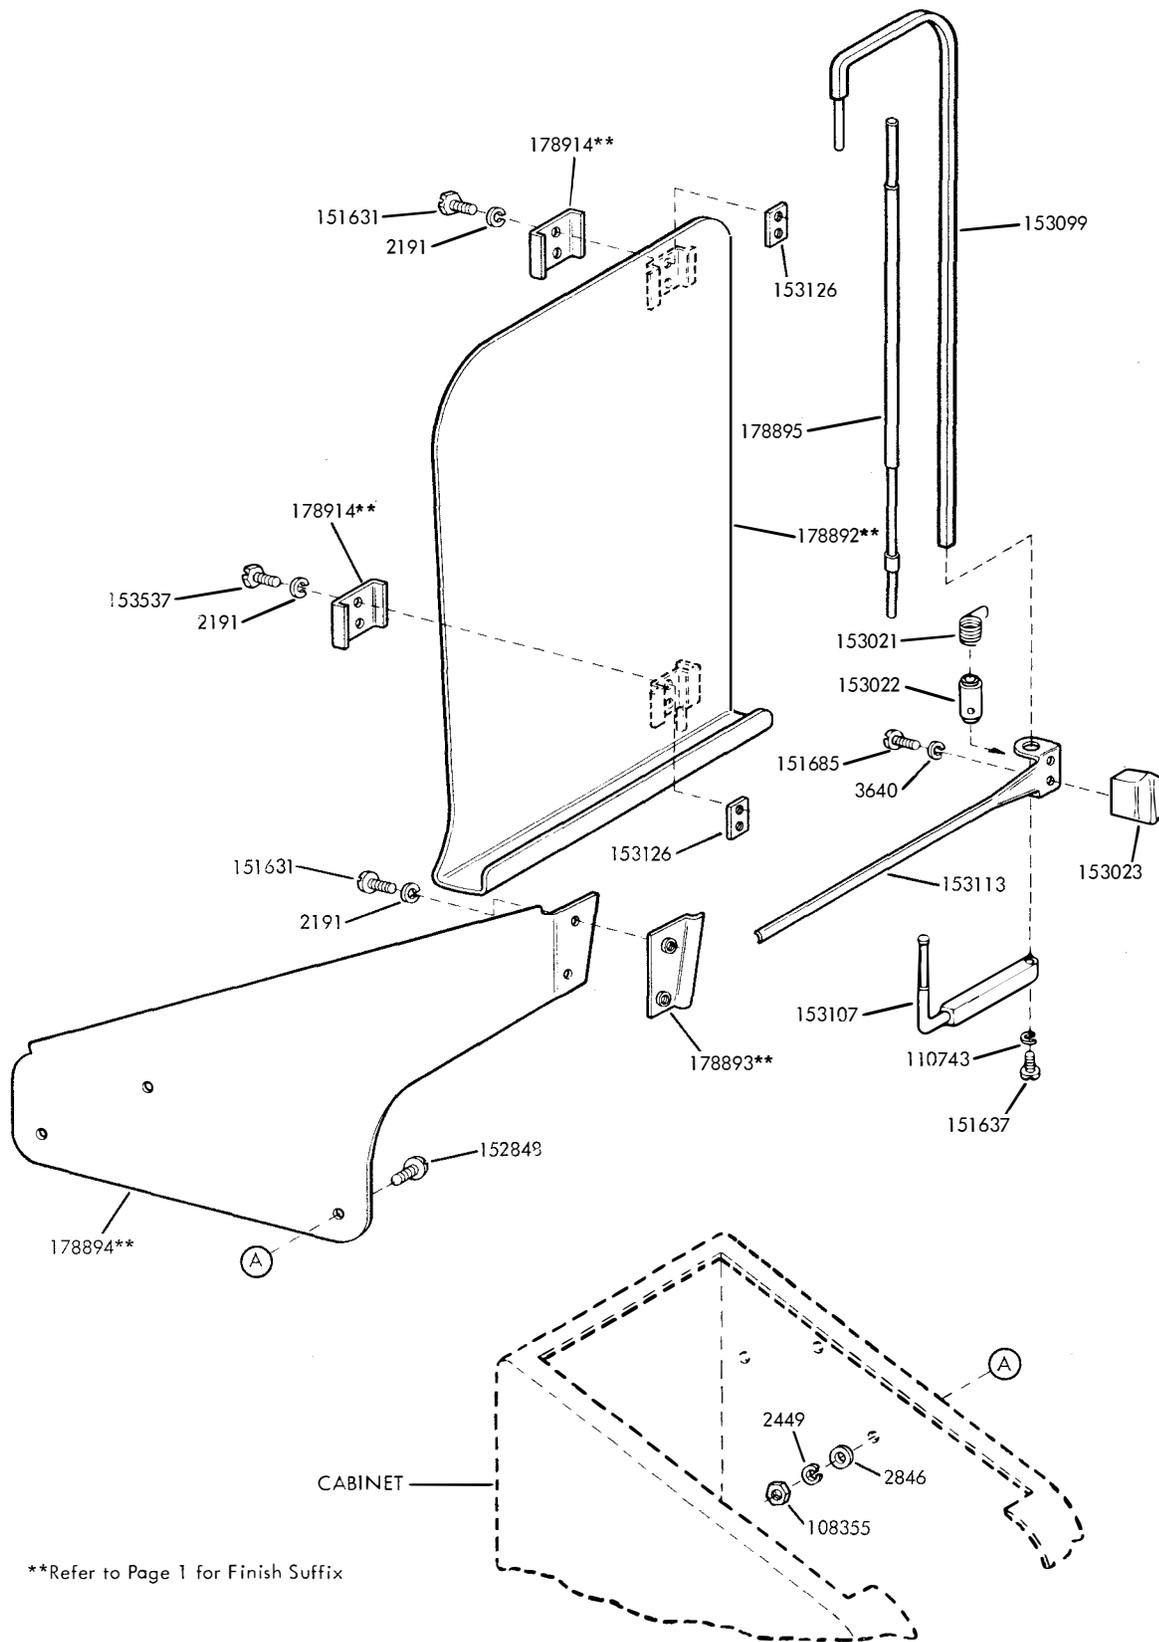

**Refer to Page 1 for Finish Suffix

FIGURE 9. 178897** MODIFICATION KIT TO PROVIDE OFFSET COPYHOLDER

FIGURE 10. 159357 (5.5 VOLT, AC) and 165668 (48 VOLT, DC) MODIFICATION KITS TO PROVIDE A COPYLIGHT SYSTEM

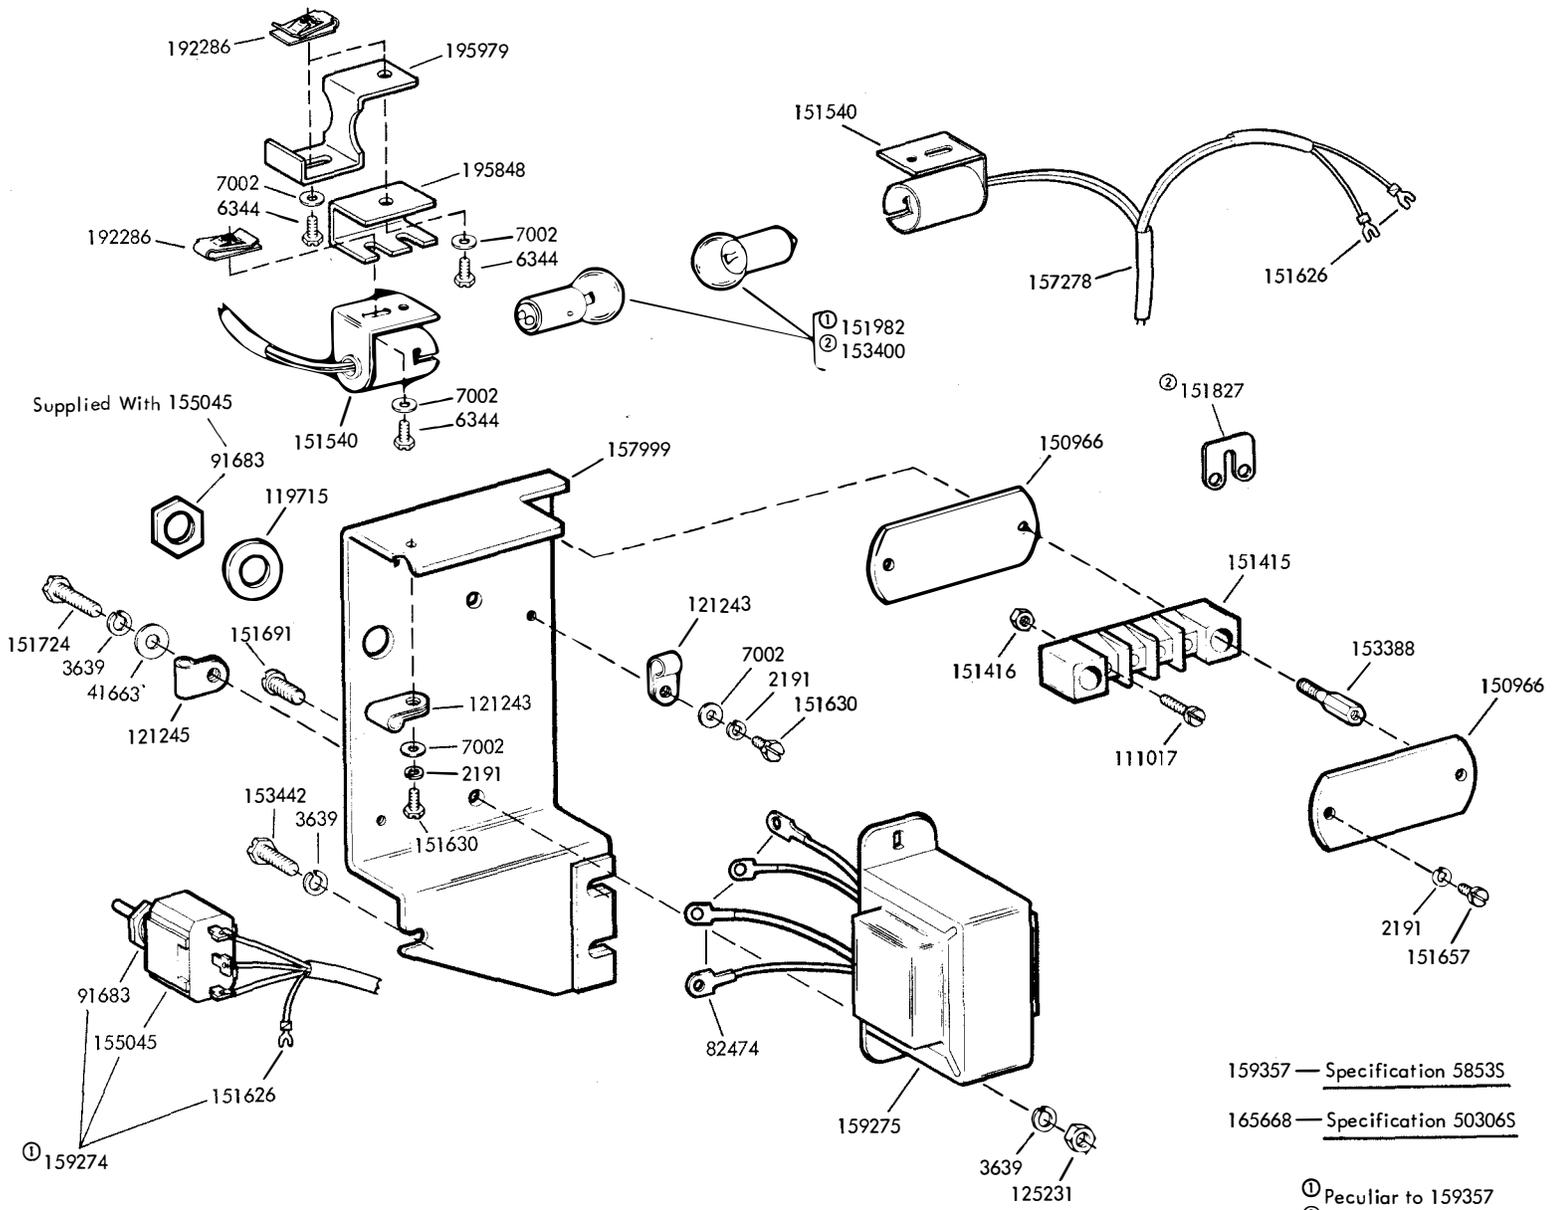



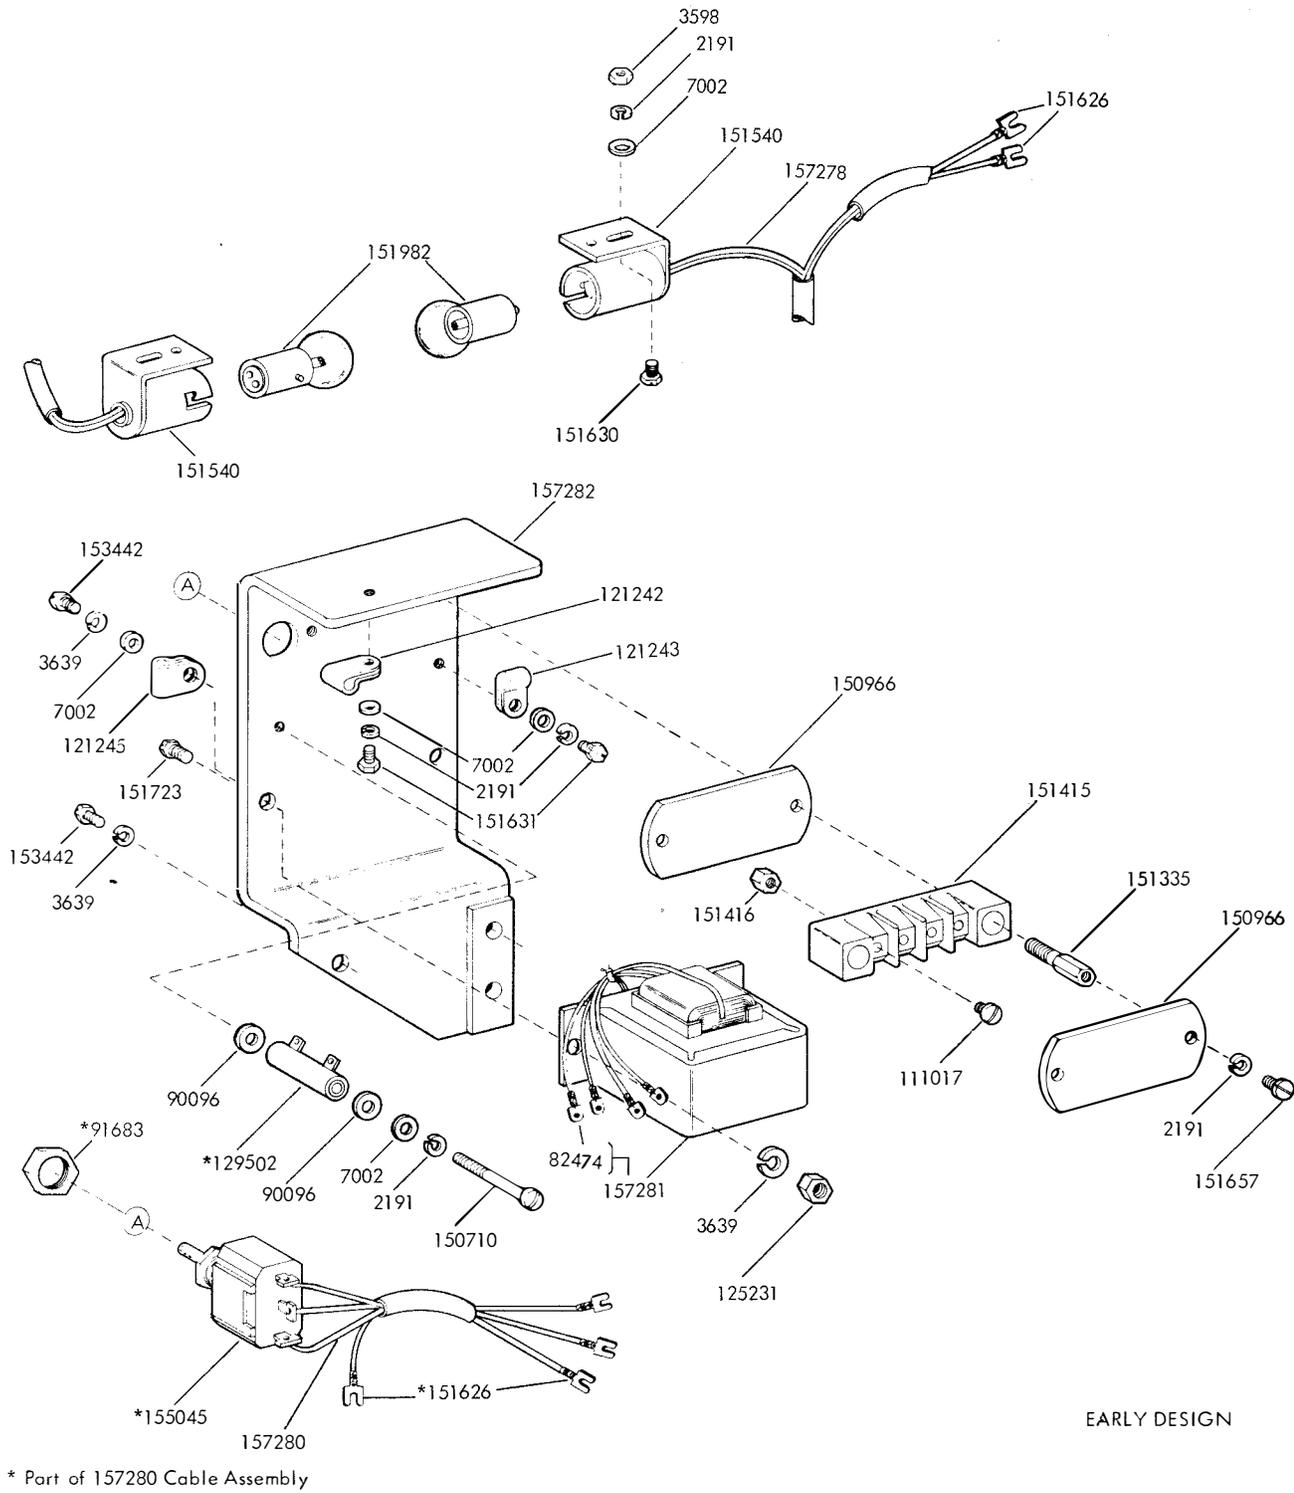


FIGURE 11. INCANDESCENT COPYLIGHT SYSTEM (6 VOLT, AC)

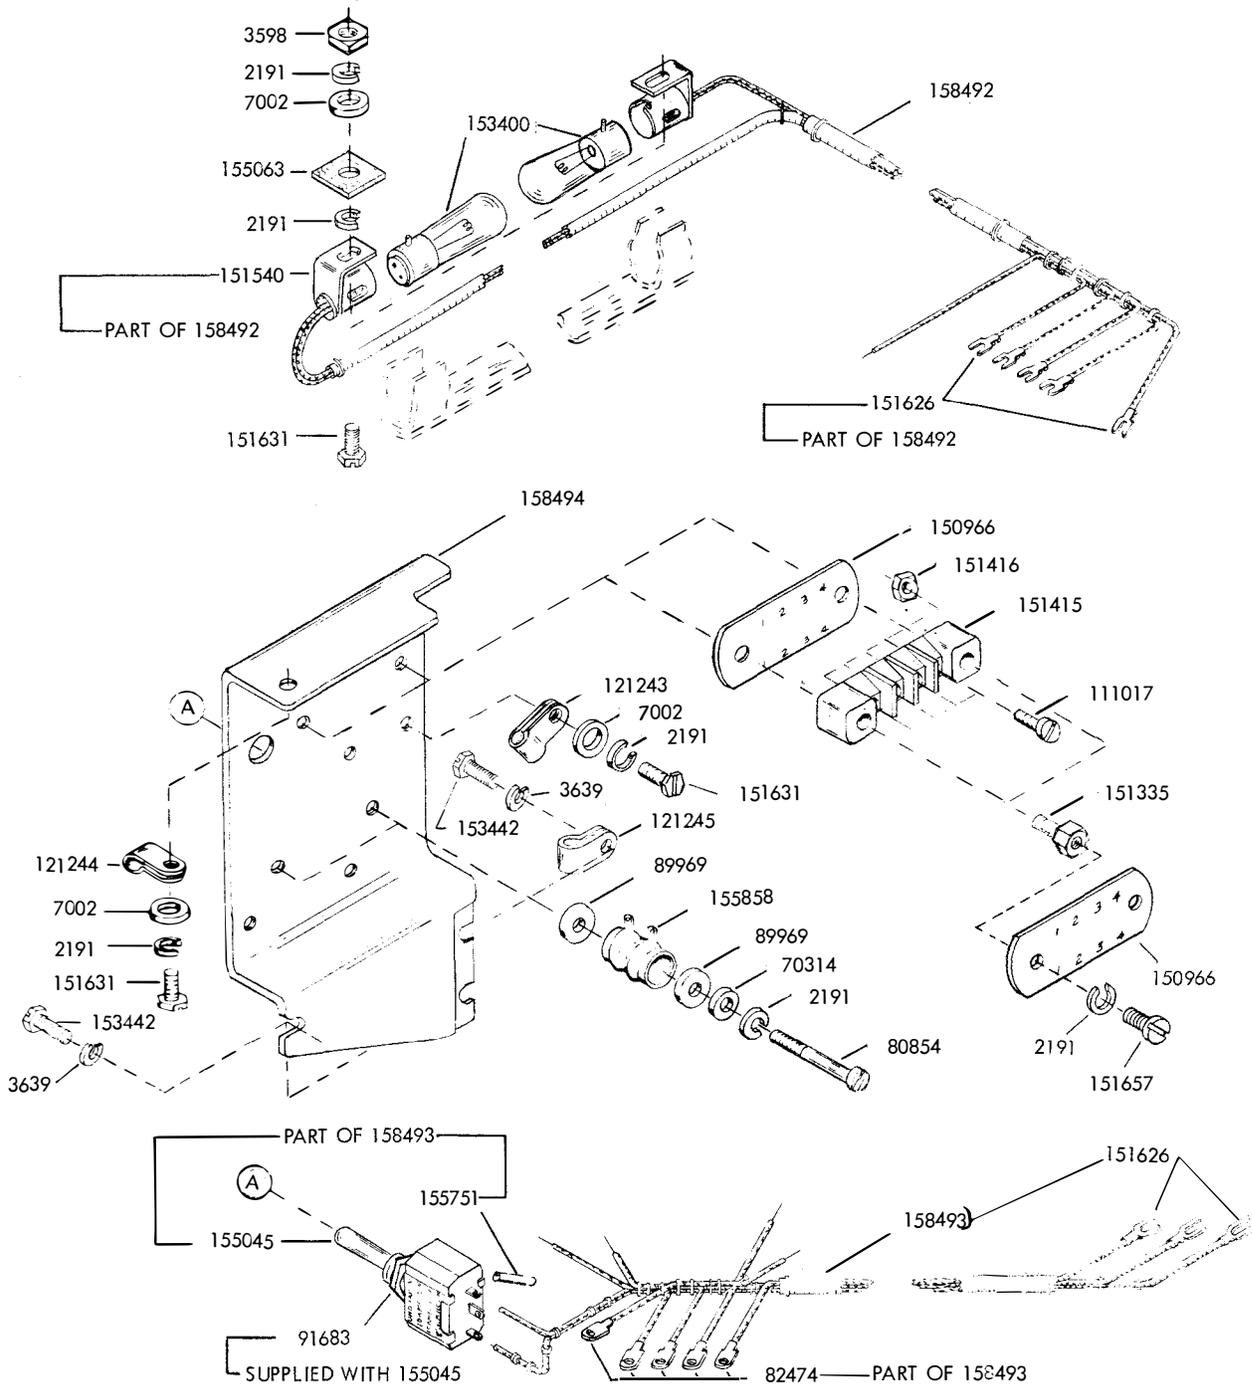


SPECIFICATION 58535

FIGURE 12. 154777 MCDIFICATION KIT TO PROVIDE 60 VOLT, DC INCANDESCENT COPYLIGHT SYSTEM

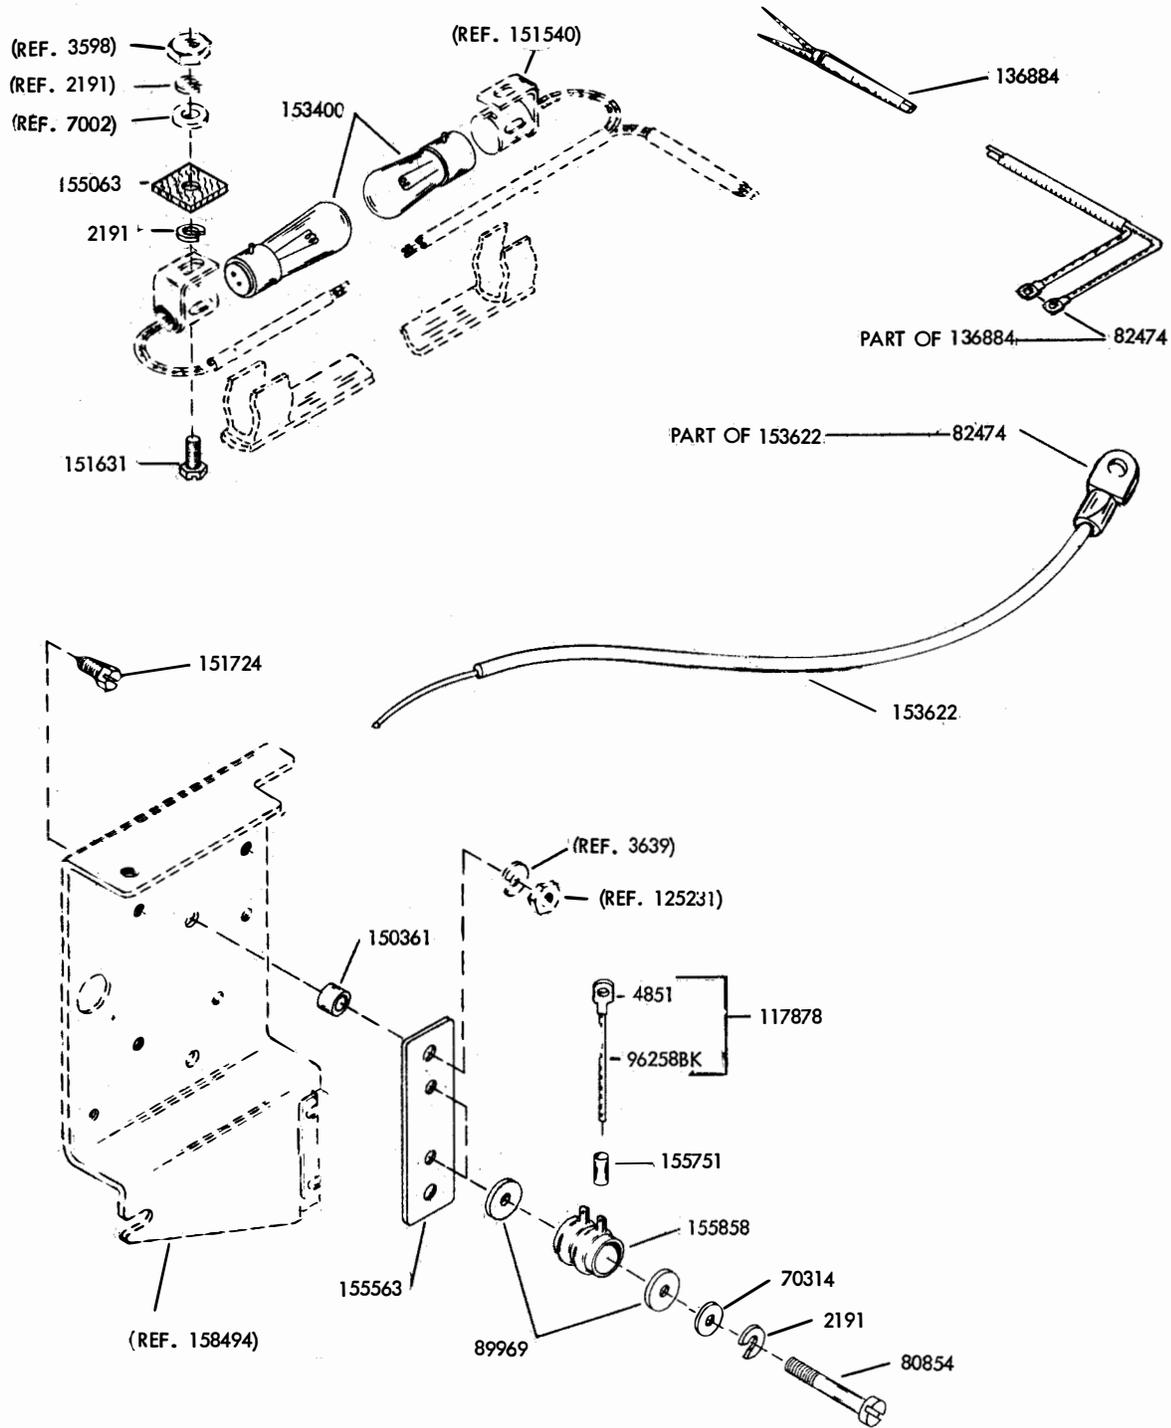


SPECIFICATION 58535

FIGURE 13. 159375 MODIFICATION KIT TO CONVERT AN AC COPYLIGHT SYSTEM TO A 60 VOLT, DC COPYLIGHT SYSTEM

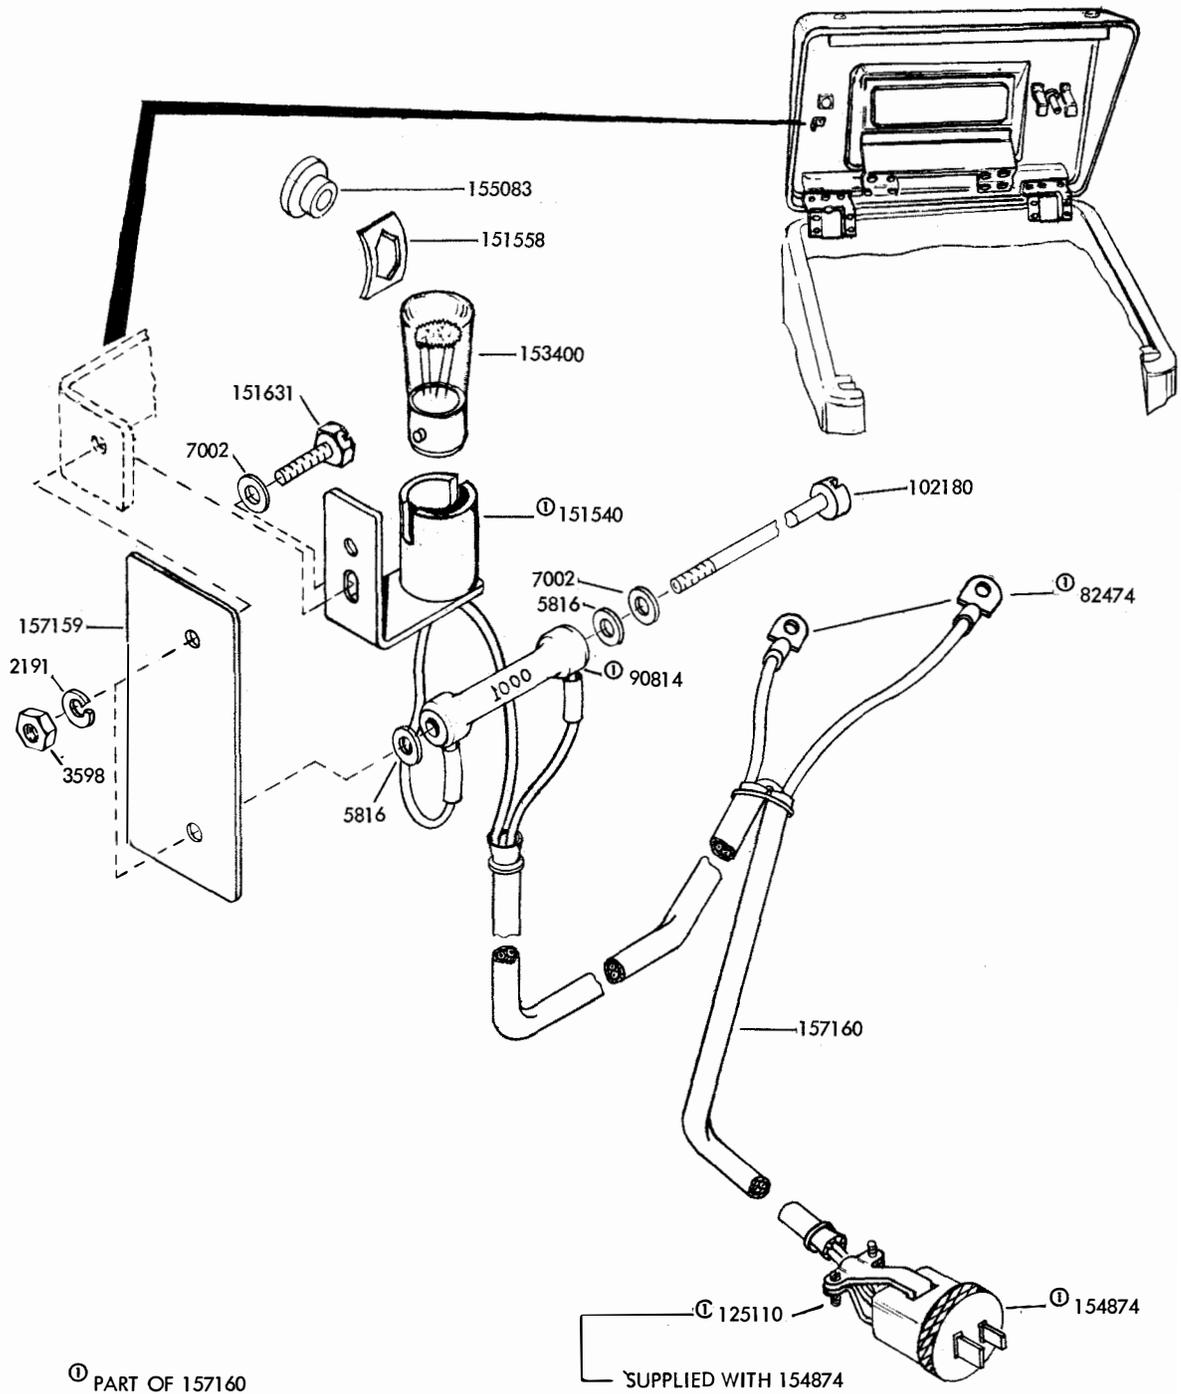


SPECIFICATION 5821S

FIGURE 14. 152902 MODIFICATION KIT TO EQUIP CABINET WITH BUSY LINE LIGHT

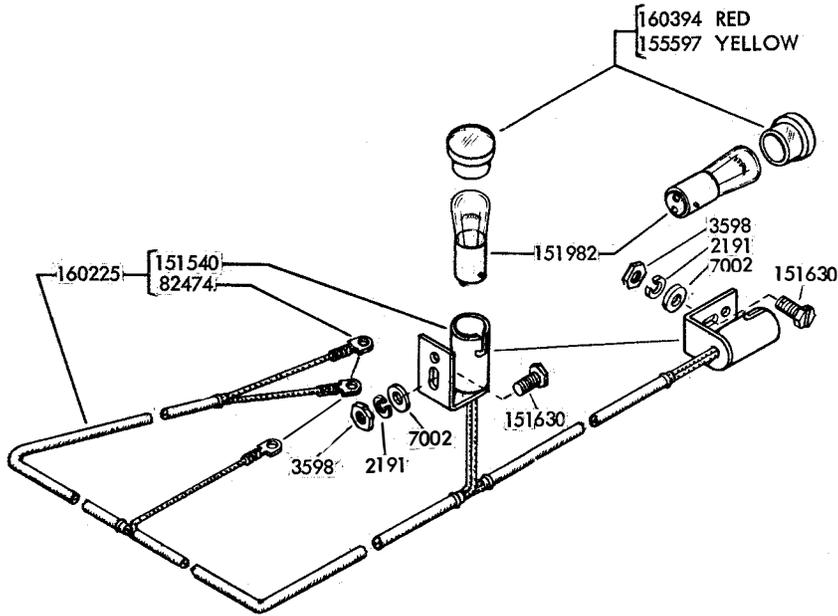

SPECIFICATION 58795

FIGURE 15. 160224 MODIFICATION KIT TO ADD OPEN AND BUSY LINE INDICATOR LIGHTS

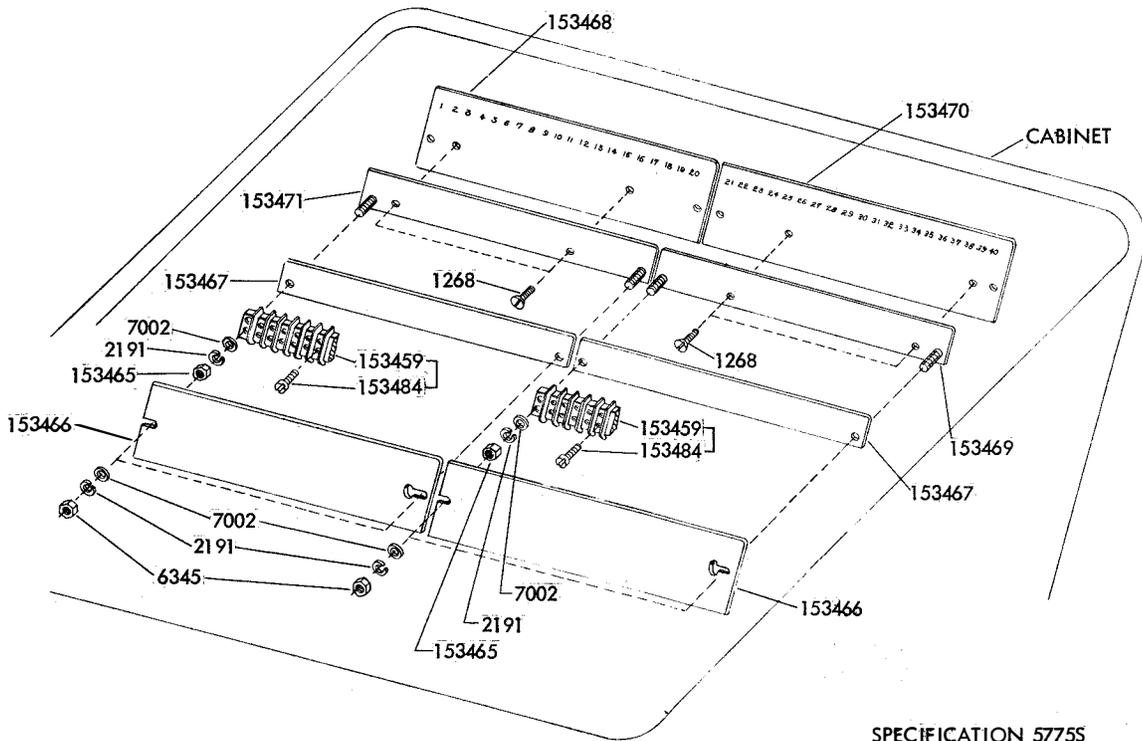

SPECIFICATION 57755

FIGURE 16. 152319 MODIFICATION KIT TO PROVIDE TERMINAL CONNECTIONS ON CABINET

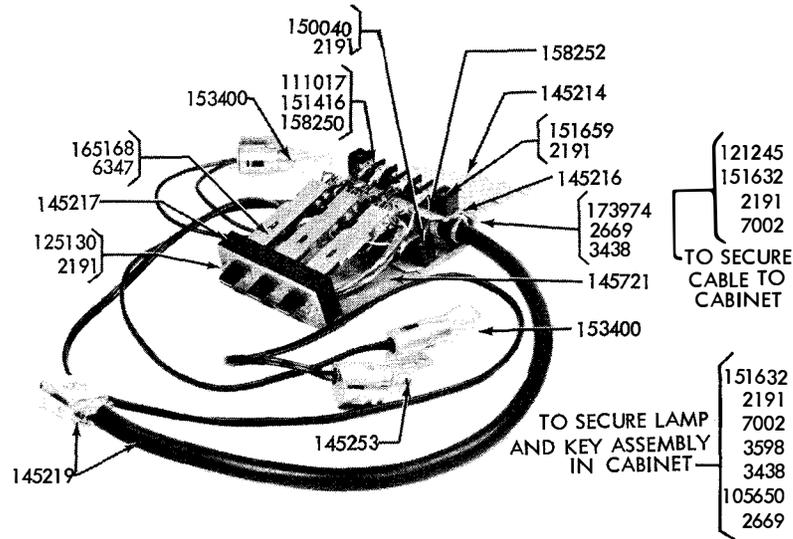


FIGURE 17. 144600 KEY AND LAMP ASSEMBLY (W/TYPING UNIT INTERCHANGE)

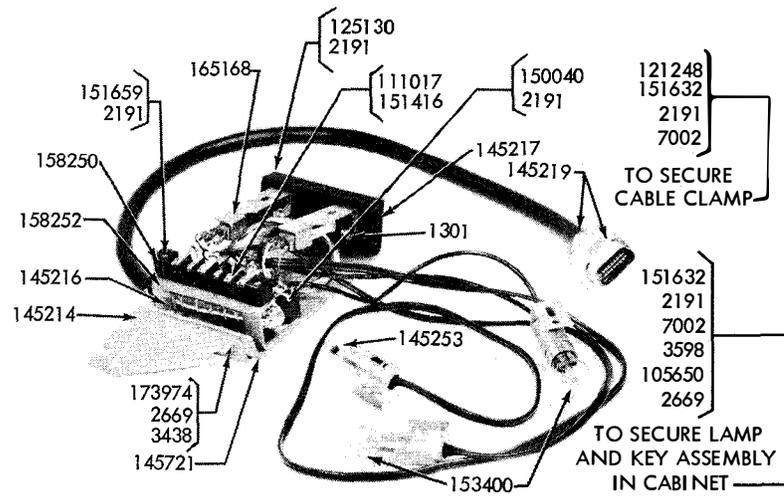


FIGURE 18. 145220 KEY AND LAMP ASSEMBLY (W/O TYPING UNIT INTERCHANGE)

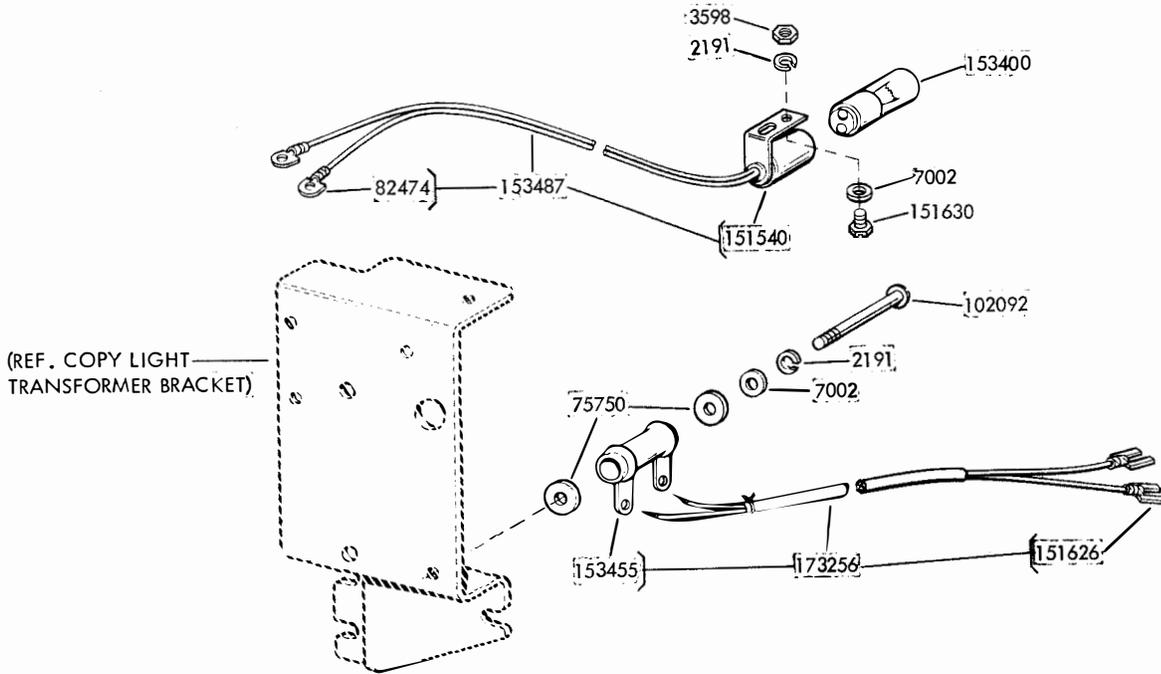


FIGURE 19. 173238 MODIFICATION KIT TO ADD READER LIGHT TO CABINET


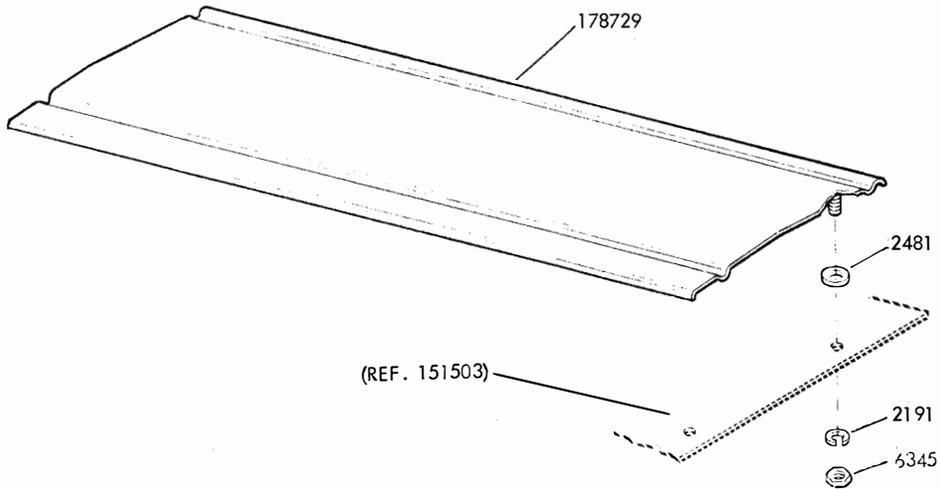


FIGURE 20. 174453 MODIFICATION KIT TO PROVIDE CABINET WITH A PAPER TEARING PLATE

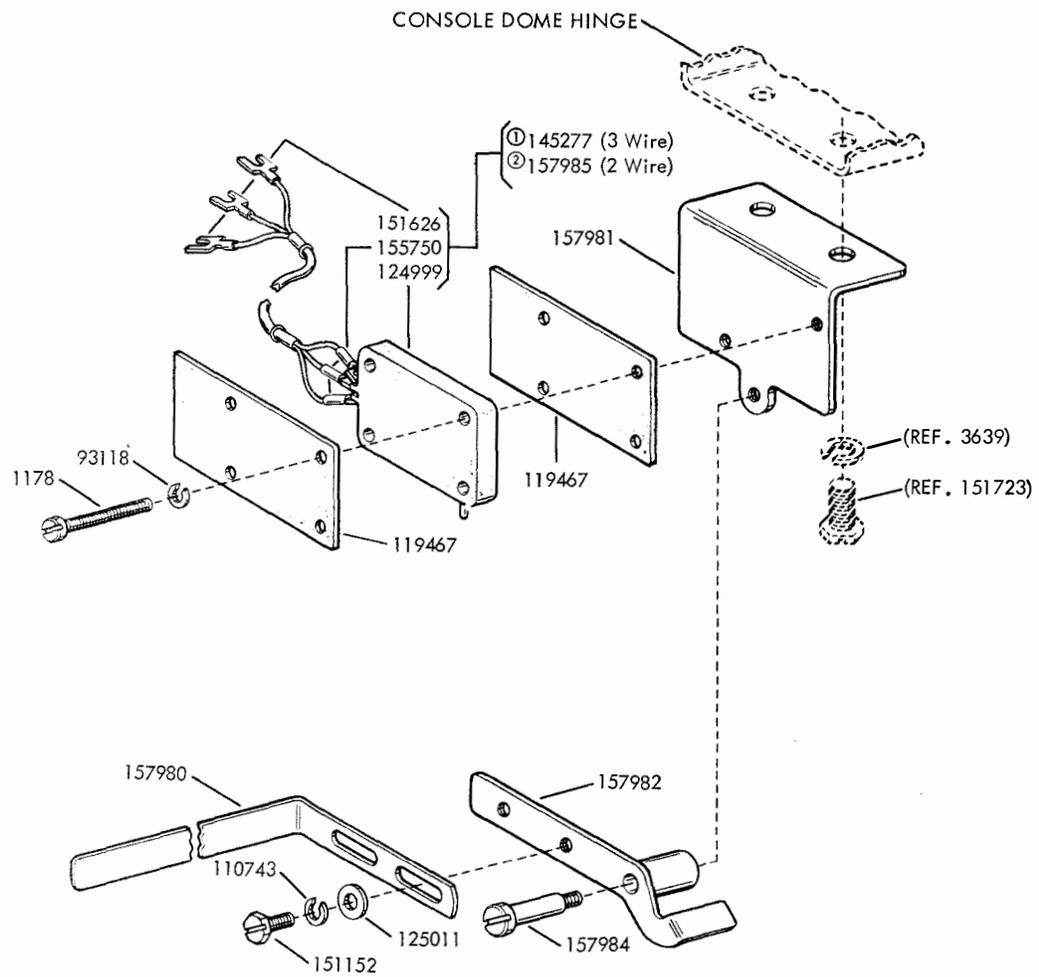

- ① PECULIAR TO 145278 MODIFICATION KIT
- ② PECULIAR TO 154756 MODIFICATION KIT

FIGURE 21. 145278 and 154756 MODIFICATION KITS TO ADD FORM-CUT ALARM MECHANISM

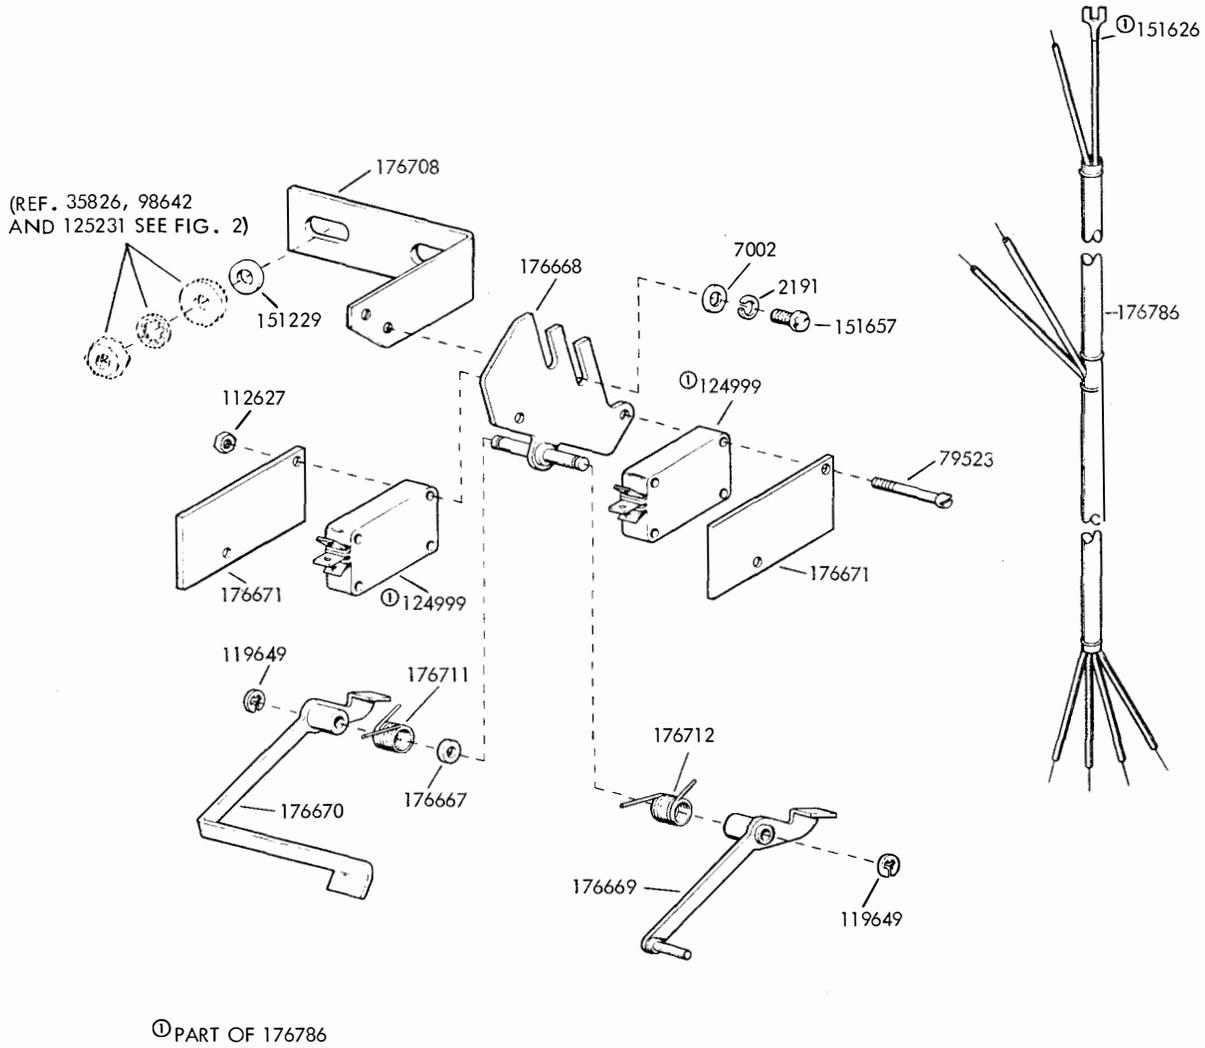


FIGURE 22. 176714 MODIFICATION KIT TO PROVIDE LOW-PAPER and PAPER-OUT ALARM



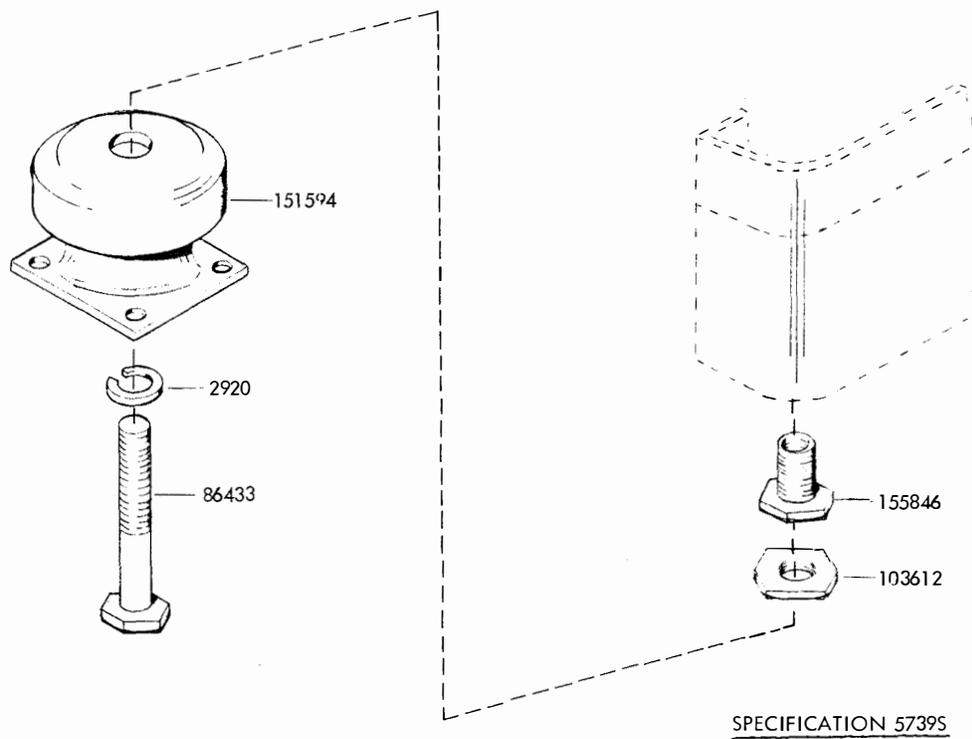


FIGURE 23. 154793 MODIFICATION KIT TO ADD SHOCK MOUNTS TO CONSOLE CABINET

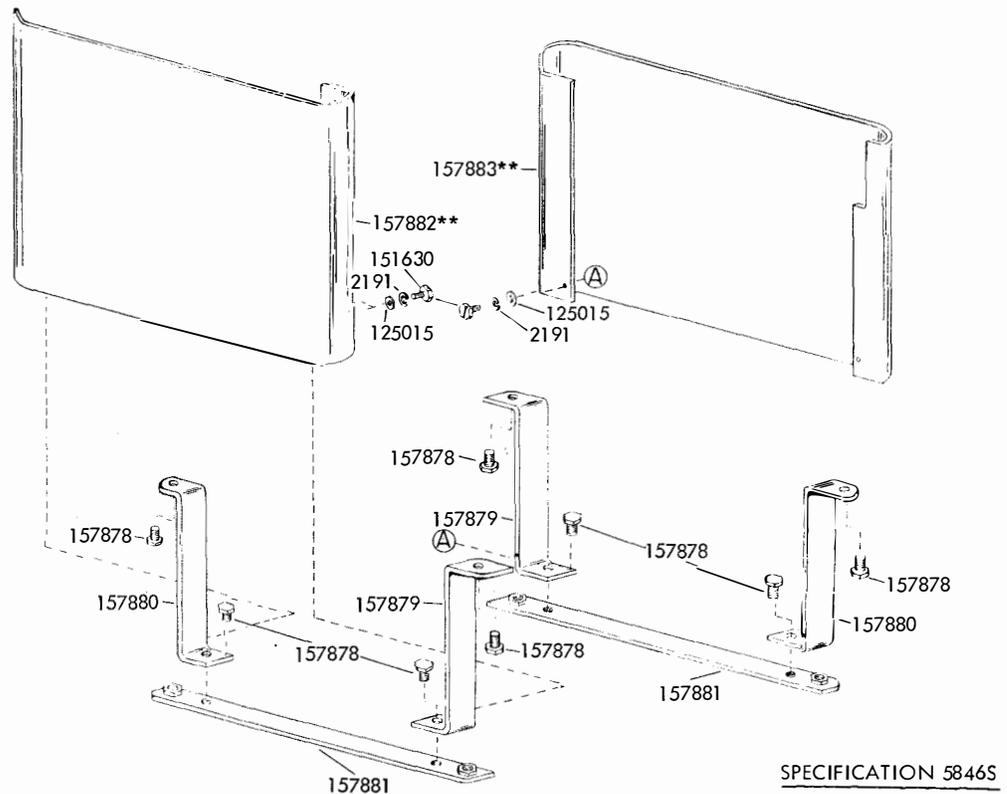


**Refer to Page 1 for Finish Suffix

FIGURE 24. 154754** MODIFICATION KIT TO PROVIDE SUB-BASE FOR CONSOLE CABINET FOR STAND-UP OPERATION

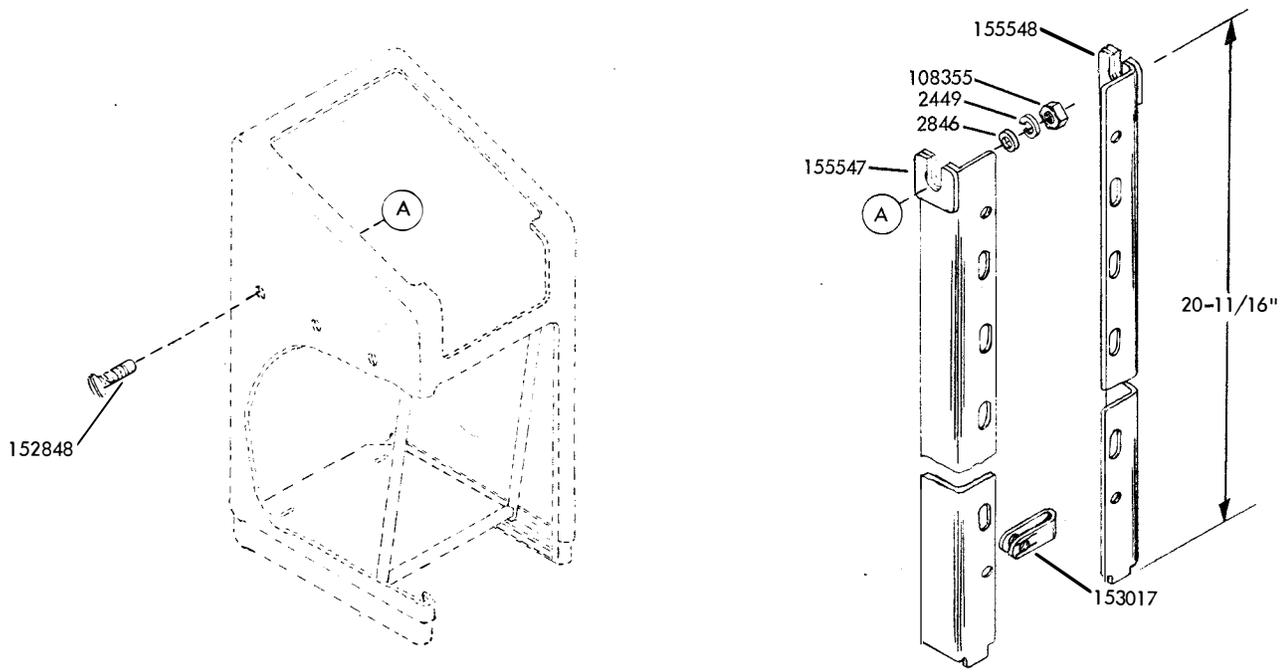


SPECIFICATION 57305

FIGURE 25. 159373 MODIFICATION KIT TO PROVIDE AN APPARATUS MOUNTING RACK

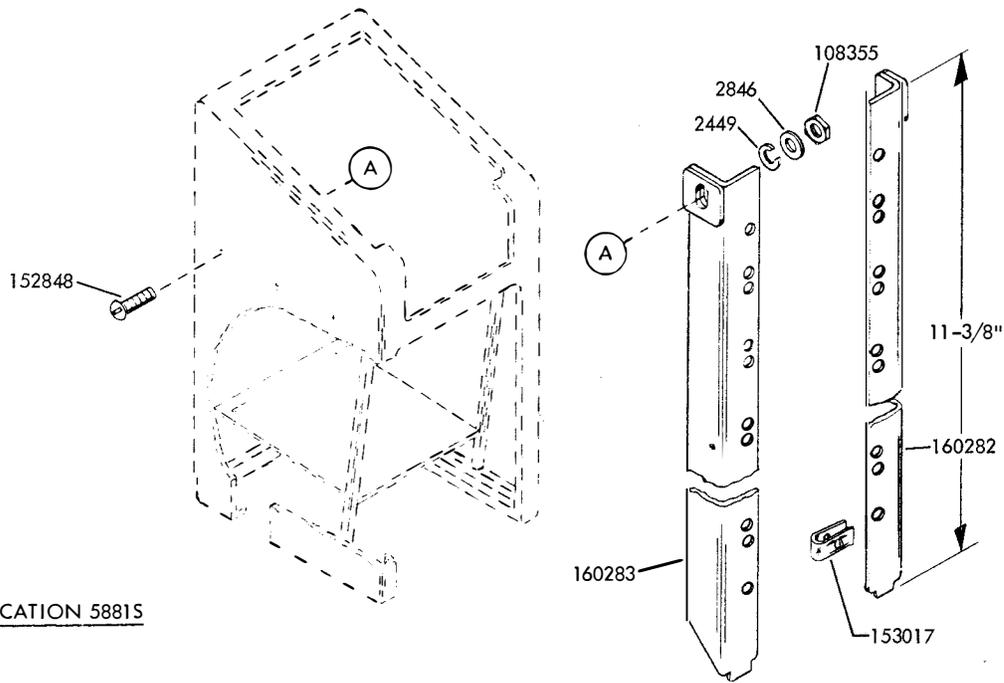


SPECIFICATION 58815

FIGURE 26. 159390 MODIFICATION KIT TO PROVIDE AN APPARATUS MOUNTING RACK

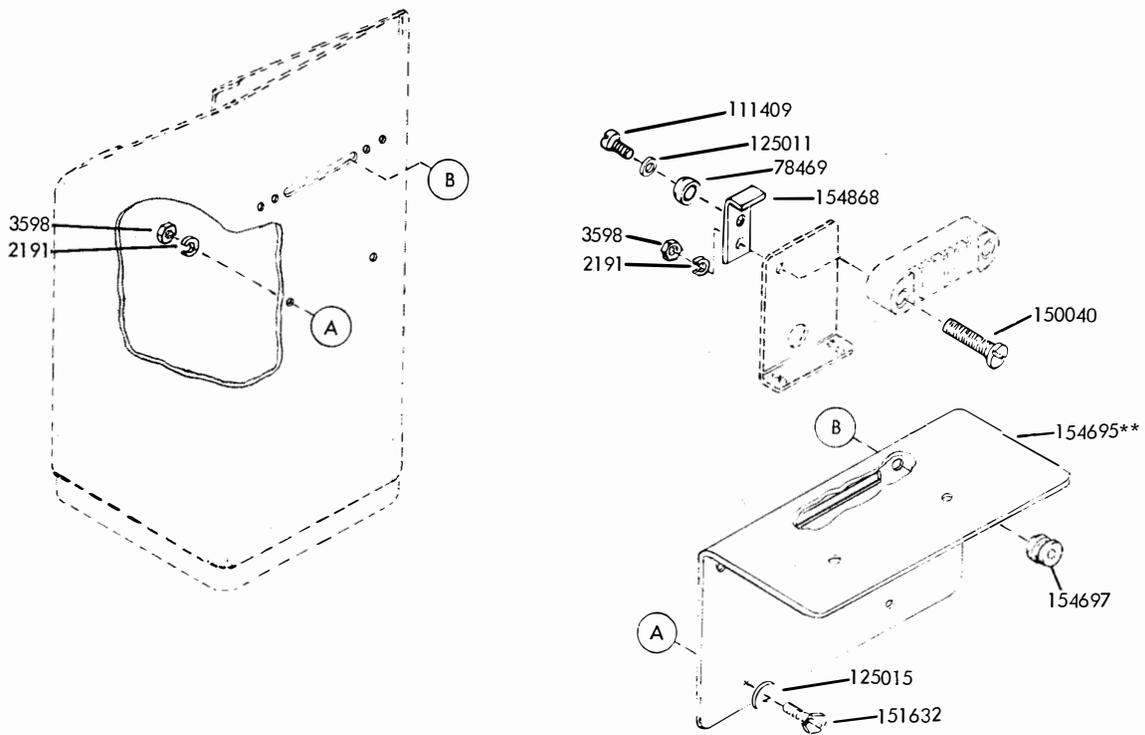


SPECIFICATION 58055

FIGURE 28. 153901** MODIFICATION KIT TO PROVIDE PAPER WINDER MOUNTING BRACKET

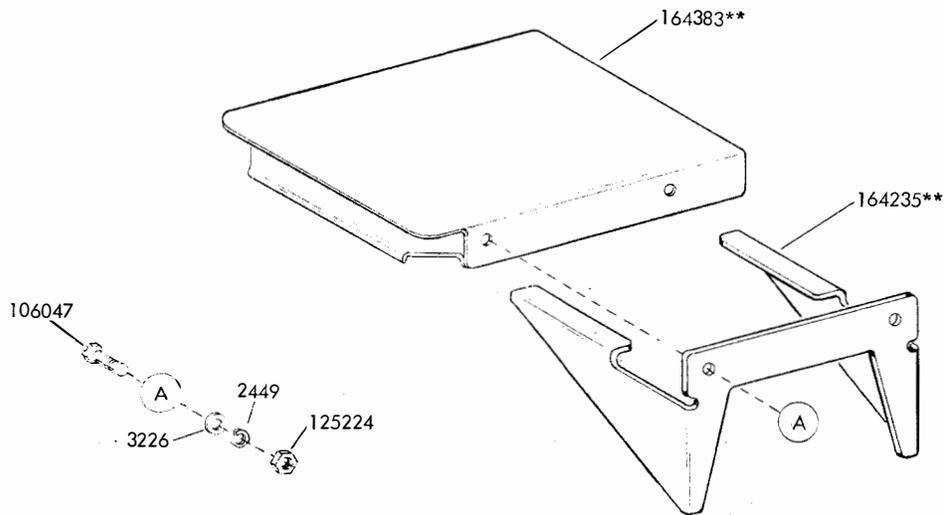

**Refer to Page 1 for Finish Suffix

FIGURE 29. 163796** MODIFICATION KIT TO PROVIDE TELEPHONE SHELF FOR CONSOLE CABINET

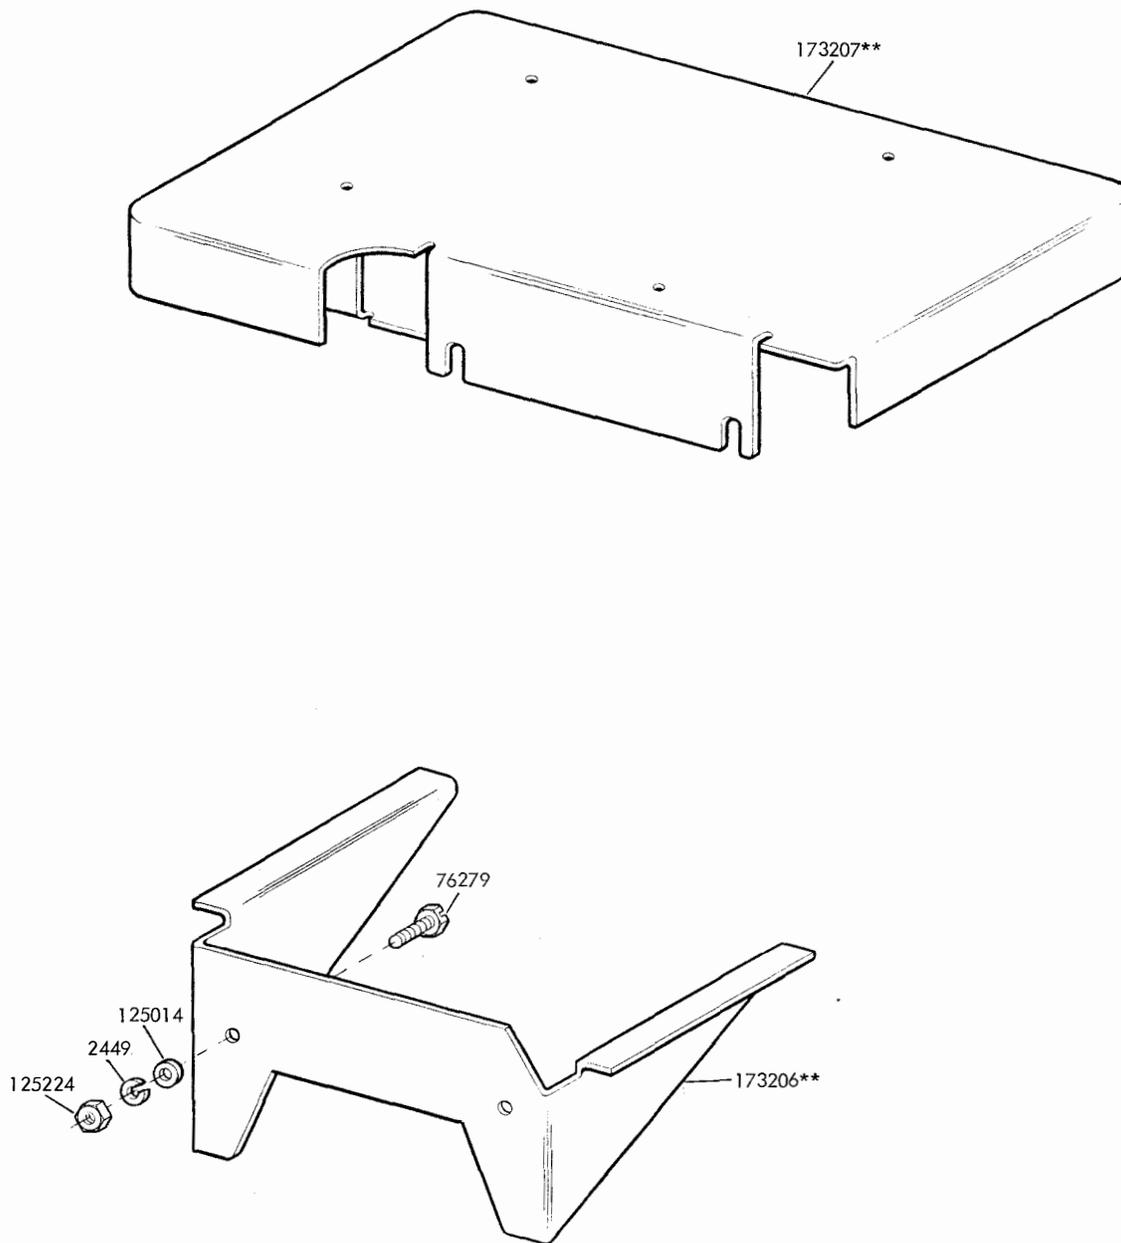

**Refer to Page 1 for Finish Suffix

FIGURE 30. 173097** MODIFICATION KIT TO PROVIDE SHELF FOR CONSOLE CABINET

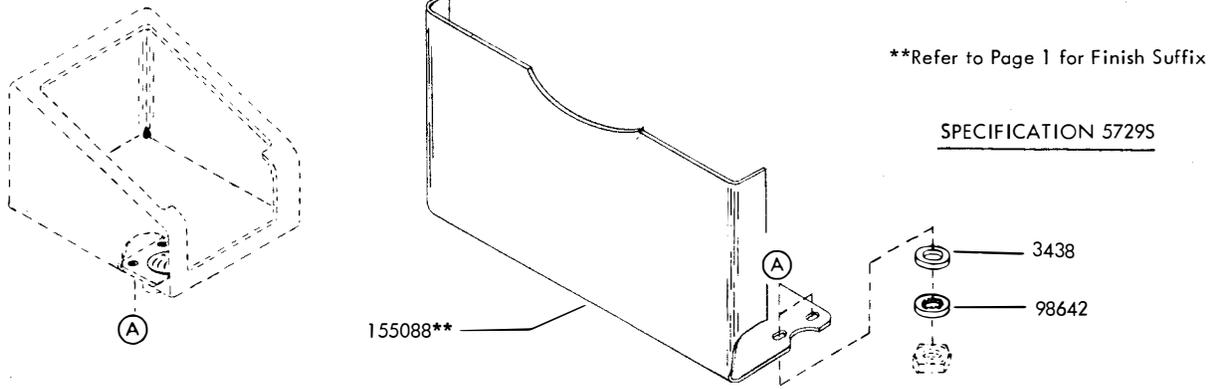


FIGURE 31. 152300** MODIFICATION KIT TO PROVIDE DIRECTORY HOLDER FOR TABLE MODEL CABINET

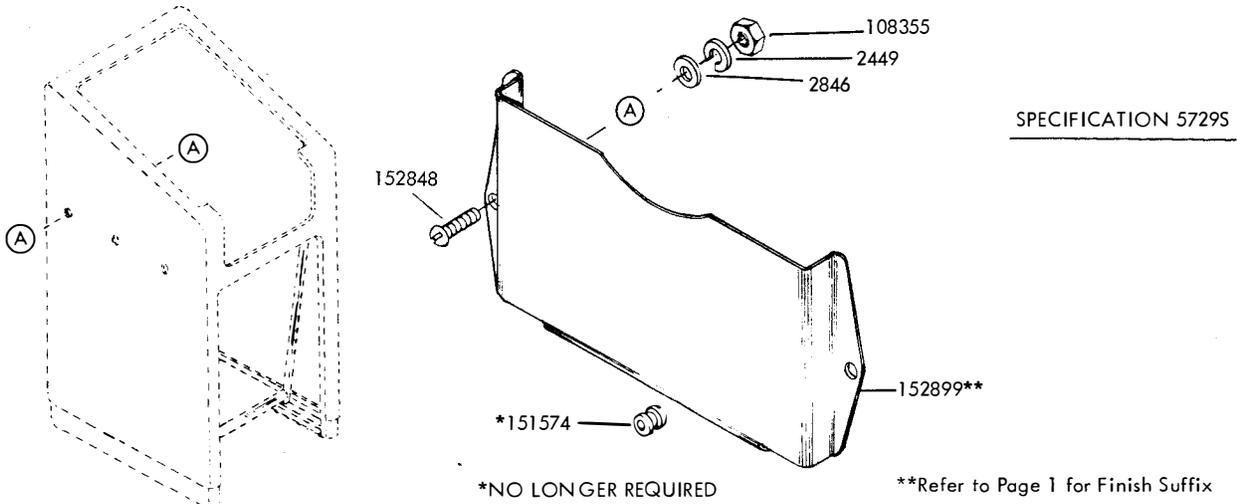


FIGURE 32. 152910** MODIFICATION KIT TO PROVIDE DIRECTORY HOLDER FOR CONSOLE MODEL CABINET

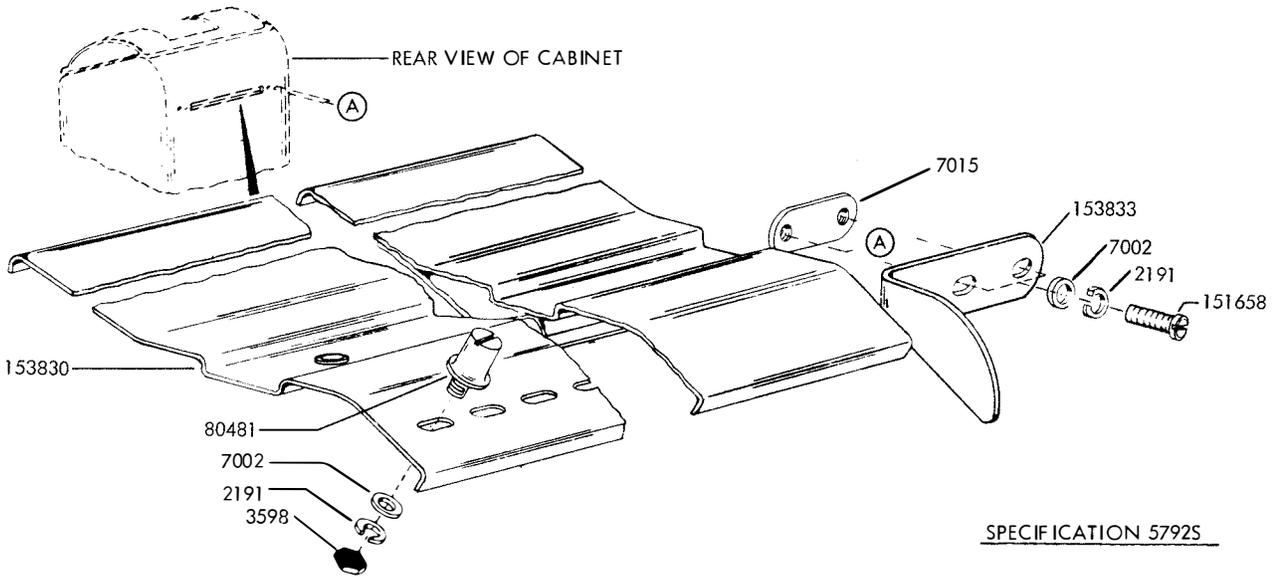


FIGURE 33. 153926 MODIFICATION KIT TO PROVIDE SPROCKET FEED REAR PAPER GUIDE

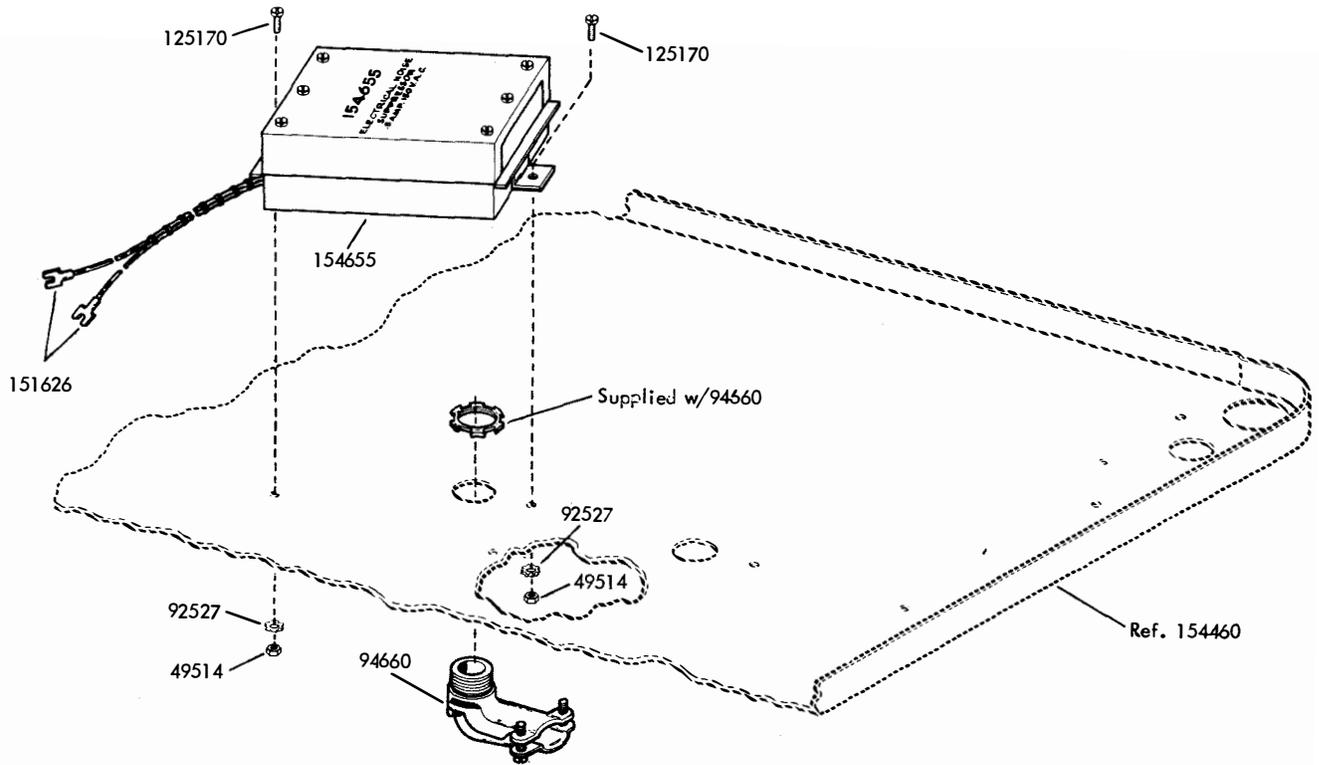


FIGURE 34. 154651 MODIFICATION KIT TO ADD SIGNAL LINE ELECTRICAL NOISE SUPPRESSOR (DC)

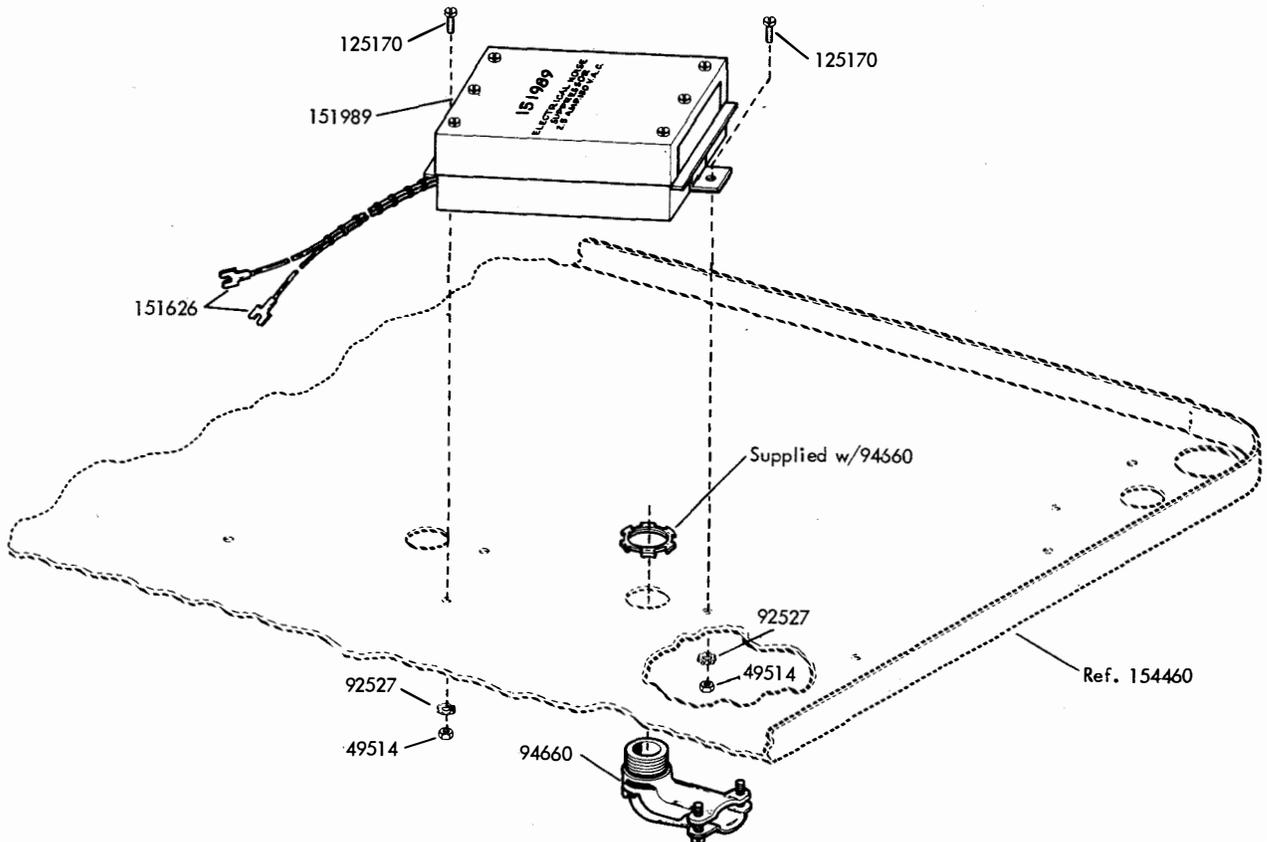


FIGURE 35. 151988 MODIFICATION KIT TO ADD POWER LINE ELECTRICAL NOISE SUPPRESSOR


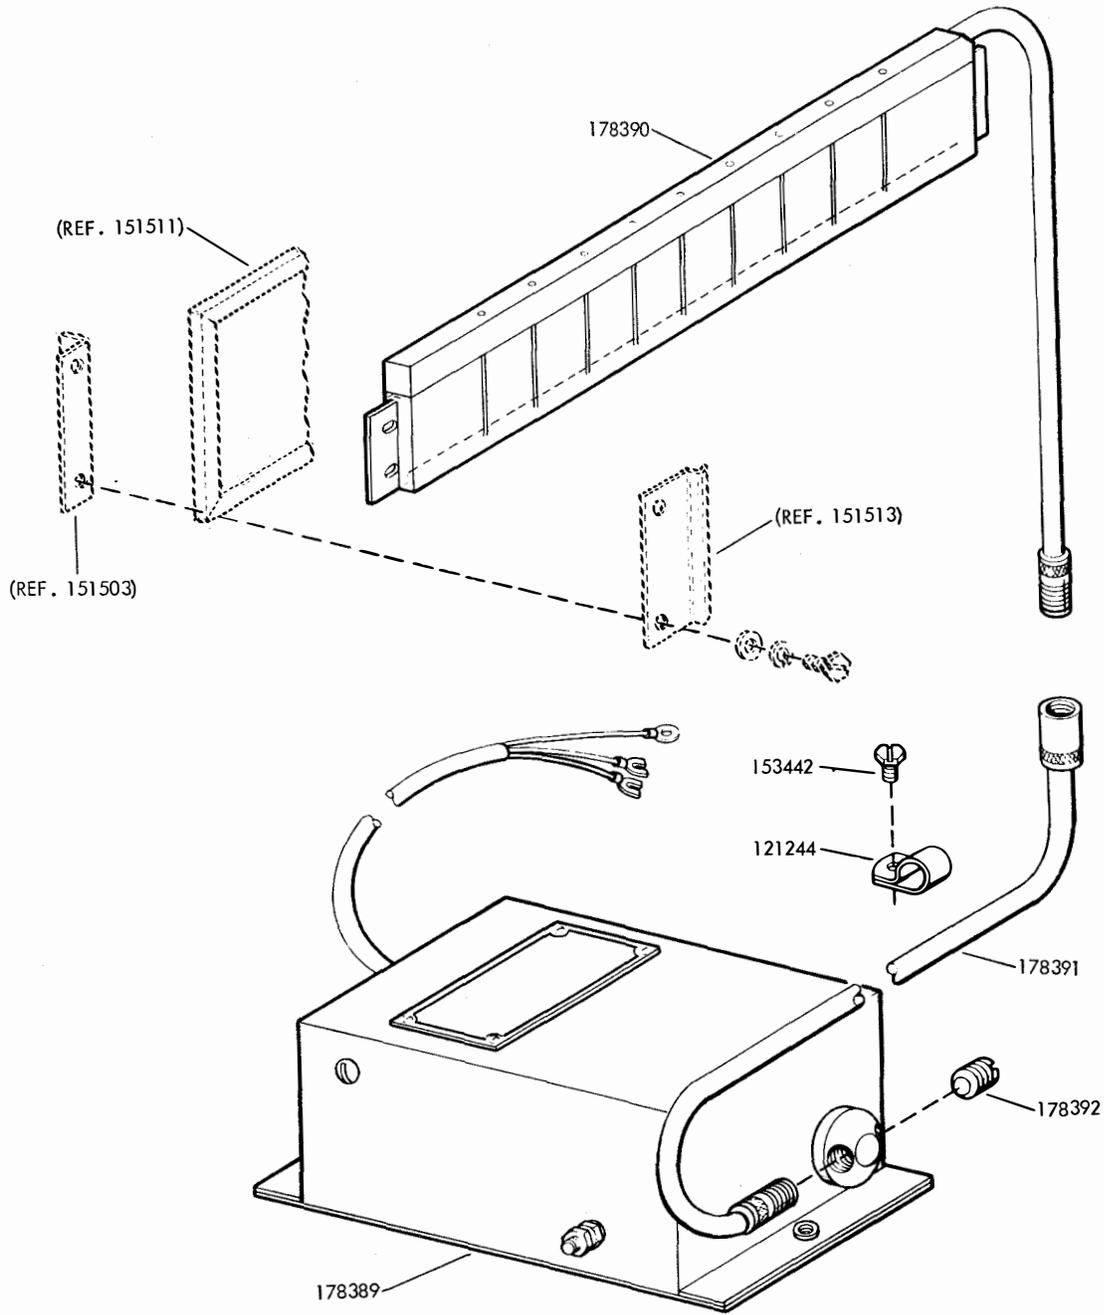


FIGURE 36. 178337 MODIFICATION KIT TO PROVIDE HIGH VOLTAGE STATIC ELIMINATOR TO NEUTRALIZE ELECTROSTATIC CHARGE ON PAGE COPY

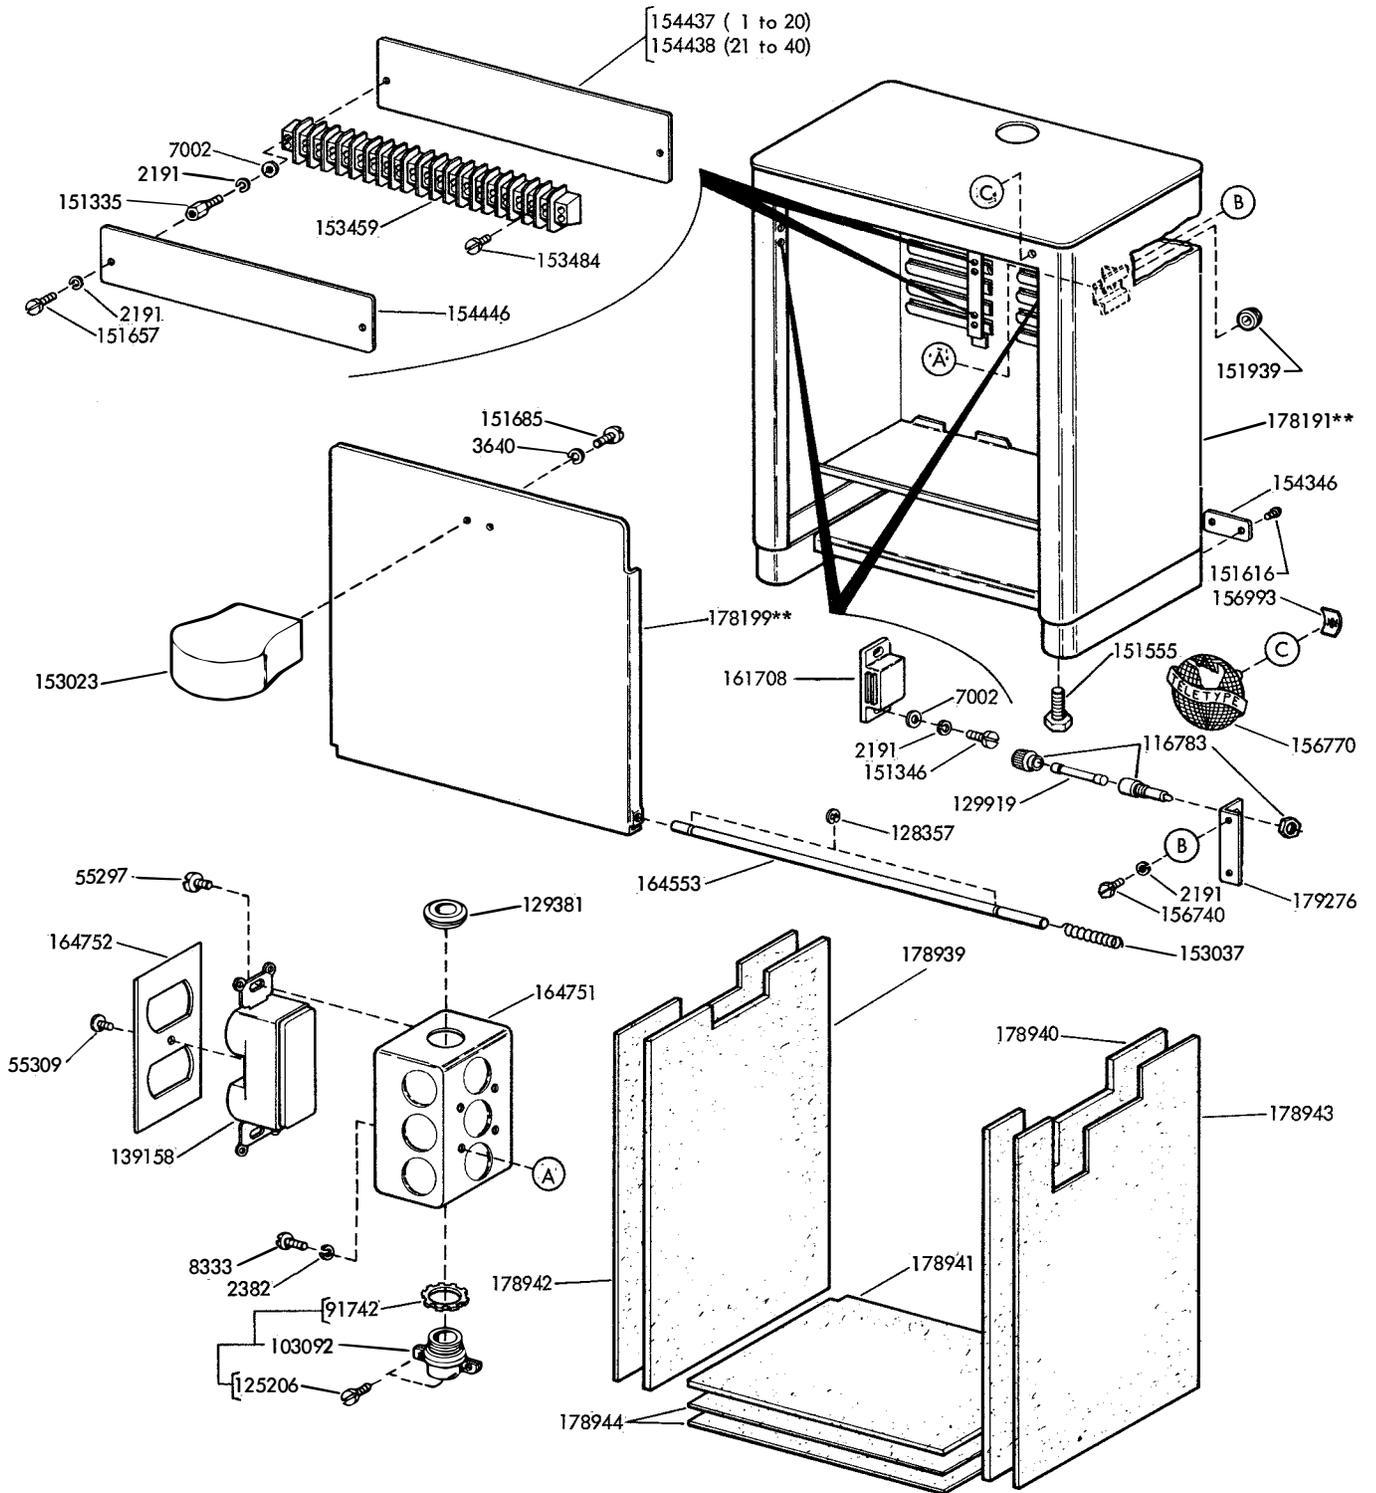

**Refer to Page 1 for Finish Suffix

FIGURE 37. PRINTER TABLE

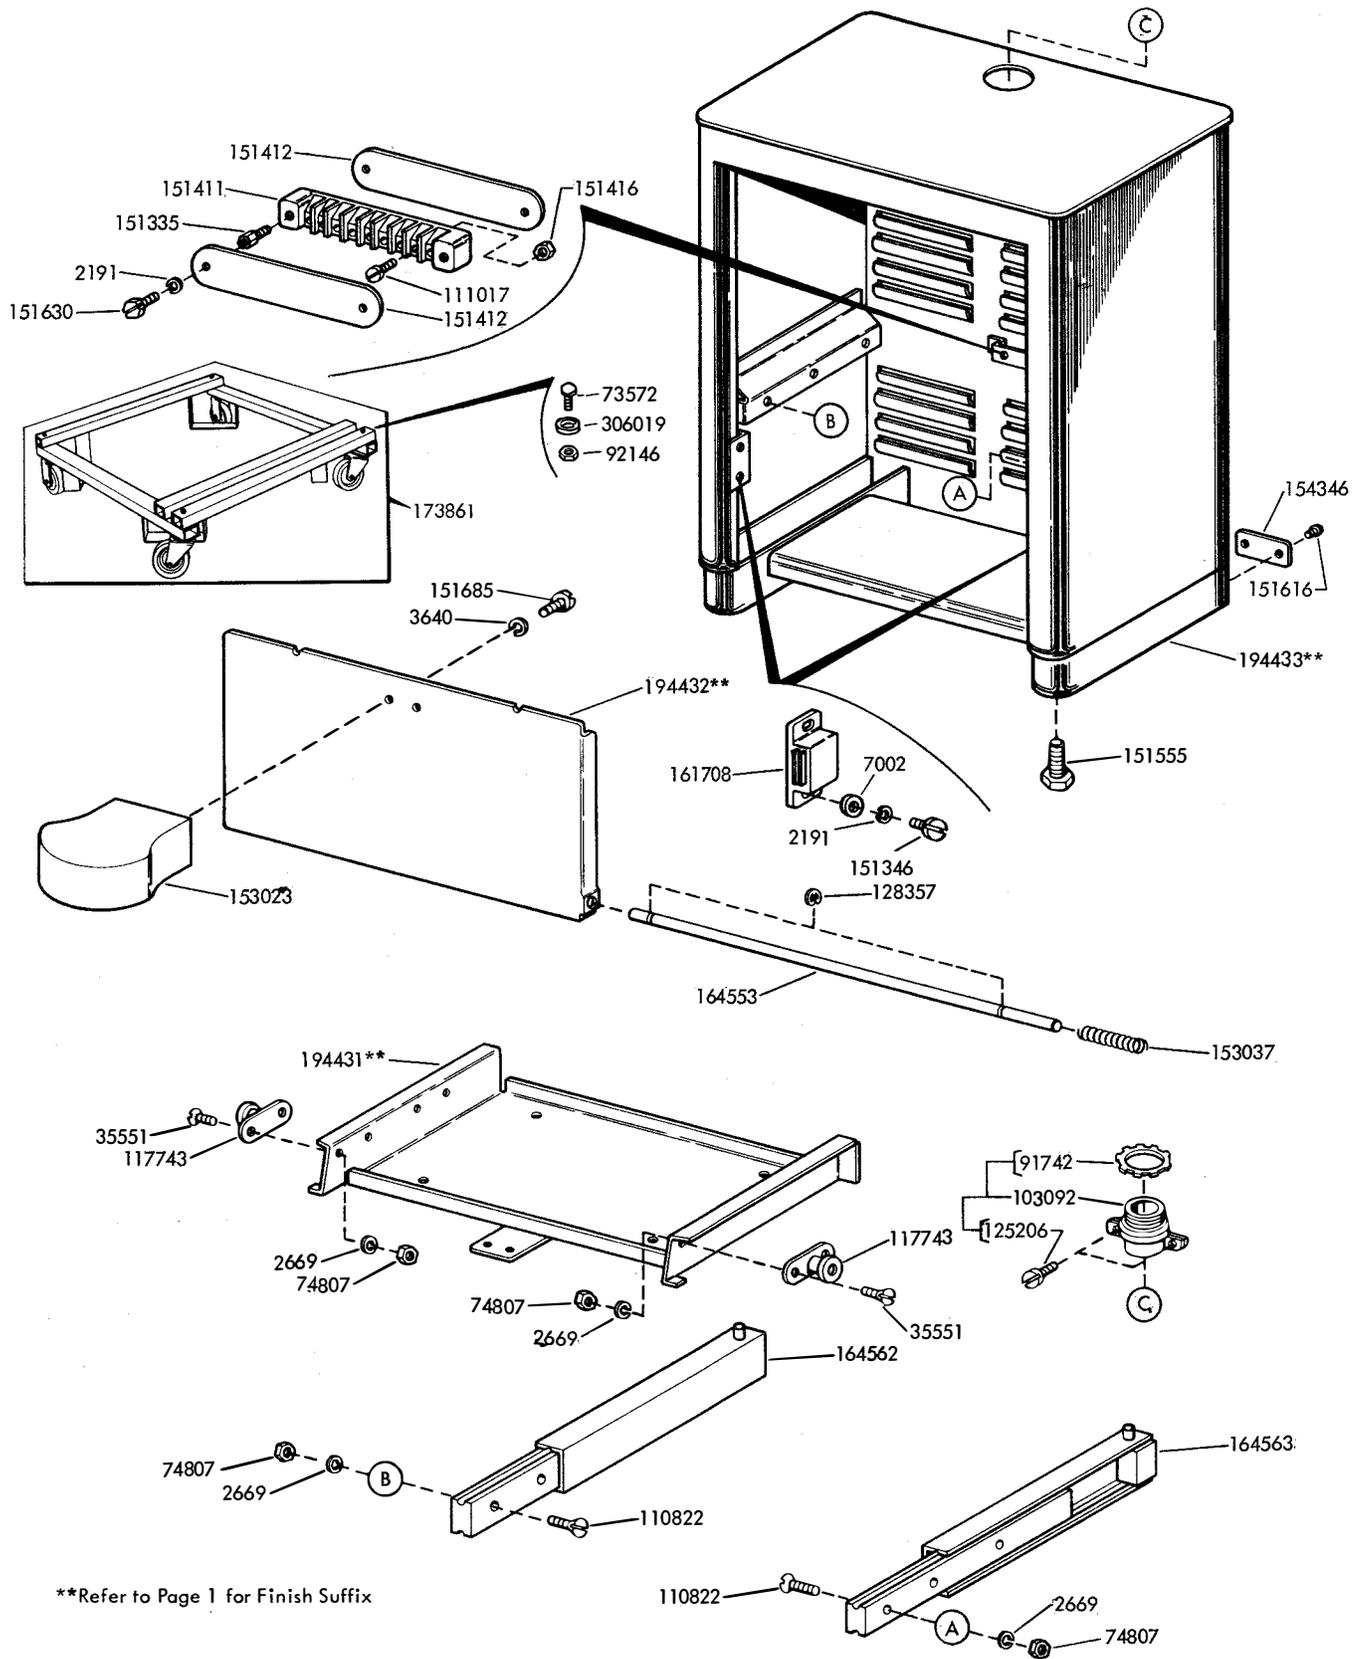


FIGURE 38. PRINTER TABLE WITH SLIDING SHELF

NUMERICAL INDEX

Part Number	Description and Page Number	Part Number	Description and Page Number	Part Number	Description and Page Number
247M	Coil, Magnet 5	55309	Screw (6-32 x 1/2 Oval) 29	102751	Nut (10-32 Hex) 6
1028	Screw (4-40 x 1/4 Fil) 5	70314	Washer, Flat 13, 14	103092	Connector, Cord 3, 4, 29, 30
1113	Screw (1/4-20 x 7/8 Hex) 5	71858	Washer, Flat 5	103120	Nut, Speed 4
1178	Screw (2-56 x 7/16 Fil) 19	73572	Screw (1/4-20 x 1 Hex) 30	103612	Nut (3/8-16 Hex) 21
1263	Screw (6-32 x 1/4 Fil) 5, 6	74011	Screw, Shoulder (6-40) 6	104701	Screw (4-40 x 9/32 Fil) 8
1268	Screw (6-40 x 5/16 Flat) 16	74479	Bushing 5	105237	Switch, Toggle 6
2191	Washer, Lock 3 to 18, 20, 21, 23, 24, 26, 29, 30	74546	Clamp, Cable 3, 4	105650	Screw (10-32 x 9/16 Hex) 17
2382	Washer, Lock 29	74567	Screw (1/4-20 x 33/64 Hex) 4, 5,	106047	Screw (1/4-32 x 1/2 Hex) 24
2449	Washer, Lock 4, 5, 9, 10, 22, 24, 25, 26	74594	Ring, Retaining 3	107116	Washer, Lock 5, 6
2481	Washer, Flat 18	74712	Spring 3, 4	107398	Terminal 9
2539	Nut (3/8-32 Hex) 3	74807	Nut (10-32 Hex) 30	108355	Nut (1/4-20 Hex) 9, 10, 22, 26
2669	Washer, Lock 17, 30	75750	Washer, Insulating 18	110434	Screw (4-40 x 3/16 Fil) 5
2846	Washer, Flat 4, 5, 9, 10, 22, 26	76099	Washer, Flat 3, 4, 5	110435	Nut (4-40 Hex) 5
2920	Washer, Lock 21	76279	Screw (1/4-32 x 5/8 Hex) 25	110437	Spring 5
3226	Washer, Flat 24	78103	Screw (6-40 x 1-3/16 Hex) 5	110743	Washer, Lock 7, 9, 10, 19
3438	Washer, Flat 3, 4, 5, 7, 17, 26	78287	Collar 5	110822	Screw (10-32 x 13/16 Flat) 3, 30
3598	Nut (6-40 Hex) 3, 4, 5, 6, 8, 12, 13, 15 to 18, 23, 24, 26	78469	Foot, Rubber 24	111017	Screw (6-40 x 5/16 Fil) 11, 12, 13, 17, 30
3639	Washer, Lock 3 to 7, 11, 12, 13	79523	Screw (2-56 x 25/32 Fil) 20	111409	Screw (4-40 x 7/32 Fil) 24
3640	Washer, Lock 5, 6, 7, 9, 10, 29, 30	80342	Screw (6-40 x 23/64 Hex) 5	112626	Nut (10-32 Hex) 9
3646	Washer, Lock 5	80481	Screw (6-40 Spl) 26	112627	Nut (2-56 Hex) 20
4703	Spring 5, 6, 7	80854	Screw (6-40 x 1-7/16 Fil) 13, 14	114589	Mount, Vibration 5
4851	Terminal 14	82474	Terminal 5, 8, 9, 11 to 16, 18	114766	Stud 3
5816	Washer, Insulating 8, 15	82505	Screw (6-32 x 11/32 Fil) 7	116783	Holder, Fuse 29
6344	Screw (6-32 x 11/32 Hex) 11	84579	Washer, Flat 3, 4	117743	Roller 30
6345	Nut (6-32 Hex) 3, 4, 16, 18	85529	Screw, Shoulder (10-32) 6	117878	Jumper (3" Black) 14
6347	Screw (6-32 x 3/8 Rd) 17	85559	Washer, Flat 23	118118	Ballast 5
7002	Washer, Flat 3, 4, 5, 6, 8, 11, 12, 13, 15 to 18, 20, 26, 29, 30	86433	Screw (3/8-16 x 2 Hex) 21	118119	Socket, Starter 5
7015	Strip 26	89515	Screw (6-32 Spl) 4	118759	Block, Terminal 3
8333	Screw (10-32 x 3/8 Rd) 3, 4, 5, 29	89969	Washer, Insulating 13, 14	119467	Insulator (.032") 19
34432	Washer, Flat 6	90096	Washer, Insulating 12	119638**	Button, Plug 3
35551	Screw (10-32 x 3/8 Flat) 30	90599	Shim (.008") 7, 9	119641**	Button, Plug 3
35826	Washer, Flat 3, 4	90814	Resistor (1000 Ohm) 8, 15	119649	Ring, Retaining 20
41663	Washer, Flat 11	91683	Nut (15/32-32 Hex) 6, 11, 12, 13	119715	Spacer 11
43954	Bell 5	91742	Nut, Lock 29, 30	121242	Clamp, Cable (1/8" ID) 12
45815	Washer, Lock 9	92146	Nut (1/4-20 Hex) 30	121243	Clamp, Cable (3/16" ID) 5, 8, 11, 12, 13
49514	Nut (8-32 Hex) 27	92527	Washer, Lock 27	121244	Clamp, Cable (1/4" ID) 8, 13, 28
55219	Screw (8-32 x 3/8 Fil) 5	92687	Washer, Flat 23	121245	Clamp, Cable (5/16" ID) 6, 8, 11, 12, 13, 17
55297	Screw (6-32 x 5/16 Flat) 29	93108	Washer, Lock 5, 7	121247	Clamp, Cable (7/16" ID) 8
		93118	Washer, Lock 19	121248	Clamp, Cable (1/2" ID) 17
		94660	Connector (90°) 27	124999	Switch, Sensitive 19, 20
		96258BK	Jumper (3" Black) 14	125011	Washer, Flat 19, 24
		98642	Washer, Lock 3, 4, 7, 26	125014	Washer, Flat 25
		100873	Screw, Shoulder (6-40) 23	125015	Washer, Flat 5, 21, 24
		102092	Screw (6-40 x 1-17/32 Rd) 18	125110	Screw (4-36 x 3/16 Fil) 15
		102180	Screw (6-40 x 1-15/16 Fil) 8, 15		
		102617	Lamp 5		
		102620	Starter 5		

**Refer to Page 1 for Finish Suffix

NUMERICAL INDEX (Continued)

Part Number	Description and Page Number	Part Number	Description and Page Number	Part Number	Description and Page Number
125130	Screw (6-32 x 1/2 Fil) 17	151507	Button 3, 4	151574	Grommet, Rubber 5 26
125139	Screw (4-40 x 1/8 Fil) 8	151508	Spring, Torsion 3, 4	151575	Arm, Stop 6
125170	Screw (8-32 x 5/16 Fil) 27	151509	Washer, Rubber 3, 4	151576	Arm, Stop 7
125206	Screw (6-32 x 5/8 Fil) 29, 30	151510	Window, Plastic 5	151577	Screw, Shoulder (6-40) 5
125218	Nut (1/4-32 Hex) 5	151511	Gasket 5	151578	Hinge 3, 4
125224	Nut (1/4-32 Hex) 24, 25	151512	Seal, Noise 3, 4	151579	Plate, Retaining 5
125231	Nut (10-32 Hex) 3 to 7, 11, 12	151513	Retainer, Window 3, 4	151589	Cradle Assembly 5
128357	Ring, Retaining 3, 29, 30	151514	Bar, Dome Latch 3, 4	151590	Indicator Assembly, Margin 6
129381	Grommet, Rubber 29	151515	Button, Push 3, 4	151594	Mount, Vibration 21
129502	Resistor (100 Ohm) 12	151516	Bracket 6	151595	Arm Assembly, Stop 6
129919	Fuse (4 Amp) 29	151519	Arm, Latch 3, 4	151596	Arm Assembly, Stop 7
136884	Cable W/Terminal 14	151521	Stud 5	151597**	Panel Assembly 4
139158	Connector, Receptacle (Duplex) 29	151522	Rail, Side Cradle 5	151598	Bushing 3
144600	Modification Kit 17	151523	Hub 3, 4	151599	Lever 3, 4
145047	Connector, Receptacle (3 Pt) 9	151524	Hinge, Cradle 5	151616	Screw, Self-Tapping (#2) 3, 29, 30
145077**	Cabinet 3	151525	Rail, Rear Cradle 5	151618	Screw (6-40 x 7/16 Fil) 23
145214	Bracket, Mounting 17	151526	Screw, Thumb (10-32) 3, 4	151626	Terminal 3, 5, 6, 11, 12, 13, 18, 19, 20, 27
145216	Bracket, Terminal 17	151527**	Bar, Cross 3, 4	151630	Screw (6-40 x 1/4 Hex) 3, 6 to 8, 11, 12, 16, 18, 21, 30
145217	Block, Mounting 17	151528	Spring, Torsion 6	151631	Screw (6-40 x 5/16 Hex) 8, 10, 12 to 15
145219	Cable Assembly 17	151529	Plate 5	151632	Screw (6-40 x 3/8 Hex) 17, 24
145220	Modification Kit 17	151530**	Hinge, Dome 3, 4	151637	Screw (4-40 x 1/4 Fil) 7, 9, 10
145253	Lamp, Neon 17	151531	Plate, Starter 5	151657	Screw (6-40 x 1/4 Fil) 3, 4, 11, 12, 13, 20, 23, 29
145254	Lens, Clear Indicator Light 3	151532**	Cover, Form Slot 4	151658	Screw (6-40 x 5/16 Fil) 5, 6, 23, 26
145256	Connector, Plug (3 Pt) 9	151534	Screw, Shoulder (10-32) 3, 4	151659	Screw (6-40 x 1/2 Fil) 8, 17
145277	Cable Assembly 19	151536	Guide 3, 4	151685	Screw (4-40 x 5/16 Fil) 2, 3, 6, 7, 9, 10, 29, 30
145278	Modification Kit 19	151537	Copyholder 6	151686	Screw (4-40 x 3/8 Fil) 5
145721	Bracket, Mounting 17	151538	Spring, Torsion 3, 4	151691	Screw (10-32 x 3/8 Fil) 11
150040	Screw (6-40 x 5/8 Fil) 3, 4, 5, 17, 24	151540	Lampholder 5, 6, 8, 11, 12, 13, 15, 16, 18	151692	Screw (6-40 x 3/16 Fil) 3, 4
150361	Spacer 14	151541	Shaft W/Fork 3, 4	151718	Socket, Lamp 5
150710	Screw (6-40 x 1-1/4 Fil) 12	151542	Stud 3, 4	151722	Screw (6-40 x 3/16 Hex) 5
150966	Insulator (1-4) 11, 12, 13	151544	Shield 5	151723	Screw (10-32 x 3/8 Hex) 3, 4, 5, 12
151152	Screw (4-40 x 3/16 Hex) 19	151545	Guide, Paper 3, 4	151724	Screw (10-32 x 5/8 Hex) 11, 14
151229	Washer, Flat 20	151547	Spring, Torsion 6	151726	Bumper, Rubber 3
151335	Stud 3, 12, 13, 29, 30	151548	Spring 6	151727**	Extension, Hinge 3, 4
151346	Screw (6-40 x 3/8 Fil) 5, 8, 29, 30	151549	Post 5	151819	Jumper (3" Black) 3
151411	Block, Terminal 30	151550	Cable Assembly 5	151827	Strap, Terminal 11
151415	Block, Terminal 11, 12, 13	151551	Copyright Assembly 5	151939	Grommet, Rubber 29
151412	Insulator (1-9) 30	151553	Foot 3	151955	Guide, Cable 5
151416	Nut (6-40 Hex) 11, 12, 13, 17, 30	151555	Foot, Mounting 5, 6, 29, 30	151956	Guide, Cable 3, 4
151435	Insulator (1-30) 3	151556	Knob 3, 4	151982	Lamp, Incandescent (6V) 6, 11, 12, 16
151436	Cover 3	151558	Nut, Speed 3, 4, 8, 15		
151442	Screw (6-40 x 1/2 Hex) 5	151559	Spring 3, 4		
151500**	Cabinet 3	151560	Bell Assembly, Remote 5		
151503**	Door 3, 4	151562	Lamp, 115V Incandescent 6		
151504	Gasket 3, 4	151564	Bracket 5		
151505	Gasket 3, 4	151565	Bushing, Shoulder 5		
151506	Latch 3, 4	151567	Armature W/Clapper 5		
		151569	Strap 5		
		151571	Cable W/Terminals 5		
		151572	Washer, Lock 5		
		151573**	Panel 4		

**Refer to Page 1 for Finish Suffix

NUMERICAL INDEX (Continued)

Part Number	Description and Page Number	Part Number	Description and Page Number	Part Number	Description and Page Number
151983	Shield 6	153130**	Copyholder 7,9	154756	Modification Kit 19
151988	Modification Kit 27	153388	Stud 3, 4, 11	154777	Modification Kit 13
151989	Suppressor, Electrical Noise 27	153400	Lamp, 60V Incandescent 6, 8, 11, 13, 14, 15, 17, 18	154793	Modification Kit 21
152056	Guide, Cable 3	153442	Screw (10-32 x 1/2 Hex) 3 to 6, 11, 12, 13, 28	154868	Plate 24
152300**	Modification Kit 26	153455	Resistor (600 Ohm) 18	154869**	Bracket 7
152309	Copyright Assembly 6	153459	Block, Terminal 3, 4, 8, 16, 29	154874	Connector, Plug (2 Pt) 15
152310	Modification Kit 6	153465	Nut (6-32 Hex) 16	155045	Switch, Toggle (SP-DT) 6, 11, 12, 13
152319	Modification Kit 16	153466	Cover 3, 4, 16	155063	Pad 13, 14
152349**	Modification Kit 23	153467	Insulator 16	155083	Lens, Red Indicator Light 3, 4, 8, 15
152426	Nut, Self-Locking (6-40 Hex) 23	153468	Insulator, Left (1-20) 3, 4, 16	155085**	Bracket 7
152465	Connector, Receptacle (20 Pt) 9	153469	Strip, Right 16	155086	Pad, Rubber 7
152466	Connector, Receptacle (20 Pt) 8, 9	153470	Insulator, Right (21-40) 3, 4, 16	155087	Screw (1/4-20 x 7/16 Rd) 7
152767**	Dome 3, 4	153471	Strip, Left 16	155088**	Holder 26
152768	Window, Glass 5	153474	Cable Assembly 6	155547	Bracket, Left 22
152797**	Plate 4	153484	Screw (6-32 Spl) 3, 4, 8, 16, 29	155548	Bracket, Right 22
152848	Screw (1/4-20 x 3/4 Rd) 9, 10, 22, 26	153486	Bracket 6	155563	Plate, Mounting 14
152882	Arm, Left Counterbalance 3, 4	153487	Cable Assembly 6, 18	155597	Lens, Yellow Indicator Light 3, 16
152883	Arm, Right Counterbalance 3, 4	153488**	Cabinet 3	155614	Cover 8
152884	Screw (12-24 x 1 Hex) 3, 4	153537	Screw (6-40 x 9/32 Hex) 7, 9, 10	155723	Screw (4-48 x 1/2 Fil) 8
152899**	Holder 26	153540**	Cabinet 4	155750	Sleeve, Insulating (3/32 ID x 1/2" Lg) 9, 19
152902	Modification Kit 15	153541	Cover 4	155751	Sleeve, Insulating (1/8 ID x 1" Lg) 9, 13, 14
152910**	Modification Kit 26	153622	Jumper (5" Purple) 14	155752	Sleeve, Insulating (5/64 ID x 1/2" Lg) 9
153017	Nut, Speed 22	153830	Guide, Rear 26	155753	Sleeve, Insulating (1/8 ID x 1/2" Lg) 9
153020	Guide, Line 5, 6	153833	Bracket, Guide 26	155754	Sleeve, Insulating (1/16 ID x 1/2" Lg) 9
153021	Spring, Torsion 5, 6, 7, 9, 10	153834**	Shelf, Paper 23	155755	Sleeve, Insulating (11/64 ID x 5/8" Lg) 9
153022	Bushing 5, 6, 7, 9, 10	153835**	Plate, Deflector 23	155766	Clamp, Cable 8
153023	Handle 5, 6, 7, 9, 10, 29, 30	153836**	Bracket, Backstop 23	155846	Bushing, Adapter 21
153024	Shaft 6	153837**	Shelf, Paper Box 23	155858	Resistor (700 Ohm) 13, 14
153027	Post 6	153842	Clip, Paper Holder 23	155859	Screw (4-40 x 1/8 Pan Hd) 8, 9
153032	Bracket, Detent 3	153901**	Modification Kit 24	155860	Screw (4-40 x 3/8 Rd) 8, 9
153033	Arm, Detent 3	153920	Modification Kit 8	155861	Washer, Lock 8, 9
153034	Shaft Assembly 3	153926	Modification Kit 26	155862	Spring 3, 4
153035**	Panel 3	154308	Pad 3, 4	155899	Nut (12-24 Spl) 3, 4
153036	Shaft 3	154346	Plate, Instruction 29, 30	156740	Screw (6-40 x 7/32 Hex) 29
153037	Spring, Compression 3, 29, 30	154348	Plate, Instruction (ON-OFF) 3	156770	Plate, Identification (Teletype) 3, 4, 29
153039	Handle 3	154399	Plate, Identification (Bell) 3	156993	Nut, Speed 3, 4, 29
153042	Window, Plastic 5	154404	Tray, Copyholder 5, 6	157152	Modification Kit To Add Terminal Block Assembly 8
153043	Window, Glass 5	154409**	Plate 3, 4	157153	Bracket Assembly 8
153046	Copyholder Assembly 5	154437	Insulator (1-20) 29	157154	Insulator (41-80) 8
153047	Copyholder Assembly 7	154438	Insulator (21-40) 29	157155	Cover 8
153048	Stud, Wing Head 3	154446	Cover 29	157156	Cable Assembly 8
153099	Arm, Pivot 7, 9, 10	154651	Modification Kit 27	157157	Modification Kit To Add Busy Lamp 8
153100**	Cabinet 3	154655	Suppressor, Electrical Noise 27	157158	Cable Assembly 8
153104**	Bracket 7, 9	154695**	Bracket 24	157159	Plate 8, 15
153106**	Plate, Bearing 7, 9	154697	Grommet, Rubber 24		
153107	Arm 7, 9, 10	154741	Modification Kit 8		
153113	Guide, Line 7, 9, 10	154754**	Modification Kit 21		
153126	Plate, Nut 7, 9, 10				

**Refer to Page 1 for Finish Suffix

NUMERICAL INDEX (Continued)

Part Number	Description and Page Number	Part Number	Description and Page Number	Part Number	Description and Page Number
157160	Cable Assembly 15	160283	Bracket 22	176669	Lever 20
157260	Cable Assembly 8	160394	Lens, Indicator Light 16	176670	Lever 20
157278	Cable Assembly 11, 12	160461	Bracket 8	176671	Insulator 20
157280	Cable Assembly 12	161306	Modification Kit To Provide Copyholder with a Formed Line Guide Shaft 5, 6	176708	Bracket 20
157281	Transformer Assembly 12			176711	Spring, Torsion 20
157282	Bracket 12			176712	Spring, Torsion 20
157393	Grommet, Rubber 8	161708	Latch, Magnetic 29,30	176714	Modification Kit 20
157399	Connector, Receptacle (35 Pt) 8	161750	Bracket 8	176786	Cable Assembly 20
157532	Modification Kit To Add Terminal Board and Cable Assembly 8	162370	Cable 8	178191**	Table W/Pads 29
157878	Screw (1/2-13 x 5/8 Hex) 21	162590	Shaft 5	178199**	Panel 29
157879	Bracket 21	162628	Shaft W/Fork 3, 4	178387	Modification Kit 28
157880	Bracket 21	163161	Connector, Plug (20 Pt) 9	178389	Power Unit 28
157881	Plate 21	163796**	Modification Kit 24	178390	Bar 28
157882**	Cover 21	164024**	Modification Kit 9	178391	Cable 28
157883**	Cover 21	164025**	Bracket 7, 9	178392	Plug, Outlet 28
157980	Extension 19	164028**	Copyholder 7, 9	178729	Plate, Tear 18
157981	Bracket 19	164235**	Modification Kit 24	178892**	Copyholder 10
157982	Lever 19	164362	Modification Kit 6	178893**	Plate 10
157984	Screw, Shoulder (4-40) 19	164383**	Shelf 24	178894**	Bracket 10
157985	Cable Assembly 19	164553	Shaft 29, 30	178895	Shaft 10
157992	Bracket 8	164562	Slide, Left 30	178897**	Modification Kit 10
157993	Bracket 8	164563	Slide, Right 30	178900**	Cabinet 3
157999	Bracket 11	164751	Box, Junction 29	178914**	Plate, Bearing 10
158250	Block, Terminal 17	164752	Plate, Cover 29	178939	Pad, Left Side 29
158252	Insulator (1-6) 17	165168	Key 17	178940	Pad, Right Side 29
158492	Cable Assembly 13	165668	Modification Kit 11	178941	Pad, Shelf 29
158493	Cable Assembly 13	173097**	Modification Kit 25	178942	Pad, Left Side 29
158494	Bracket 13	173206**	Bracket, Left Shelf 25	178943	Pad, Right Side 29
159274	Cable Assembly 11	173207**	Shelf, Left 25	178944	Panel, Shelf 29
159275	Transformer Assembly 11	173238	Modification Kit 18	179276	Bracket, Fuse 29
159357	Modification Kit 11	173256	Cable Assembly 18	179993	Screw, Shoulder (10-32) 6
159373	Modification Kit 22	173400**	Modification Kit 7	192286	Nut, Speed 11
159375	Modification Kit 14	173861	Cart 30	194431**	Tray 30
159390	Modification Kit 22	173974	Screw (10-32 x 5/16 Hex) 17	194432**	Panel 30
160224	Modification Kit 16	174458	Modification Kit 18	194433**	Table 30
160225	Cable Assembly 16	176667	Spacer 20	195848	Bracket, Nylon 11
160282	Bracket 22	176668	Bracket 20	195979	Bracket, Copy Lamp 11
				306019	Bumper, Rubber 30

**Refer to Page 1 for Finish Suffix