

28 AND 35 MOUNTING AND COVER ASSEMBLY

PARTS

FIGURE	CONTENTS	PAGE
1	Base	2
2	Intermediate Shaft Assembly	3
3	Electrical Components and Cover	4
	Numerical Index	5


PAINT FINISH COLOR CODE CHART		
COLOR	Finish Suffixes	
	Textured Vinyl	Smooth Vinyl
Green Gray Light Gray Olive Gray	GA(45)	HB(68) HF(46)
The double asterisk(**) denotes a painted part. Suffix to be applied following the part number. Number in parentheses indicates Bell System Code.		

Mounting and Cover Assembly		Distributor Base	
Bell System Code	Teletype Code	Bell System Code	Teletype Code
28A**	VCL274**(LRSB201** and LMU31)	35A	LRSB205
28B**	VCL298**(LRSB203** and LMU3)		
28C**	VCL509**(LRSB204** and LMU31)		

The part identification information contained in the following change notices have been incorporated in this issue.


TCN's #895, #919, #1018

NOTE: When ordering parts from this section, prefix each number with the letters TP.

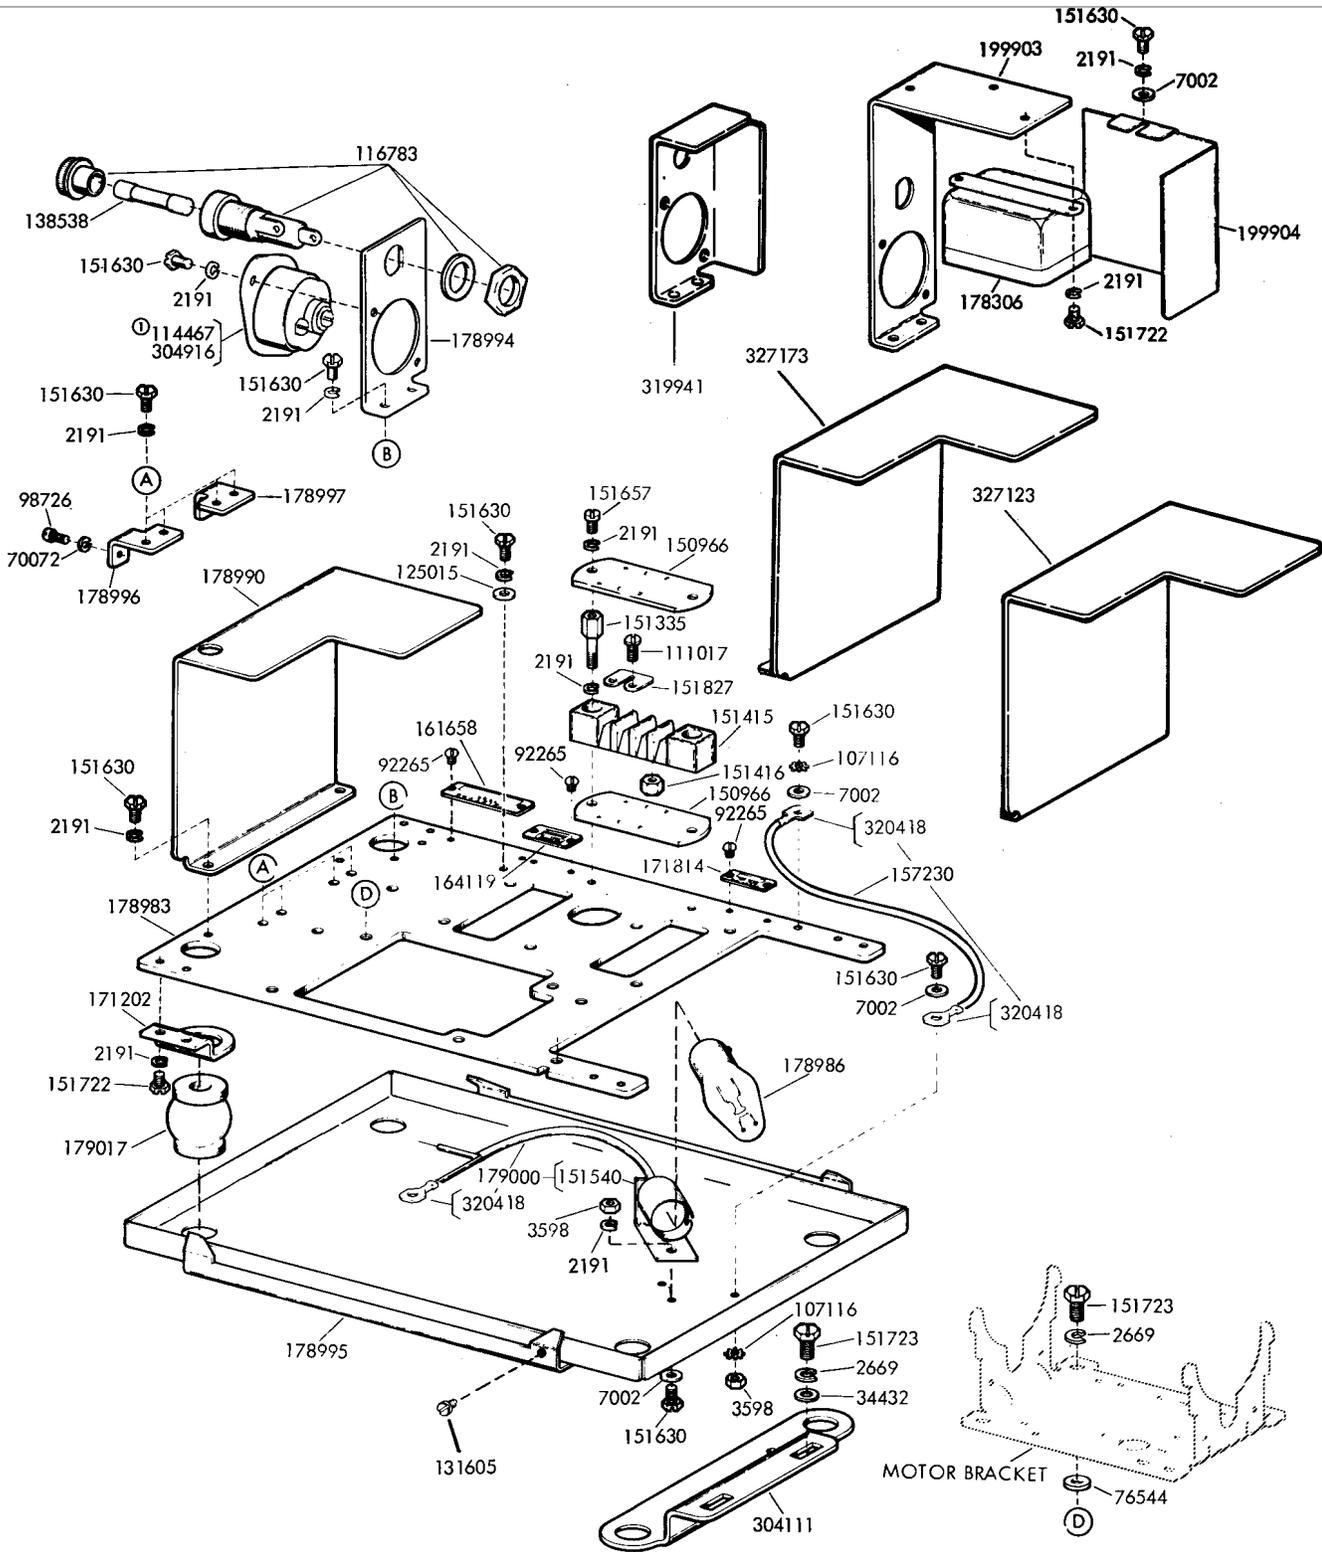

**Refer to page 1 for finish suffix
 ⓐ Peculiar to 8-Level Units

FIGURE 1. BASE

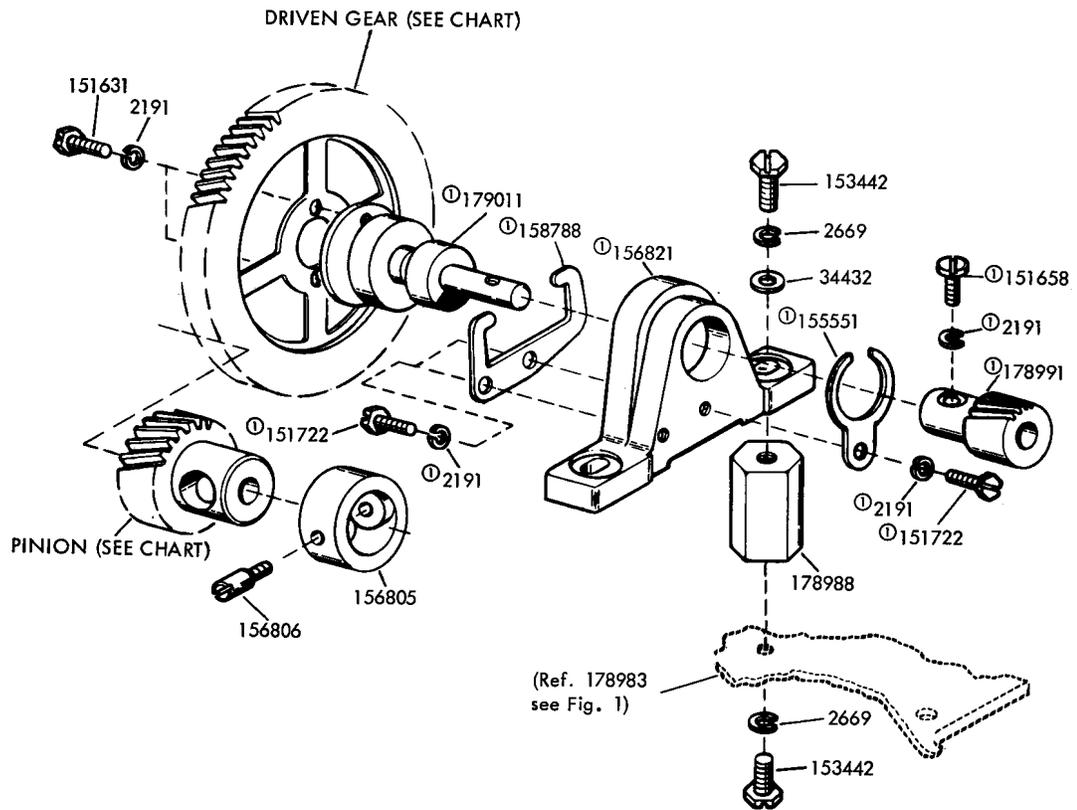

GEAR AND PINION CHART			
W.P.M.	GEAR SET	DRIVEN GEAR	PINION
60	156658	156626	156627
75	156728	156726	156725
100	156659	156628	156629

Ⓞ178999 Intermediate Shaft Assembly

FIGURE 2. INTERMEDIATE SHAFT ASSEMBLY

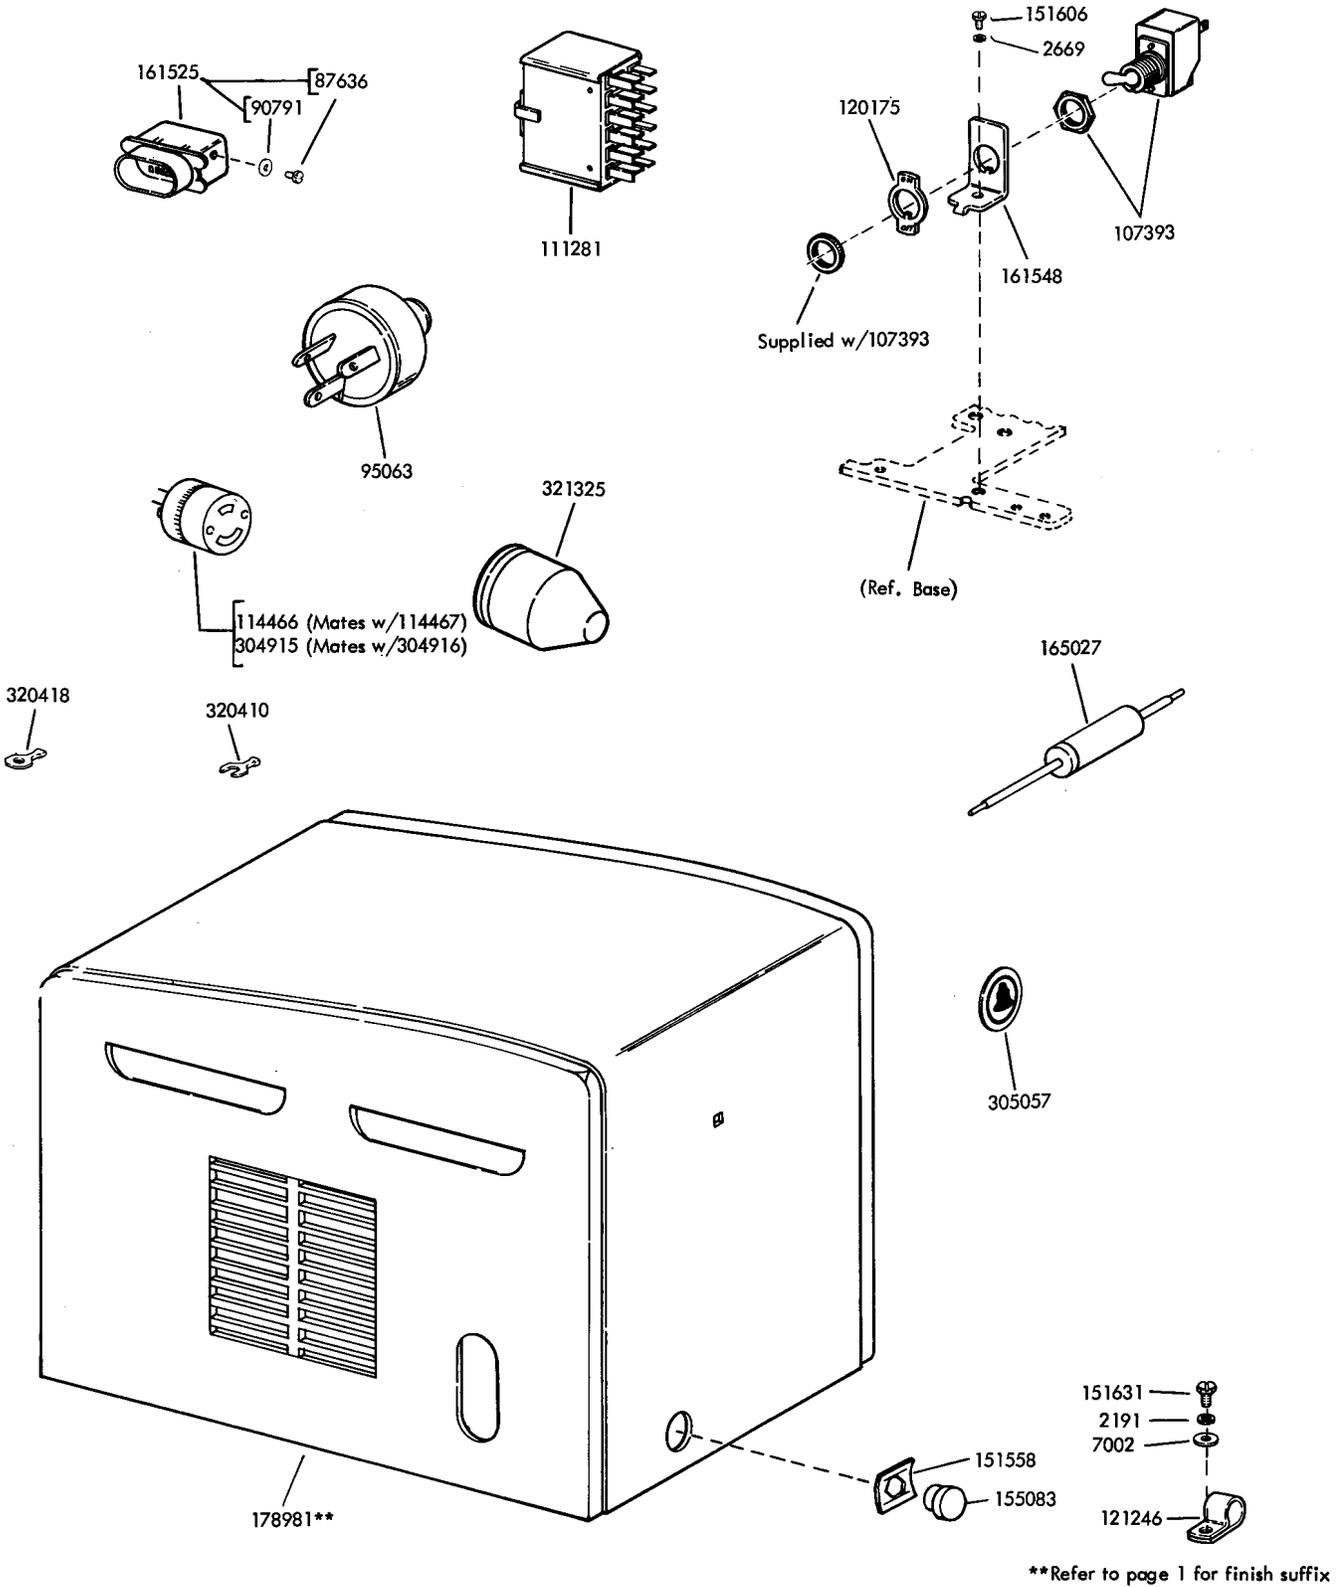


FIGURE 3 ELECTRICAL COMPONENTS AND COVER

NUMERICAL INDEX

Part Number	Description and Page Number	Part Number	Description and Page Number	Part Number	Description and Page Number
2191	Lockwasher 2,3,4	151606	Screw, 10-32 x 1/4 Hex 4	165027	Network, Spark Suppression 4
2669	Lockwasher 2,3,4	151630	Screw, 6-40 x 1/4 Hex 2	171202	Bracket 2
3598	Nut, 1/4-32 Hex 2	151631	Screw, 6-40 x 5/16 Hex 3,4	171814	Plate, Identification 2
7002	Washer, Flat 2,4	151657	Screw, 6-40 x 1/4 Fil 2	178306	Relay, Power 2
34432	Washer, Flat 2,3	151658	Screw, 6-40 x 5/16 Fil 3	178981**	Cover 4
70072	Lockwasher 2	151722	Screw, 6-40 x 3/16 Hex 2,3	178983	Plate 2,3
76544	Spacer 2	151723	Screw, 10-32 x 3/8 Hex 2	178986	Lamp, 115V Incandescent 2
87636	Screw, 2-56 x 3/16 Rb 4	151827	Strap, Terminal 2	178988	Stud 3
90791	Lockwasher 4	153442	Screw, 10-32 x 1/2 Hex 3	178990	Guard, Gear 2
92265	Screw, 2-56 x 1/8 Rb 2	155083	Lens, Red Indicator Light 4	178991	Gear, 20T 3
95063	Connector, 3 PT Plug 4	155551	Clamp, Bearing 3	178994	Bracket, Mounting 2
98726	Screw, 3-48 x 1/4 Fil 2	156626	Gear, 88T 3	178995	Bracket, Contact 2
107116	Lockwasher 2	156627	Pinion, 18T 3	178996	Bracket, Left Connector 2
107393	Switch, SP-Toggle 4	156628	Gear, 72T 3	178997	Bracket, Right Connector 2
111017	Screw, 6-40 x 5/16 Fil 2	156629	Pinion, 24T 3	178999	Shaft Assembly 3
111281	Connector, 18 Pt Plug 4	156658	Gearset, 60 WPM 3	179000	Cable Assembly 2
114466	Connector, 3 Pt Receptacle 4	156659	Gearset, 100 WPM 3	179011	Shaft w/Bearings 3
114467	Connector, 3 Pt Plug 2	156725	Pinion, 24T 3	179017	Mount, Vibration 2
114467	Connector, 3 Pt Plug 4	156726	Gear, 94T 3	199903	Bracket, Mounting 2
116783	Holder, Fuse 2	156728	Gearset, 75 WPM 3	199904	Guard, Terminal 2
120175	Plate, On-Off 4	156805	Retainer 3	304111	Bracket, Mounting 2
121246	Clamp, 3/8 ID Cable 4	156806	Post 3	304915	Connector, 2 Pt Receptacle 4
125015	Washer, Flat 2	156821	Housing, Bearing 3	304916	Connector, 2 Pt Plug 2,4
131605	Screw, 4-40 Rd 2	157230	Jumper, 6" Black 2	305057	Plate, Identification 4
138538	Fuse, SL-BL-2 Amp 2	158788	Clamp, Bearing 3	319941	Bracket, Mounting 2
150966	Insulator, Terminal, Block 2	161525	Connector, 14 Pt Plug 4	320410	Terminal, Spade Type 4
151335	Stud 2	161548	Bracket, Switch 4	320418	Terminal, Ring Type 2,4
151415	Block, Terminal 2	161658	Plate, Identification 2	321325	Cover, Connector 4
151416	Nut, 6-40 Hex 2	164119	Plate, Teletype Identification 2	327123	Insulator 2
151540	Lampholder 2			327173	Guard, Gear 2
151558	Nut, Speed 4				

**Refer to page 1 for finish suffix