


**16C1 TELEGRAPH REPEATER
AND BALANCED LOOP APPLIQUE**


1. GENERAL

1.001 This addendum to Section 312-304-100, Issue 1 is issued to replace Figures 12, 13 and 14 with revised Figures 12, 13 and 14.


1.002 The changes made in Figures 12, 13 and 14 rectify errors in the previous issue. The spacing polarity on the R lead to the coupling unit is changed from +130 volts to -130 volts and the marking voltage from -130 volts to +130 volts.

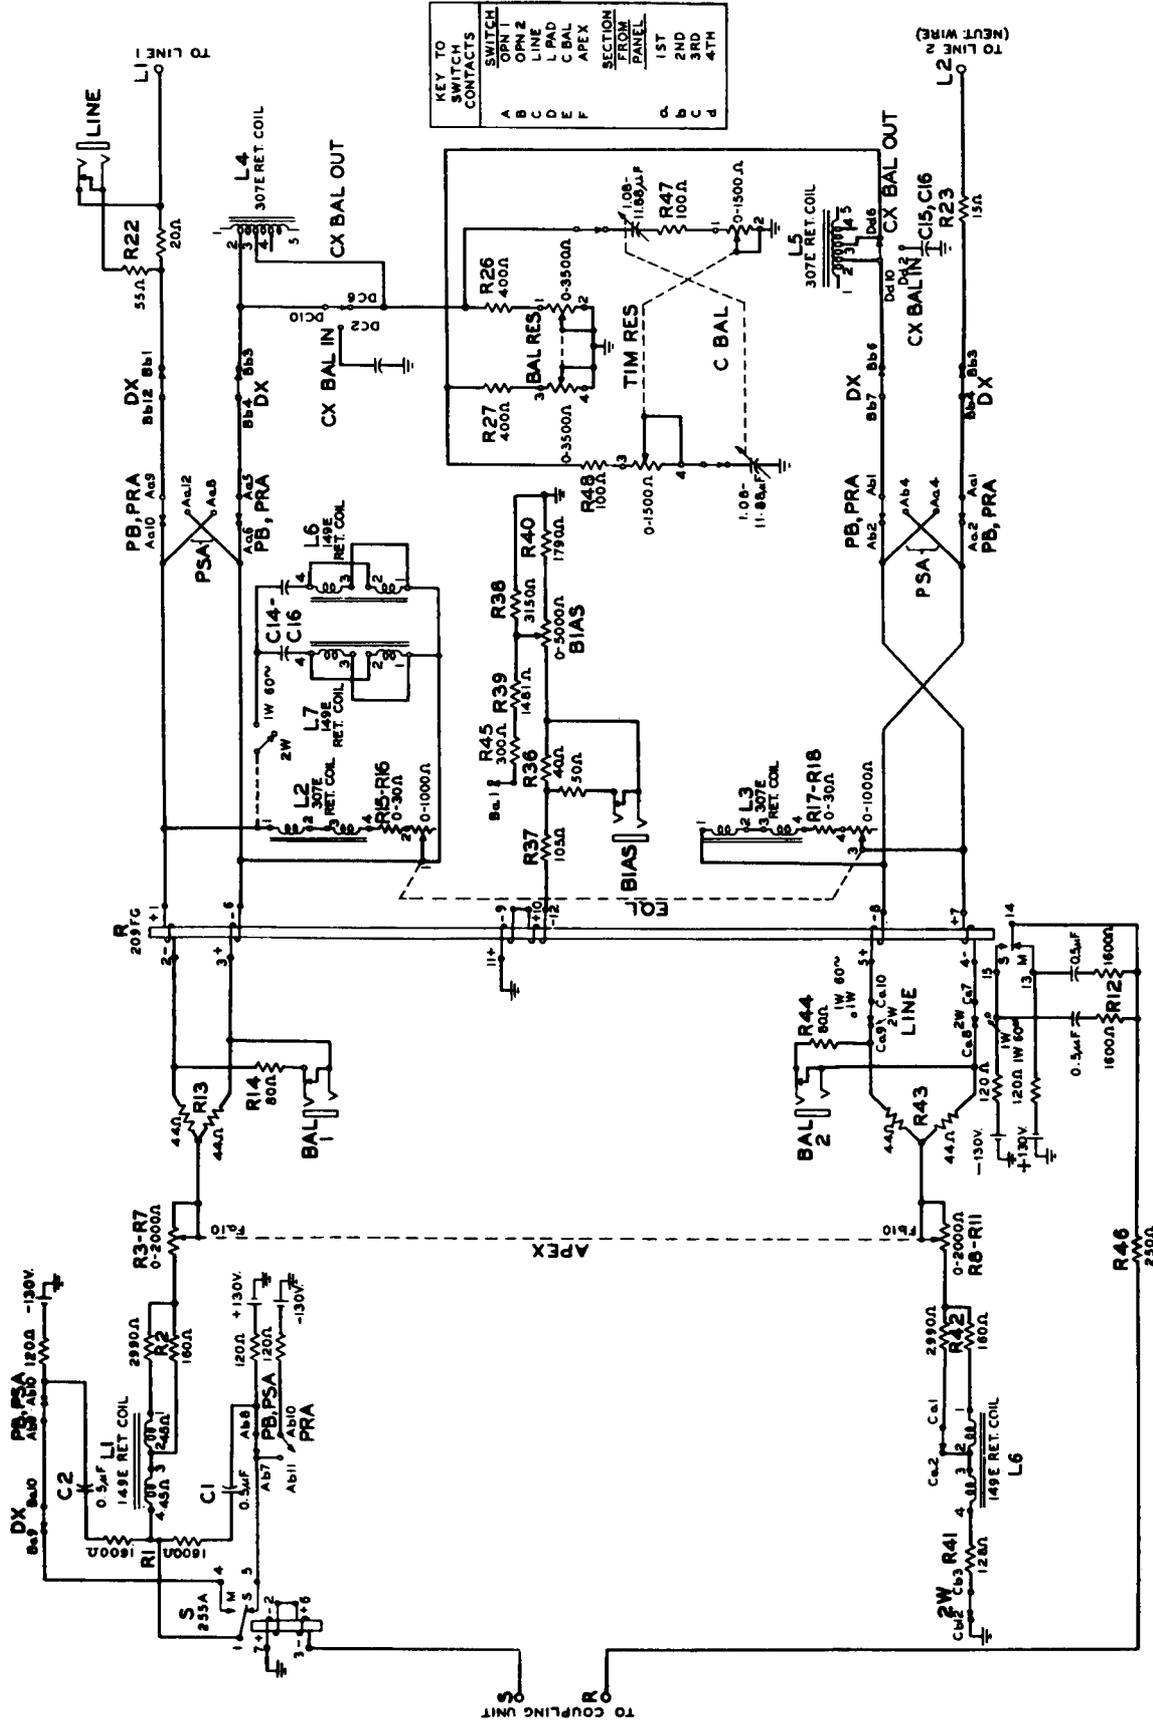

Revised Fig. 12—Differential Duplex Battery and Line Normal

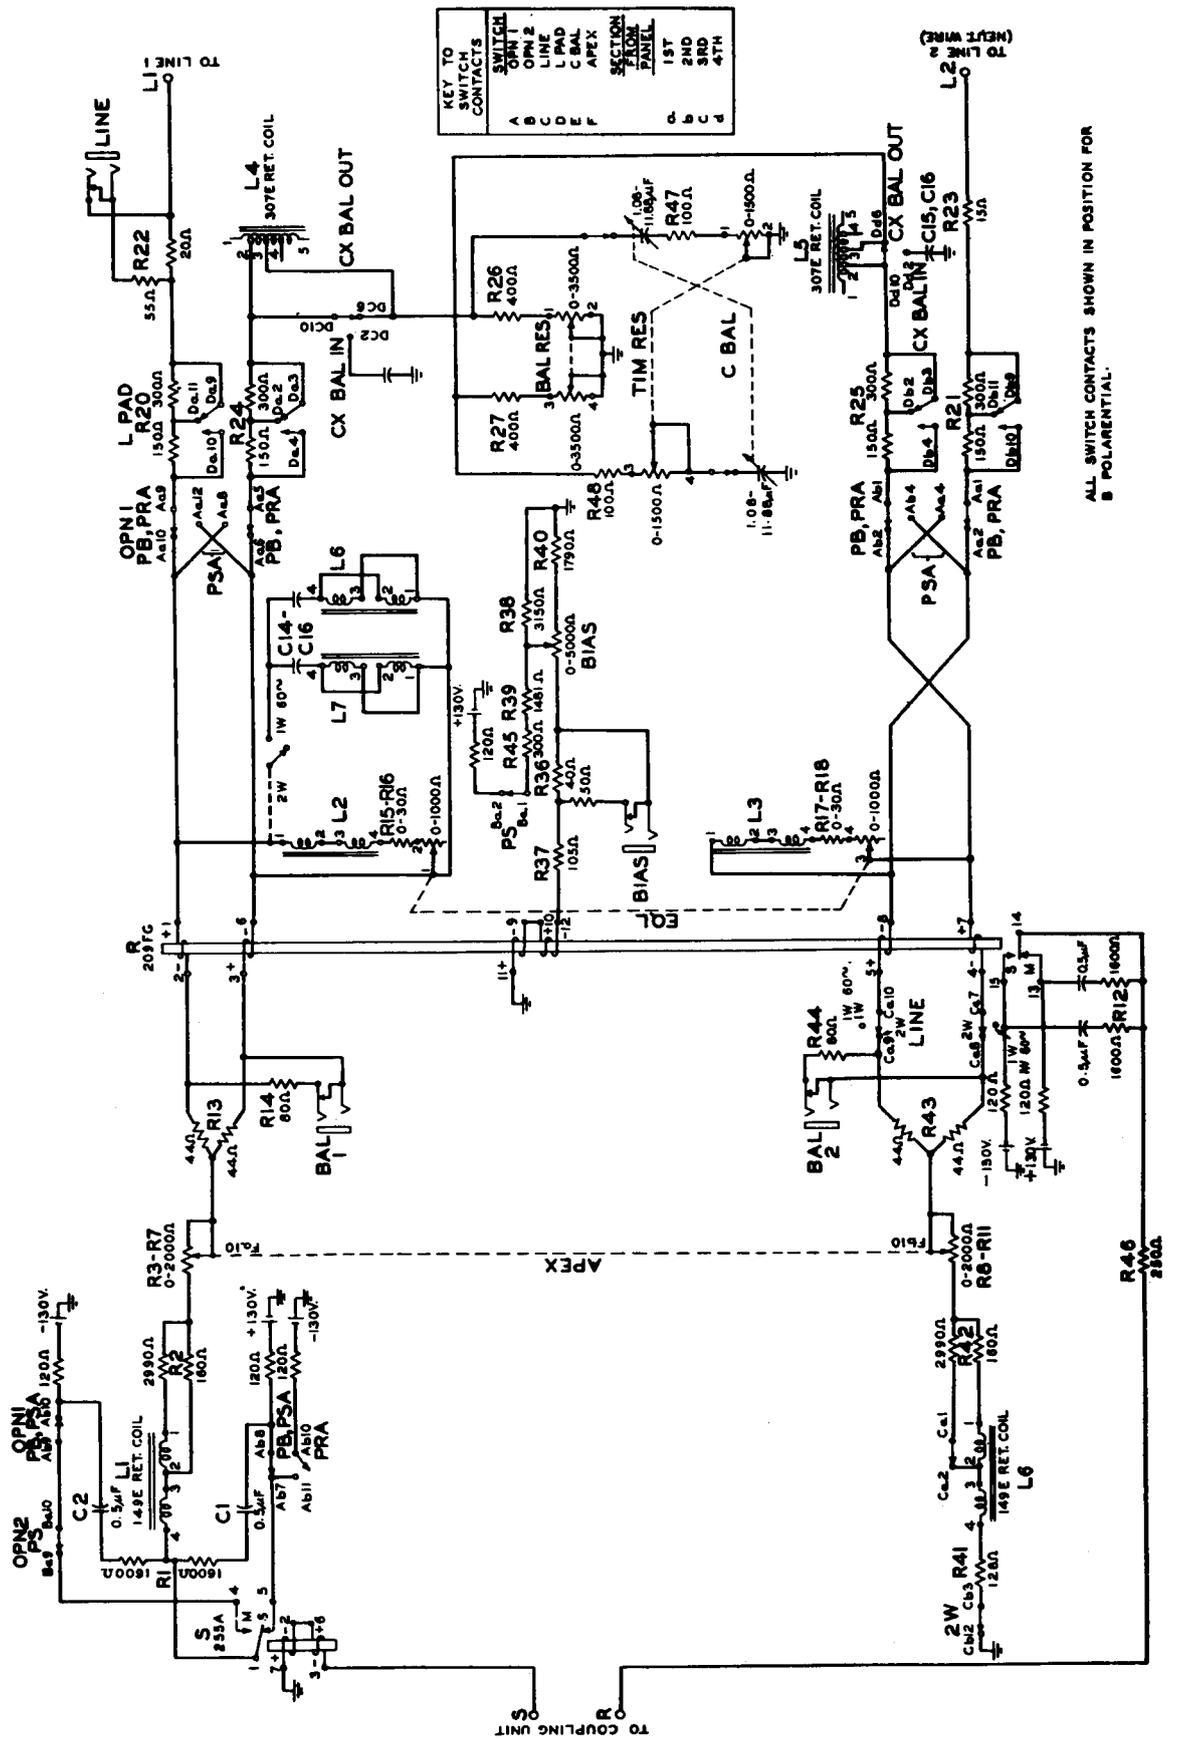

Revised Fig. 13—Polarential Polar Send

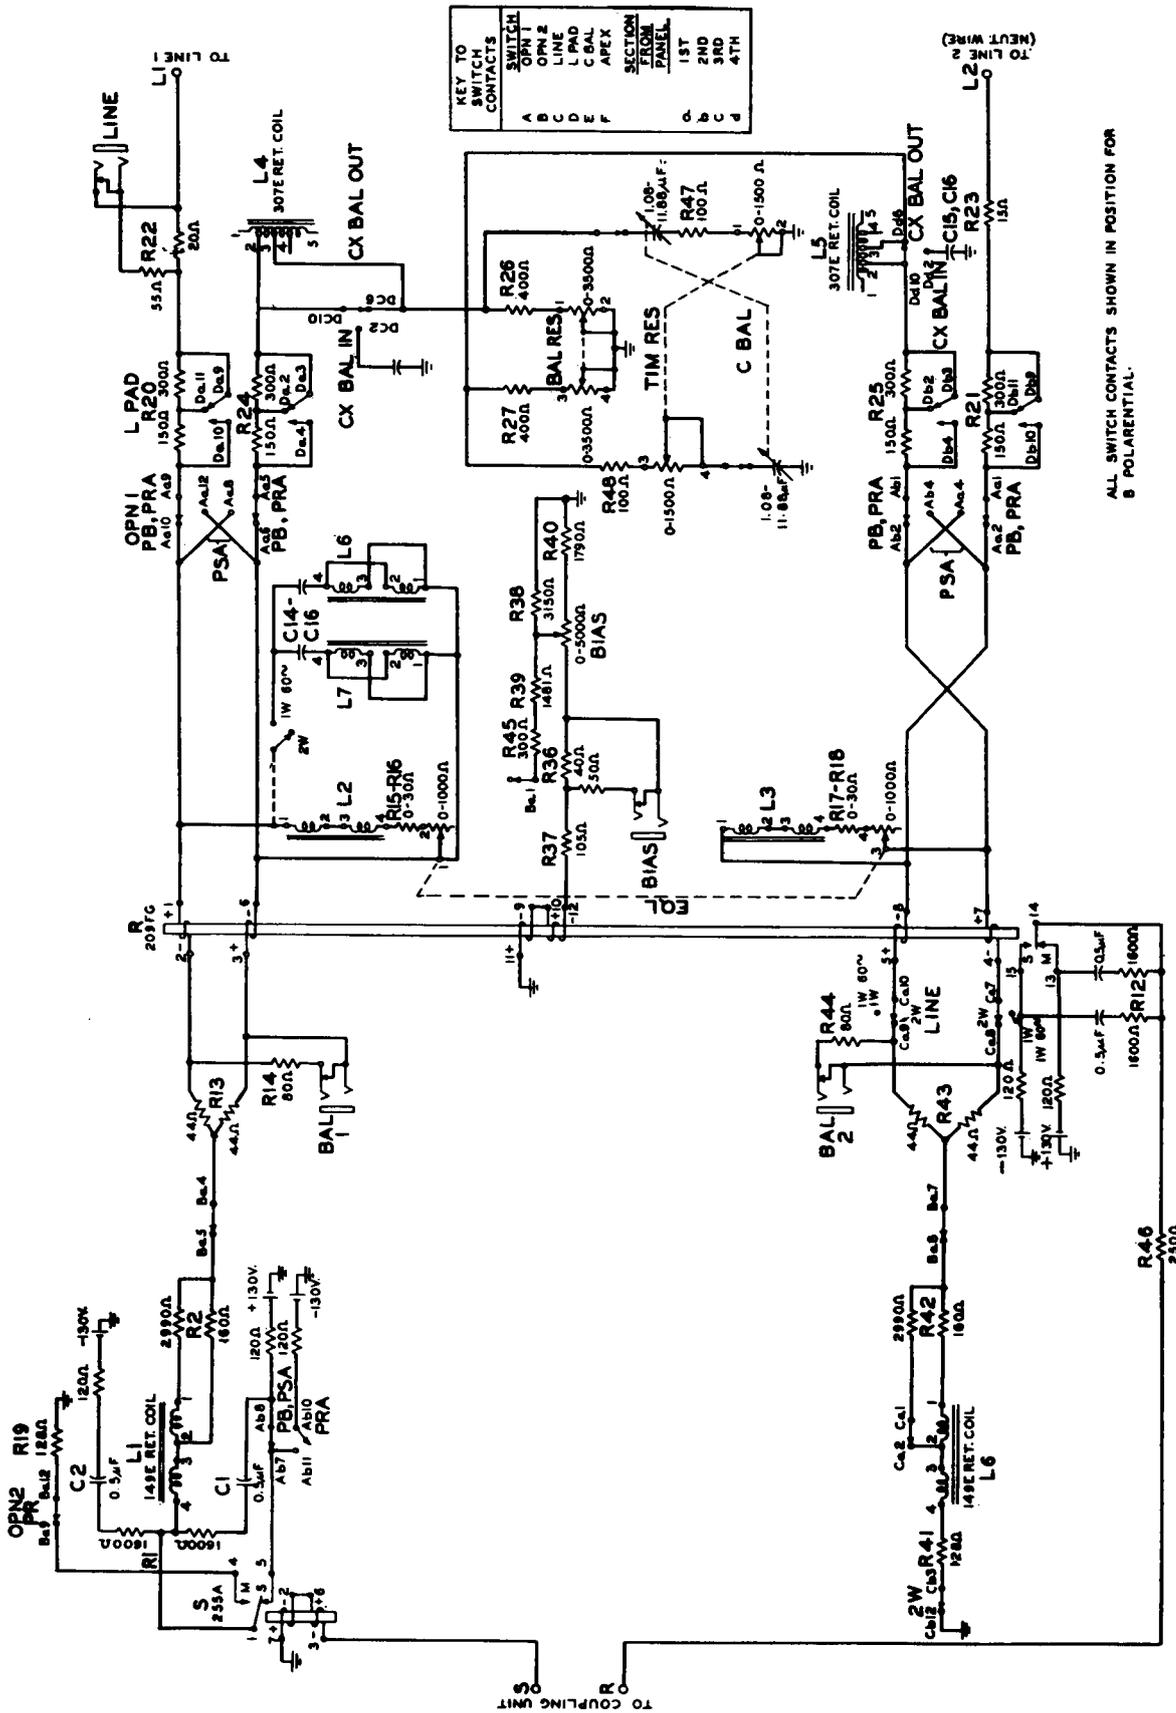

Revised Fig. 14—Polarential Polar Receiving