

PRIVATE LINE SERVICE TERMINATIONS
STATION ENGINEERING INFORMATION
STATION EQUIPMENT (DATA-VOICEBAND)

1. GENERAL

1.001 This addendum supplements Section 812-002-230, Issue 3.

1.002 This addendum is reissued to delete a Caution and add a Note in Fig. 11, 12, and 13.

2. CHANGES TO SECTION

2.001 On Pages 34 and 35, Fig. 11, 12, and 13, delete Caution and add Note as follows:


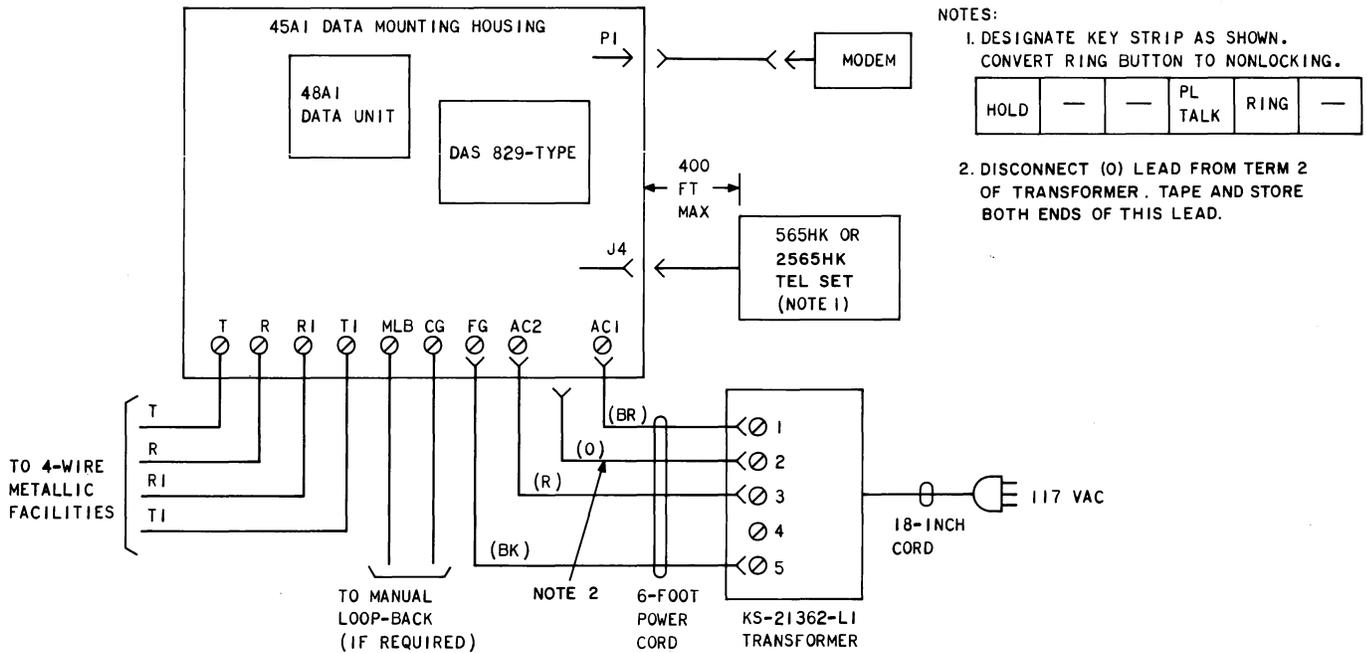


Fig. 11—Diagram for Full Data-Alternate Voice at Station

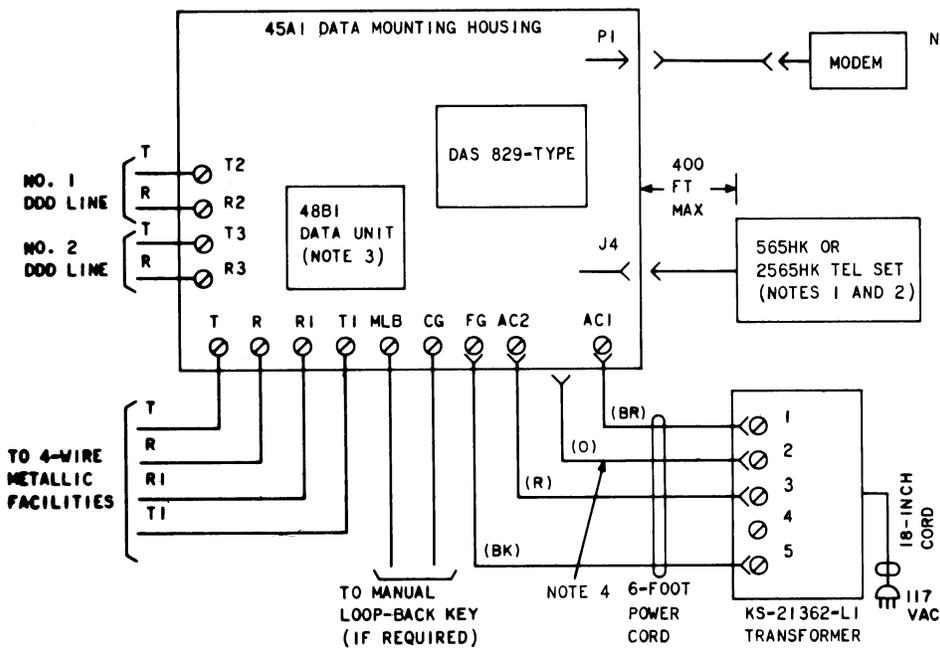

NOTES:

- DESIGNATE KEY STRIP AS SHOWN. CONVERT REL BUTTON TO NONLOCKING.


HOLD	DDDI	DDD2	—	—	REL
------	------	------	---	---	-----

- MODIFY TEL SET AS FOLLOWS:

636A KEY LEADS		
COLOR	REMOVE FROM	CONNECT TO
BR	M	X
S-R	M	N
Y	M	TAPE AND STORE
O-BK	N	M

- INSTALL REQUIRED "SLOPE EQUAL" OPTION.
- DISCONNECT (O) LEAD FROM TERM 2 OF TRANSFORMER. TAPE AND STORE BOTH ENDS OF THIS LEAD.

Fig. 12—Diagram for Full-Dial Backup at Station

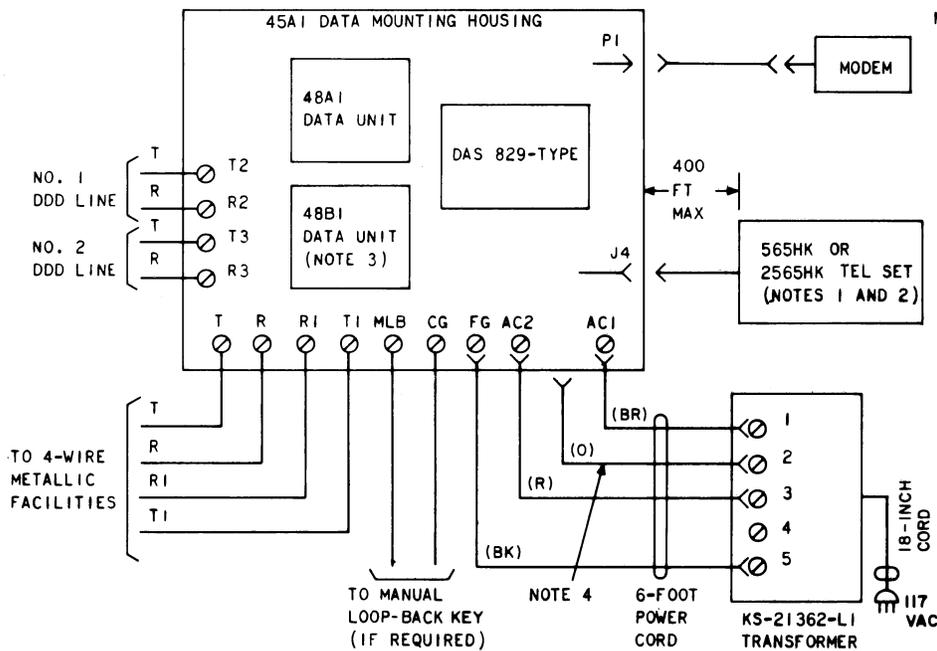

NOTES:

- DESIGNATE KEY STRIP AS SHOWN. CONVERT RING AND REL BUTTON TO NONLOCKING.

HOLD	DDDI	DDD2	PL TALK	RING	REL
------	------	------	---------	------	-----

- MODIFY TEL SET AS FOLLOWS:

636A KEY LEADS		
COLOR	REMOVE FROM	CONNECT TO
BR	M	X
S-R	M	N
Y	M	TAPE AND STORE
O-BK	N	M

- INSTALL REQUIRED "SLOPE EQUAL" OPTION.
- DISCONNECT (O) LEAD FROM TERM 2 OF TRANSFORMER. TAPE AND STORE BOTH ENDS OF THIS LEAD.

Fig. 13—Diagram for Full Data with Alternate Voice and Dial Backup at Station