


DESIGNED BY: J. W. BONGER
 DRAWN BY: J. W. BONGER
 CHECKED BY: J. W. BONGER
 DATE: 3-14-63
 ISSUE: 1L
 CHANGED: DIV LINE BET. RING. & NET. WAS LOC. VERT. BET. TERM. C & TERM. A & K
 PR. 591454-AIC
 6-27-63
 CHANGED: BK & R-G LEADS FROM 25B3 DIAL WERE BK-BK & V-V RESP.
 DDD. 591522-A1
 8-8-63

- NOTES:
- WHEN A 617A KEY IS PART OF THE TELEPHONE SET, ATTACH THE SPADE-TIPPED CONDUCTOR OF THIS KEY TO THE SG TERMINAL ON THE MOUNTING CORD TERMINAL STRIP. REMOVE THE SPADE-TIPPED STRAP FROM THE CG OR 2A TERMINAL ON THE STRIP.
 - DEAD DRESS THESE SPADE TIPPED LEADS PER A-850071-39 AND STORE.

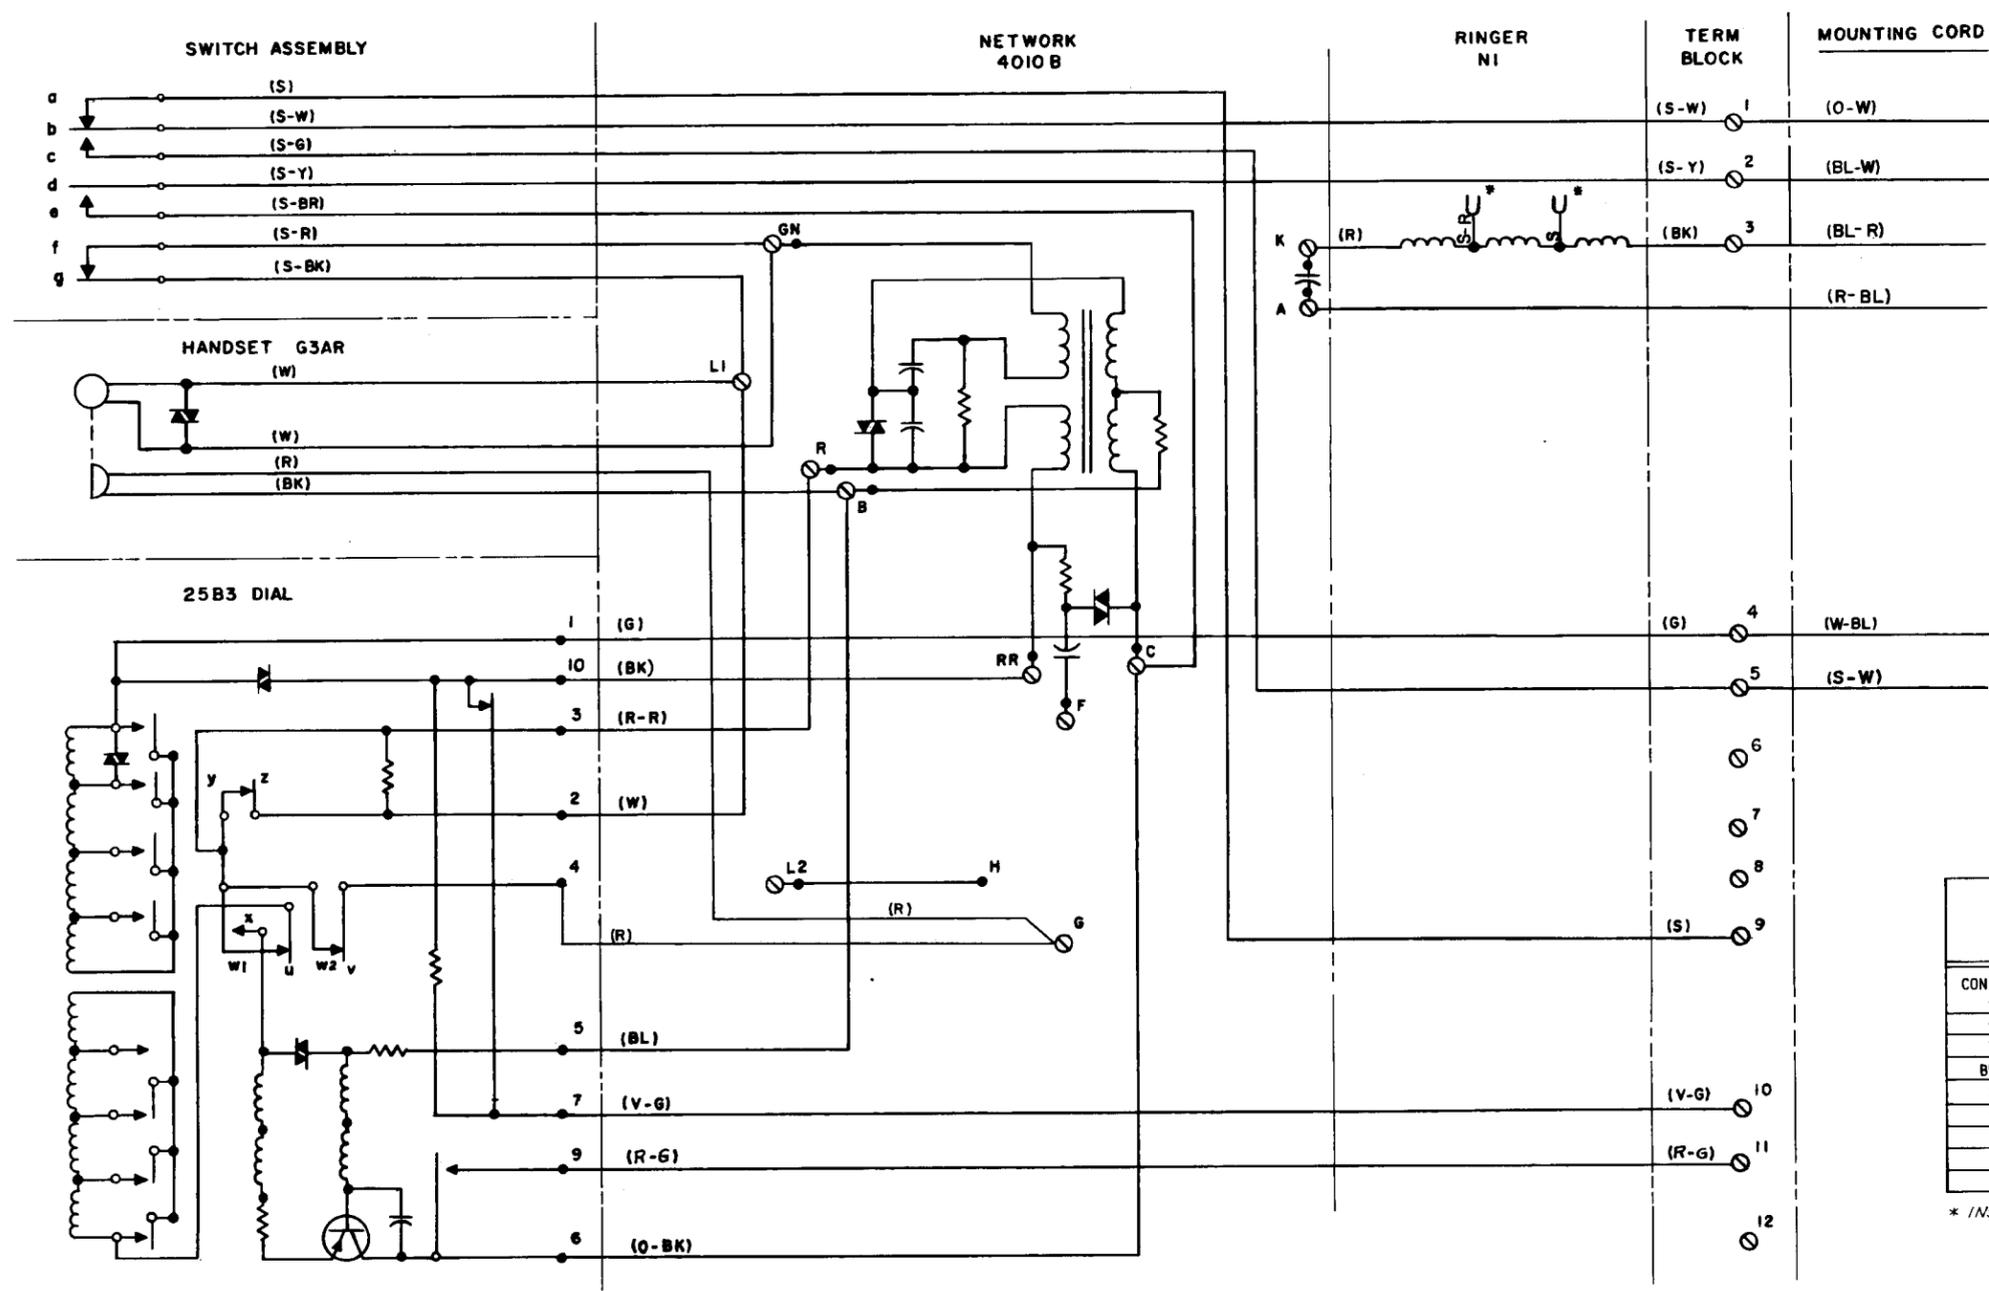

667B TRANSMITTER
CONNECTIONS TO TELEPHONE SET

| CONDUCTOR COLOR | TERMINATION |
|-----------------|-------------|
| O-V | TERM 1 TB1 |
| Y-BL | TERM 10 TB1 |
| BL-Y | TERM 2 TB1 |
| O-Y | TERM 5 TB1 |
| Y-O | TERM 9 TB1 |
| Y-G | TERM 11 TB1 |
| G-Y | TERM 12 TB1 |

* INSULATE AND STORE

MATERIAL FINISH

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED: TO 3 DECIMAL PLACES & AS ANGLES & TO 2 DECIMAL PLACES & FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 16.002, PART 2, SECTION 237.

WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURE

6S A-580118

A-580118