

A-580120

3-14-63 ISSUE 1
 CHANGED: DIV LINE
 DET. RING. & MET.
 W/15 LDC VERT. DET
 TERM. C & TERM.
 A & K


6-27-63 2
 CHANGED: BK & R-G
 LEADS FROM 25B3
 DIAL WERE BK-BK
 & V-V RESP

8-8-63 3
 CHANGED: R-G & V-V
 DIAL LEADS WERE
 R-R & R-G RESP
 ADDED: AT DIAL VAR
 AT 0

REMOVED: AT DIAL,
 SW CONT AT 0

12-19-63 4

- NOTES:
1. WHEN A 617A KEY IS PART OF THE TELEPHONE SET, ATTACH THE SPADE-TIPPED CONDUCTOR OF THIS KEY TO THE SG TERMINAL ON THE MOUNTING CORD TERMINAL STRIP. REMOVE THE SPADE-TIPPED STRAP FROM THE CG OR 2A TERMINAL ON THE STRIP.
 2. DEAD DRESS THESE SPADE TIPPED LEADS PER A-850071-39 AND STORE.

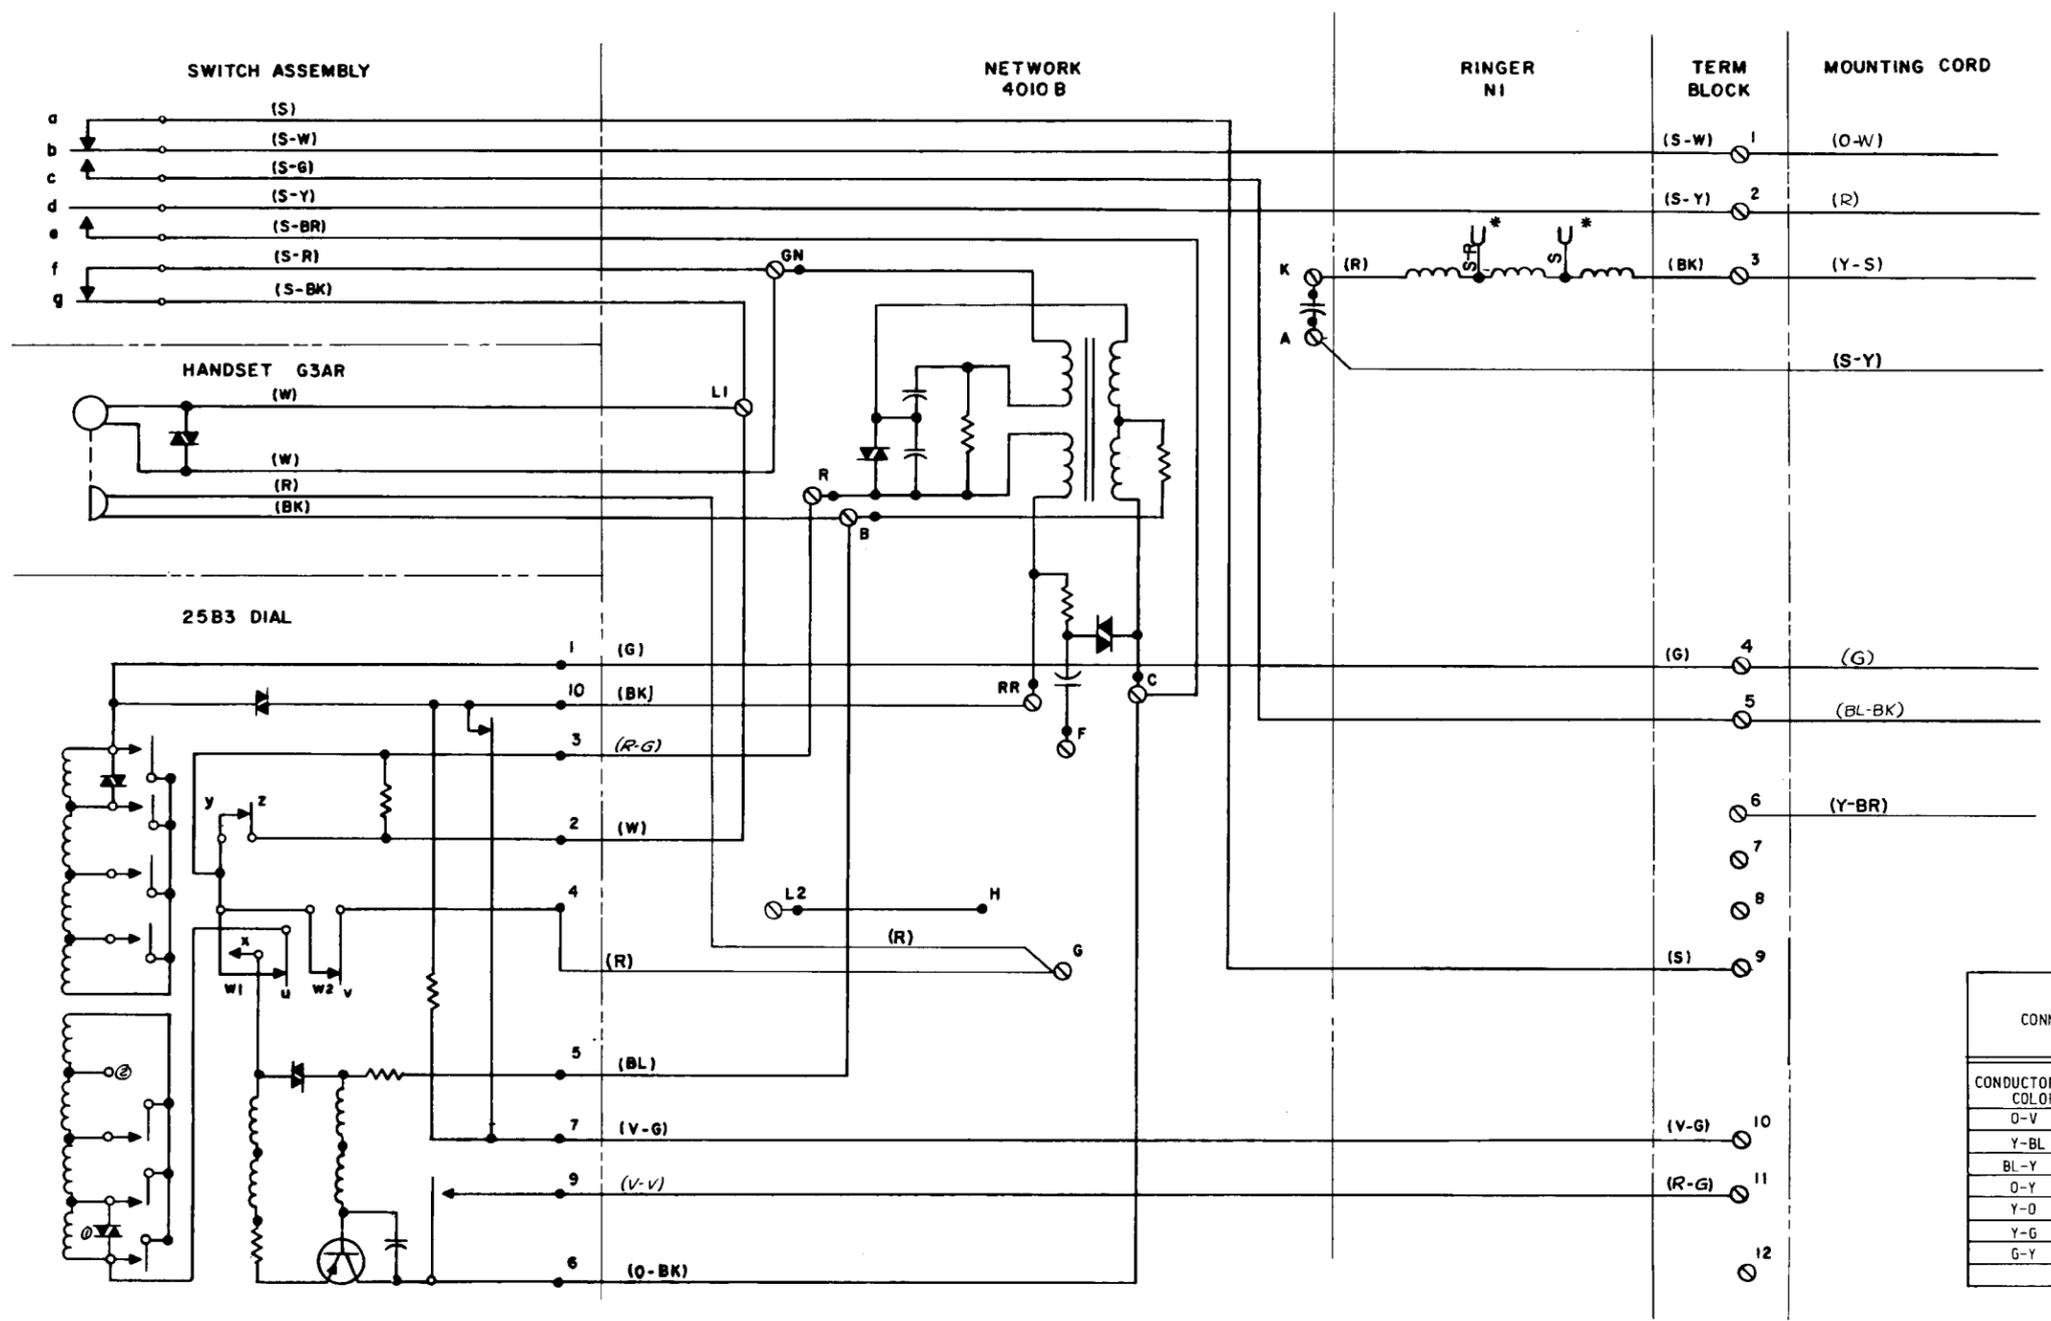

667B TRANSMITTER
 CONNECTIONS TO TELEPHONE
 SET

CONDUCTOR COLOR	TERMINATION
O-V	TERM 1 TB1
Y-BL	TERM 10 TB1
BL-Y	TERM 2 TB1
O-Y	TERM 5 TB1
Y-O	TERM 9 TB1
Y-G	TERM 11 TB1
G-Y	TERM 12 TB1

MATERIAL FINISH

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. UNLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:

TO 3 DECIMAL PLACES ± AS ANGLES ±

TO 3 DECIMAL PLACES ±

FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 16.003, PART 2, SECTION 237.

SCALE NONE

WESTERN ELECTRIC CO. INC.
 ENGINEER OF MANUFACTURE

1632C TEL SET A-580105
 USED ON DWG

1632 TYPE
 TELEPHONE SET
 CONNECTING
 DIAGRAM

SCALE NONE

WESTERN ELECTRIC CO. INC.
 ENGINEER OF MANUFACTURE

6S A-580120

* INSULATE AND STORE

A-580120