

PATCHING AND TESTING CORD ASSEMBLIES
2-CONDUCTOR CORDS

1. GENERAL

1.01 This section lists and illustrates the standard 2-conductor patching and testing cord assemblies required for the patching and testing of equipment in central offices.

1.02 For convenience in ordering patching and testing cord assemblies, combination apparatus codes as shown in the upper left-hand corner of each item have been established. These codes should be used in all cases for ordering the complete assemblies shown.

1.03 When a part of an assembly is desired for replacing purposes and the part is covered by an individual apparatus code or part number shown below the combination assembly code number, the part should be ordered by the individual apparatus code or part number as specified. When ordering a part give both the part number (piece part or apparatus code) and the name of the part, for example, P-44B490 plug. Do not include any information in parentheses.

1.04 There are some assemblies in which the cord itself is not assigned an apparatus code. In such cases, the combination apparatus code must be used in ordering replacements.

1.05 Assemblies in which the individual cords are not covered by apparatus codes are assigned codes such as:

CORD, W2BL

All other assemblies are assigned codes such as:

CORD, 2P1A or 2W2A

where the first letter is always preceded by a numeral. In this latter case, the first numeral indicates the number of conductors in the cord and the first letter indicates whether it is a patching or a testing cord; that is, P means a patching cord (a cord equipped with plugs at both ends) and W means a testing cord. The remainder of the code is used to identify a particular assembly in a group.

1.06 Information pertaining to the relation of plugs and jacks and for ordering plugs separately is covered in Section A710.059.

1.07 Unless otherwise specified, cord conductors have a nominal resistance of 0.2 ohm per conductor foot.

2. 2-CONDUCTOR PATCHING CORDS

CORD, 2P1A

1 P2A cord, 6 inches long, equipped with:
2 No. 347A plugs

CORD, 2P1B

1 P2A cord, 2 feet long, equipped with:
2 No. 347A plugs

CORD, 2P1C

1 P2A cord, 4 feet long, equipped with:
2 No. 347A plugs

CORD, 2P1D (Replaces the No. 2P2B cord)

1 P2A cord, 6 feet long, equipped with:
2 No. 347A plugs

CORD, 2P2A

1 P2A cord, 3 feet long, equipped with:
2 No. 347A plugs


CORD, 2P2B "Mfr. Disc."
(Replaced by the No. 2P1D cord)

CORD, 2P3A

1 P2A cord, 3 feet long, equipped with:
2 No. 347B plugs

CORD, 2P3B

1 P2A cord, 6 feet long, equipped with:
2 No. 347B plugs



CORD, 2P4A


- 1 P2B cord, 3 feet long, equipped with:
- 2 No. 310 plugs

CORD, 2P4B

- 1 P2B cord, 4 feet long, equipped with:
- 2 No. 310 plugs

CORD, 2P4C

- 1 P2B cord, 6 feet long, equipped with:
- 2 No. 310 plugs




CORD, 2P5A

- 1 P2B cord, 3 feet long, equipped with:
- 1 No. 310 plug and
- 1 No. 257A plug




CORD, 2P6A

- 1 P2AH cord, 10 feet long, equipped with:
- 1 No. 309 plug and
- 1 No. 310 plug




CORD, 2P7A

- 1 P2G cord, 10 feet long, equipped with:
- 1 No. 309 plug with red shell and
- 1 No. 309 plug with black shell

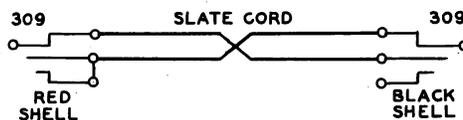

CORD, 2P8A

- 1 P2H cord, 10 feet long, equipped with:
- 1 No. 310 plug with red shell and
- 1 No. 310 plug with black shell

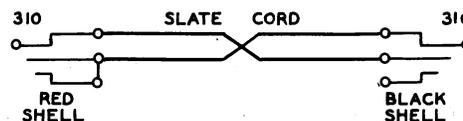

CORD, 2P9A


- 1 P2J cord, 9 feet long, equipped with:
 - 2 No. 310 plugs with red shells
- Res. 0.02 ω /ft

CORD, 2P9B

- 1 P2J cord, 6 feet long, equipped with:
 - 2 No. 310 plugs with red shells
- Res. 0.02 ω /ft

CORD, 2P9C

- 1 P2J cord, 6 feet long, equipped with:
 - 2 No. 310 plugs with black shells
- Res. 0.02 ω /ft




CORD, 2P10A

- 1 P2P cord, 10 feet long, equipped with:
- 1 No. 309 plug with red shell and
- 1 No. 310 plug with red shell


CORD, 2P10B

- 1 P2P cord, 10 feet long, equipped with:
- 1 No. 309 plug with black shell and
- 1 No. 310 plug with black shell

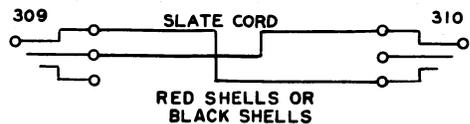


CORD, 2P11A

- 1 P2R cord, 19 feet 6 inches long, equipped with:
- 1 No. 234 plug and
- 1 No. 347A plug

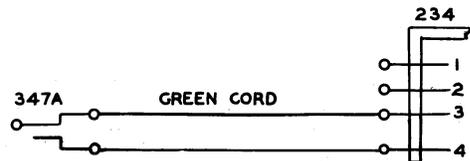

CORD, 2P12A

- 1 P2T cord, 6 feet long, equipped with:
- 1 No. 241A plug and
- 1 No. 347A plug

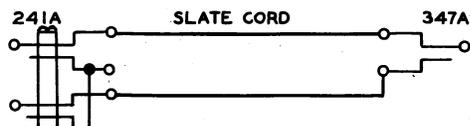


CORD, 2P13A
 1 P2AA cord, 3 feet long, equipped with:
 2 No. 241A plugs

CORD, 2P13B
 1 P2AA cord, 6 feet long, equipped with:
 2 No. 241A plugs


CORD, 2P13C
 1 P2AA cord, 15 feet long, equipped with:
 2 No. 241A plugs

CORD, 2P13D
 1 P2AA cord, 2 feet long, equipped with:
 2 No. 241A plugs


CORD, 2P14A
 1 P2AA cord, 3 feet long, equipped with:
 2 No. 241B plugs

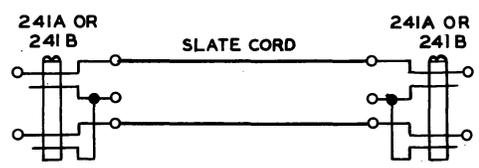

CORD, 2P15A
 1 P2AD cord, 6 feet long, equipped with:
 1 No. 338A plug and
 1 No. 310 plug

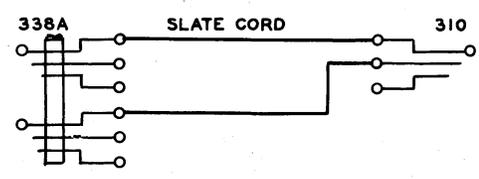

CORD, 2P16A
 1 P2AE cord, 4 feet long, equipped with:
 1 No. 310 plug and
 1 No. 289B plug
 Res. 0.006 ω /ft

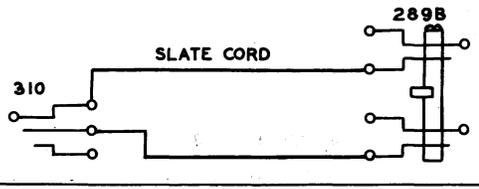

CORD, 2P17A "Mfr. Disc."
 (Replaced by the No. 2P21A cord)


CORD, 2P18A "Mfr. Disc."
 (Replaced by the No. 2P22A cord)

CORD, 2P19A "Mfr. Disc."
 (Replaced by the No. 2P20A cord)


CORD, 2P20A (Replaces the No. 2P19A cord)
 1 P2AK cord, 8 feet long, equipped with:
 2 No. 347B plugs
 Res. 0.006 ω /ft




CORD, 2P21A (Replaces the No. 2P17A cord)
 1 P2AL cord, 8 feet long, equipped with:
 2 No. 327A plugs

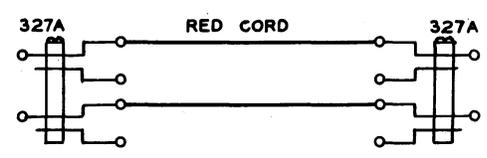


CORD, 2P22A (Replaces the No. 2P18A cord)
 1 P2AM cord, 8 feet long, equipped with:
 1 No. 327A plug and
 1 No. 309 plug with black shell

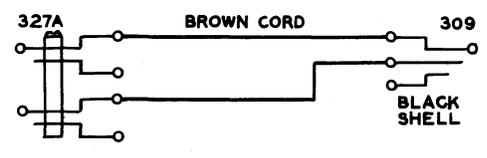


CORD, 2P23A
 1 P3D cord, 6 feet long, equipped with:
 2 No. 309 plugs



CORD, 2P24A
 1 P2A cord, 6 feet long, equipped with:
 1 No. 347A plug,
 1 No. 157A gauge, and
 1 No. 121A cord weight




CORD, 2P25A
 1 P2AR cord, 4 feet long, equipped with:
 1 No. 347A plug and
 2 No. 347B plugs

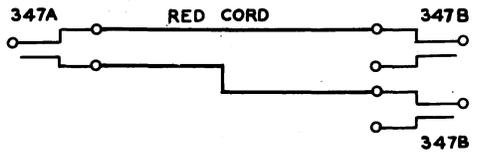

CORD, 2P27A

1 P2BL cord, 6 feet long, equipped with:

- 1 No. 327A plug and
- 1 No. 310 plug

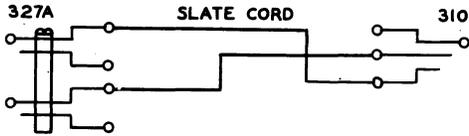


→ CORD, 2P28A

1 P2CM cord, 10 feet long, equipped with:

- 1 No. 7464 Hubbell connector body and
- 1 No. 310 plug with black shell

Res. 0.006 ω /ft

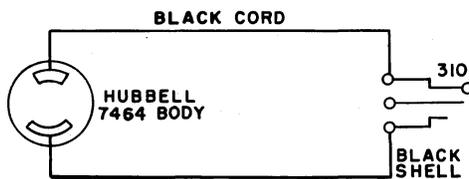


→ CORD, 2P29A

1 P2CN cord, 6 feet long, equipped with:

- 1 No. 7464 Hubbell connector body and
- 1 No. 7479 Hubbell plug cap


Res. 0.006 ω /ft

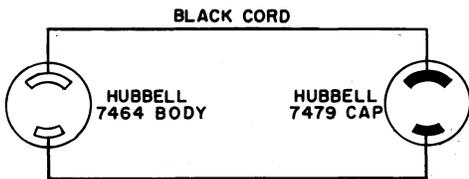

→ CORD, 2P30A

1 P2CP cord, 15 feet long, equipped with:


- 1 No. 310 plug and
- 1 No. 347B plug



→ CORD, P2AT

6 feet or 10 feet long
(Order Length As Required)

Res. 0.016 ω /ft




The code of the cord includes one No. 358A plug, one No. 466B jack, and one No. 1A cushion.

→ CORD, P2AU

10 inches long

Res. 0.016 ω /ft




The code of the cord includes two No. 466B jacks.

→ CORD, P2AW

6 inches, 1 foot 6 inches, 3 feet, 6 feet
or 10 feet long
(Order Length As Required)

Res. 0.016 ω /ft

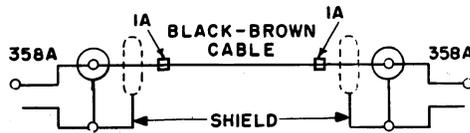


The code of the cord includes two No. 358A plugs and two No. 1A cushions.

→ CORD, P2BA

4 feet long


Res. 0.016 ω /ft

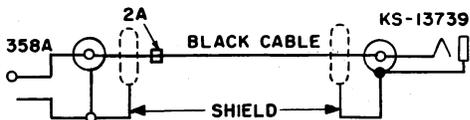

The code of the cord includes one No. 358A plug, one No. 2A cushion, and one KS-13739 jack (coaxial connector approximately 9/16" in diameter x 1-1/8" long) arranged to work with the KS-13737 plug. The cord is primarily intended for use in TE radio systems.

→ CORD, P2BB


6 feet long
Res. 0.016 ω /ft

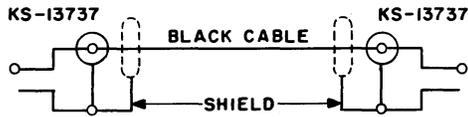

The code of the cord includes two KS-13737 plugs (coaxial connectors approximately 9/16" in diameter x 1-1/16" long) arranged to work with KS-13738 or similar jacks. The cord is primarily intended for use in TE radio systems.

→ CORD, P2BC


4 feet long
Res. 0.016 ω /ft

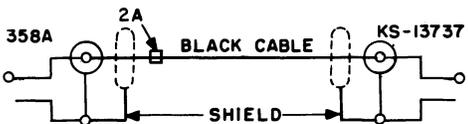

The code of the cord includes one No. 358A plug, one No. 2A cushion, and one KS-13737 plug (coaxial connector approximately 9/16" in diameter x 1-1/16" long) arranged to work with KS-13738 or similar jacks. The cord forms part of the B coaxial cord kit.

→ CORD, P2BD


25 feet long
Res. 0.01 ω /ft

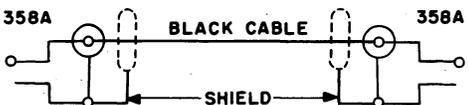

The code of the cord includes two No. 358A plugs.

→ CORD, P2BE


600 feet long
Res. 0.01 ω /ft

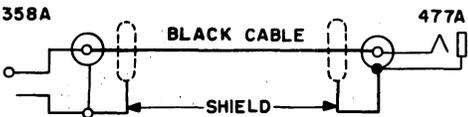

The code of the cord includes one No. 358A plug and one No. 477A jack.

→ CORD, P2BH


12 feet long
Res. 0.006

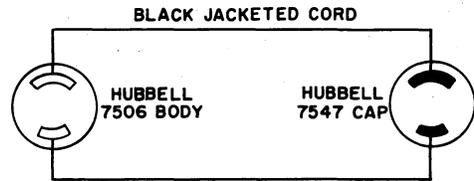

The code of the cord includes one No. 7506 Hubbell connector body and one No. 7547 Hubbell plug cap. Primarily intended for use in the No. 5 crossbar telephone offices.

→ CORD, P2BJ


2 feet, 4 feet, 6 feet, or 8 feet long
(Order Length As Required)
Res. 0.011 ω /ft

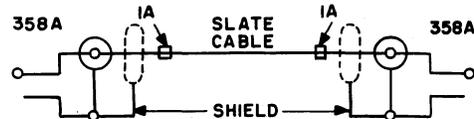

The code of the cord includes two No. 358A plugs and two No. 1A cushions.

→ CORD, P2BM


3 feet or 13 feet long
(Order Length As Required)

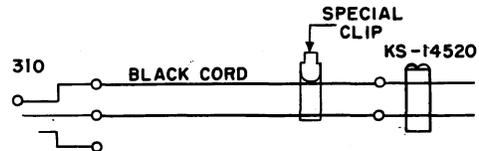

The code of the cord includes one No. 310 plug, one KS-14520 plug, and one special cord support clip. The KS-14520 plug is arranged to work with the KS-14519 jack. The cord is primarily intended for testing 2400- or 2600-cycle single frequency signal units in toll systems.

→ CORD, P2BN

13 feet long

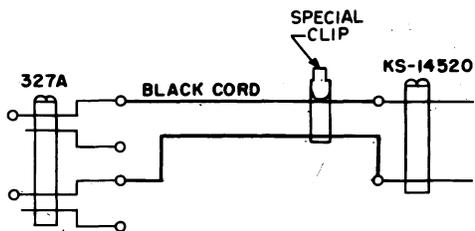


The code of the cord includes one No. 327A plug, one KS-14520 plug, and one special cord support clip. The KS-14520 plug is arranged to work with the KS-14519 jack. The cord is primarily intended for testing 2400- or 2600-cycle single frequency signal units in toll systems.

→ CORD, P2BS

1 foot long

Res. 0.01 ω /ft

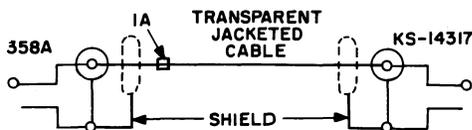


The code of the cord includes one No. 358A plug, one No. 1A cushion, and one KS-14317 plug. The KS-14317 plug is arranged to work with the KS-14318 or similar jacks. The cord is primarily intended for use with the No. 90A test set in the L3 carrier system.

→ CORD, P2BP

3 feet 2 inches long

Res. 0.016 ω /ft

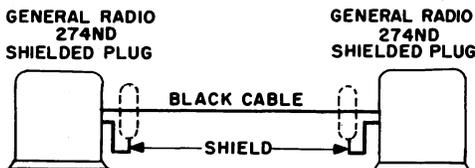


The code of the cord includes two No. 274ND General Radio Co. modified, shielded plugs. The cord is primarily intended for use with the J98705U servicing center test set for type O carrier system.

→ CORD, P2BT

1 foot, 5 feet, or 50 feet long
(Order Length As Required)

Res. 0.001 ω /ft.

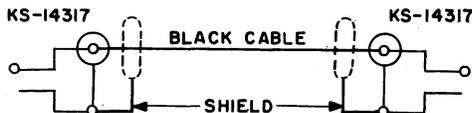


The code of the cord includes two KS-14317 plugs. The KS-14317 plug is arranged to work with the KS-14318 or similar jacks. The cord is primarily intended for use in the L3 carrier system.

→ CORD, P2BR

15 feet, 25 feet, or 45 feet long
(Order Length As Required)

Res. 0.01 ω /ft

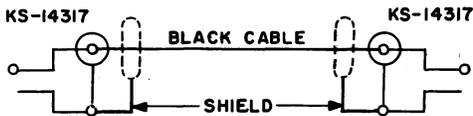

The code of the cord includes two KS-14317 plugs. The KS-14317 plug is arranged to work with the KS-14318 or similar jacks. The cord is primarily intended for testing auxiliary and equalizing auxiliary repeaters in the L3 carrier system.

→ CORD, P2BU

600 feet


Res. 0.01 ω /ft



The code of the cord includes one KS-14317 plug and one KS-14982 jack. The KS-14317 plug is arranged to work with the KS-14318 or similar jacks. The KS-14982 jack is arranged to work with the KS-14317 plug. The cord is primarily intended for use in the L3 carrier system.

→ CORD, P2BW


50 feet long wound in a coil approximately 16 inches in diameter
Res. 0.011 ω /ft

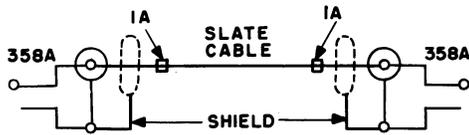

The code of the cord includes two No. 358A plugs and two No. 1A cushions.

→ CORD, P2CC

2 feet long

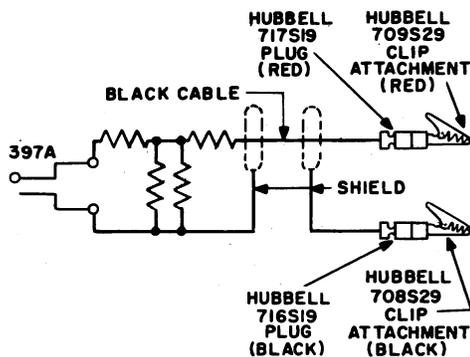

The code of the cord includes one No. 397A plug, one Hubbell No. 716S19 interlock plug (black), one Hubbell No. 717S19 interlock plug (red), one Hubbell No. 708S29 alligator clip attachment (black), and one Hubbell No. 709S29 alligator clip attachment (red). The cord is primarily intended for use with the J98705U servicing center test set for testing N and O carrier equipment.

Res. between tip of plug and red clip is 3137 $\pm 1\%$ ohms


Res. between tip of plug and black clip is 131 $\pm 1\%$ ohms

Res. between sleeve of plug and red clip is 3014 $\pm 1\%$ ohms

→ CORD, P2CD

6 inches long


Res. 0.016 ω /ft

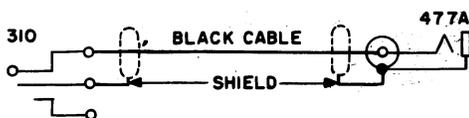

The code of the cord includes one No. 310 plug and one No. 477A jack.

→ CORD, P2CF


4 feet long

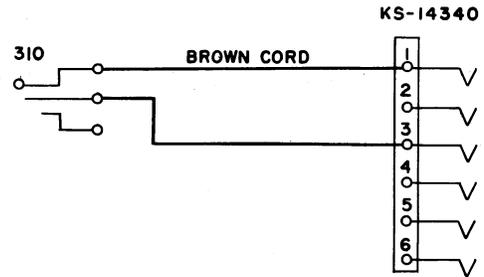

The code of the cord includes one No. 310 plug and one KS-14340 connector. The KS-14340 connector is arranged to work with the KS-14297 connector. The cord is primarily intended for use with the No. 35F test set in TD-2 radio systems.

→ CORD, P2CH

6 feet long

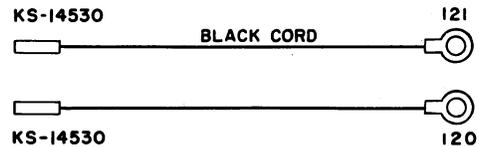


The code of the cord includes two KS-14530 connectors, one No. 121 cord tip, and one No. 120 cord tip. The KS-14530 connector is 1-1/2" long x 5/16" diameter. The cord is primarily intended for use in adjusting the multifrequency pulse signal receiver in common systems.

→ CORD, P2CJ

5 feet 6 inches long

Res. 0.016 ω /ft

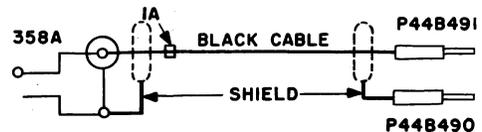


The code of the cord includes one No. 358A plug, one No. 1A cushion, one P-44B490 plug (banana type 1-3/8" long, black), and one P-44B491 plug (banana type, 1-3/8" long, red). The cord is primarily intended for use with the J64038A transmission measuring set.

→ CORD, P2CS

"Mfr Disc."

→ CORD, P2CT

4 feet long
Res. 0.016 ω/ft

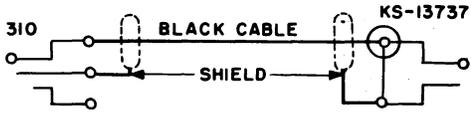

The code of the cord includes one No. 310 plug and one KS-13737 plug (coaxial plug, 9/16" in diameter x 1-1/16" long) arranged to work with KS-13738 or similar jacks. The cord is primarily intended for use with the TJ radio IF test set J68376B.


CORD, D-175432 "Mfr. Disc."

3. 2-CONDUCTOR TESTING CORDS

CORD, 2W1A "Mfr. Disc."

CORD, 2W2A


1 L2K cord, 4 feet long, equipped with:
1 No. 289B plug

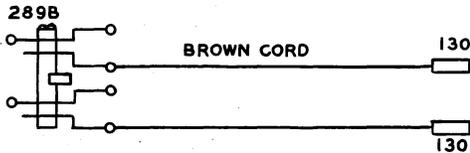

The individual code of the cord includes two No. 130 cord tips.

CORD, 2W3A


1 P2AA cord, 3 feet long, equipped with:
1 No. 241A plug

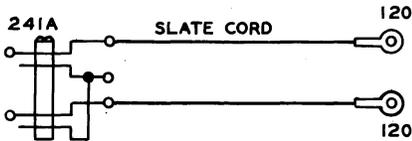

The individual code of the cord includes two No. 120 cord tips.

CORD, 2W4A

1 R2CF cord, 6 feet long, equipped with:
1 No. 310 plug



The individual code of the cord includes two No. 130 cord tips.


CORD, 2W5A

1 S2B slate cord, 6 feet long, equipped with:

1 No. 310 plug

CORD, 2W5B

1 S2B red cord, 10 feet long, equipped with:



The individual code of the cord includes two No. 131 cord tips.

CORD, 2W6A

1 W2C cord, 10 feet long, equipped with:

1 No. 310 plug



The individual code of the cord includes two No. 59 cord tips.

CORD, 2W7A


1 W2F cord, 9 feet 6 inches long, equipped with:

1 No. 347A plug

CORD, 2W8A

1 W2F cord, 9 feet 6 inches long, equipped with:

1 No. 347B plug

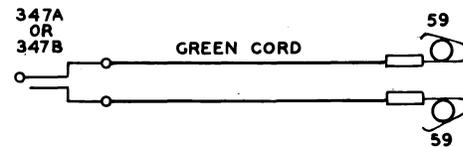

The individual code of the cord includes two No. 59 cord tips.

CORD, 2W9A

1 W2J cord, 9 feet 6 inches long, equipped with:

1 No. 310 plug



The individual code of the cord includes two No. 29 cord tips.

CORD, 2W10A "Mfr. Disc."
(Replaced by the No. 2W27A cord)

CORD, 2W11A

1 W2L cord, 5 feet long, equipped with:

1 No. 309 plug



The individual code of the cord includes two No. 35 cord tips.

CORD, 2W12A

1 W2M cord, 9 feet long, equipped with:

1 No. 310 plug with red shell


Res. 0.02 ω /ft

CORD, 2W12B

1 W2M cord, 9 feet long, equipped with:

1 No. 310 plug with black shell

Res. 0.02 ω /ft

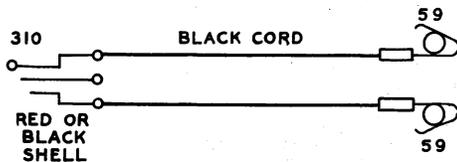


The individual code of the cord includes two No. 59 cord tips.

CORD, 2W13A

1 W2R cord, 6 feet long, equipped with:

1 No. 310 plug

Res. 0.02 ω /ft




The individual code of the cord includes two No. 37 cord tips.

CORD, 2W14A

"A&M Only"

1 W2S cord, 2 feet 6 inches long, equipped with:

1 No. 241A plug

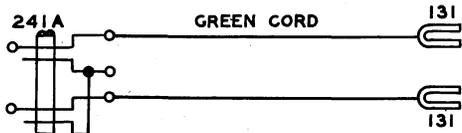

The individual code of the cord includes two No. 131 cord tips.

CORD, 2W15A


1 W2BP cord, 2 feet 6 inches long, equipped with:

1 No. 241A plug

CORD, 2W15B

1 W2BP cord, 6 feet long, equipped with:

1 No. 241A plug

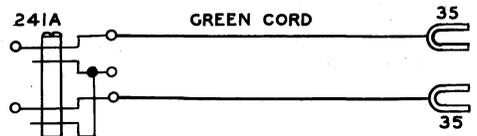


The individual code of the cord includes two No. 35 cord tips.

CORD, 2W16A

1 W2T cord, 9 feet long, equipped with:

1 No. 310 plug

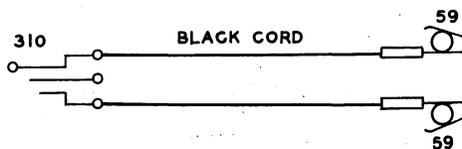

The individual code of the cord includes two No. 59 cord tips.

CORD, 2W17A

- 1 W2W cord, 6 feet long, equipped with:
 - 1 No. 310 plug,
 - 1 No. 360B tool, and
 - 1 No. 360C tool

CORD, 2W17B


- 1 W2W cord, 30 feet long, equipped with:
 - 1 No. 310 plug,
 - 1 No. 360B tool, and
 - 1 No. 360C tool

CORD, 2W17C

- 1 No. 310 plug,
- 1 No. 360B tool, and
- 1 No. 360C tool

CORD, 2W17D

- 1 W2CF cord, 1 foot long, equipped with:
 - 1 No. 310 plug,
 - 1 No. 360B tool, and
 - 1 No. 360C tool



CORD, 2W18A


"Mfr. Disc."
(Replaced by the No. 2W20A cord)

CORD, 2W19A

- 1 W2AA cord, 5 feet long, equipped with:
 - 1 No. 347B plug
- Res.0.02 ω /ft

CORD, 2W20A (Replaces the No. 2W18A cord)


- 1 W2AA cord, 5 feet long, equipped with:
 - 1 No. 347A plug
- Res.0.02 ω /ft



The individual code of the cord includes two No. 35 cord tips.

CORD, 2W21A


- 1 W2AB cord, 6 feet long, equipped with:
 - 2 No. 360A tools



The individual code of the cord includes two No. 130 cord tips.


CORD, 2W22A

- 1 W2AS cord, 8 feet long, equipped with:
 - 1 No. 310 plug and
 - 1 No. 522A key

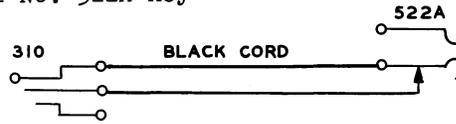

CORD, 2W24A


- 1 W2AY cord, 9 feet 6 inches long, equipped with:
 - 1 No. 289B plug

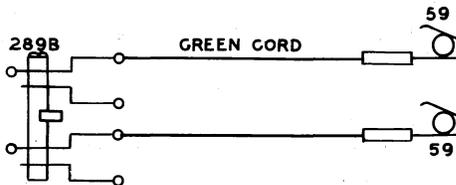

The individual code of the cord includes two No. 59 cord tips.

CORD, 2W25A


- 1 W2BB cord, 5 feet long, equipped with:
 - 1 No. 309 plug
- Res.0.04 ω /ft



The individual code of the cord includes two No. 35 cord tips.

CORD, 2W26A (Replaces the No. 2W27A cord)

- 1 W2BC cord, 5 feet 6 inches long, equipped with:
 - 1 No. 304A plug
- Res.0.004 ω /ft




The individual code of the cord includes two No. 35 cord tips.

CORD, 2W27A

"Mfr. Disc."
(Replaced by the No. 2W26A cord)

CORD, 2W28A


- 1 No. 630 cord, 5 feet 6 inches long, equipped with:
 - 1 No. 347A plug



The individual code of the cord includes two No. 29 cord tips.

CORD, 2W29A


- 1 No. R2CU cord, 6 feet long equipped with:
- 1 No. 309 plug



The individual code of the cord includes two No. 130 cord tips.

CORD, 2W30A


- 1 W2BR cord, 4 feet long, equipped with:
 - 1 No. 309 plug
- Res. 0.006 ω /ft

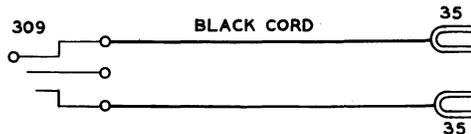

The individual code of the cord includes two No. 35 cord tips.

CORD, 2W32A


- 1 R2DB cord, 6 feet long, equipped with:
- 1 No. 347A plug



The individual code of the cord includes two No. 130 cord tips.

CORD, 2W33A


- 1 W2BS cord, 5 feet long, equipped with:
- 1 No. 310 plug

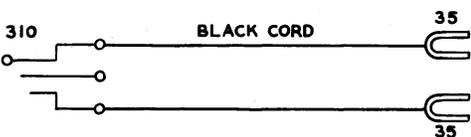

The individual code of the cord includes two No. 35 cord tips.

CORD, 2W34A


- 1 W2BN cord, 6 feet long, equipped with:
 - 1 No. 353A plug
- Res. 0.04 ω /ft

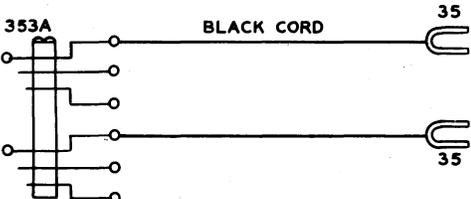

The individual code of the cord includes two No. 35 cord tips.

CORD, 2W35A


- 1 W2BY cord, 4 feet 6 inches long, equipped with:
 - 1 No. 347A plug
- Res. 0.004 ω /ft

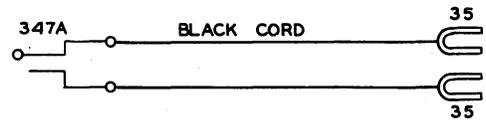

The individual code of the cord includes two No. 35 cord tips.

CORD, 2W36A


- 1 W2CA cord, 5 feet 6 inches long, equipped with:
 - 1 No. 327A plug
- Res. 0.004 ω /ft

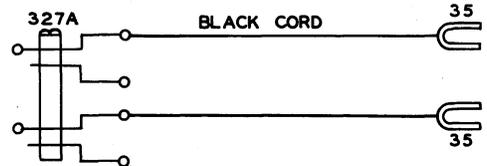

The individual code of the cord includes two No. 35 cord tips.

CORD, 2W37A


- 1 W2DB cord, 4 feet long, equipped with:
- 1 No. 471A jack

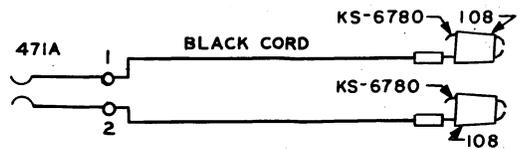

The individual code of the cord includes two KS-6780 connecting clips with two No. 108 cord tips (rubber insulators).


CORD, 2W38A

- 1 W2CK cord, 5 feet long, equipped with:
- 1 No. 310 plug and
- 1 No. 471A jack



CORD, 2W39A


- 1 W2CL cord, 4 feet long, equipped with:
- 1 No. 240A plug and
- 1 No. 471A jack

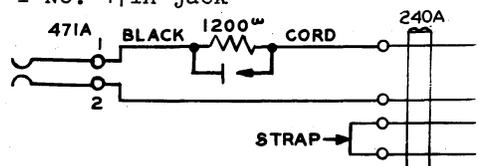

CORD, 2W40A

1 W2CL cord, 4 feet long, equipped with:


- 1 No. 240H plug and
- 1 No. 471A jack

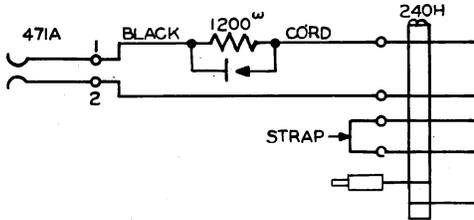

CORD, M2DS

50 feet long


Res. 0.006 Ω/ft

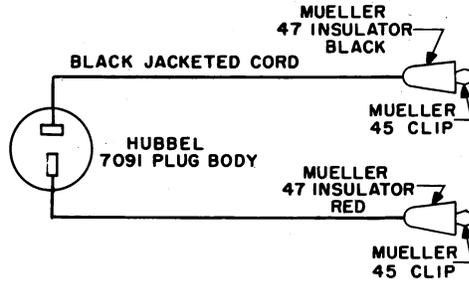

CORD, 2W41A

1 W2CJ cord, 4 feet long, equipped with:

- 1 No. 360A tool,
- 1 No. 360B tool, and
- 1 No. 471A jack

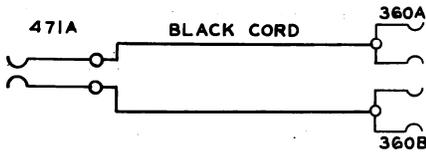


The code of the cord includes the No. 7091 Hubbell plug body, two No. 45 Mueller clips, and two No. 47 Mueller insulators, one red and one black.

CORD, 2W42A

1 W2DL cord, 5 feet-6 inches long, equipped with:


- 1 No. 310 plug

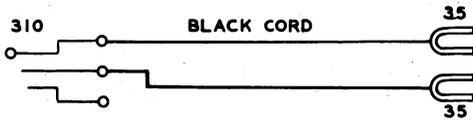

The individual code of the cord includes two No. 35 cord tips.

→ CORD, W2D

19 feet 6 inches long

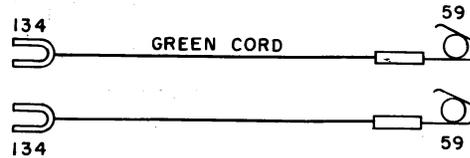


The code of the cord includes two No. 59 cord tips and two No. 134 cord tips.

→ CORD, 2W43A

1 W2EL cord, 8 feet long, equipped with:


- 1 No. 310 plug

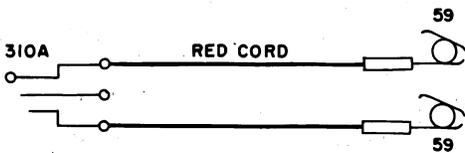

The individual code of the cord includes two No. 59 cord tips.

→ CORD, W2AE

2 feet 6 inches long

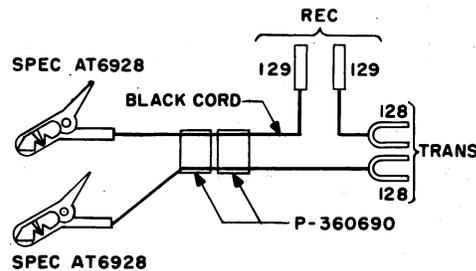


The code of the cord includes two No. 1 test clips per specification AT6928, two No. 128 cord tips, two No. 129 cord tips, and two P-360690 sleeves (fibre, sliding).

→ CORD, W2AF

4 feet long

SPEC AT6928

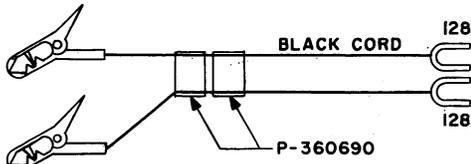


SPEC AT6928

The code of the cord includes two No. 1 test clips per specification AT6928, two No. 128 cord tips, and two P-360690 sleeves (fibre, sliding).

→ CORD, W2AK

4 feet long

SPEC AT6928

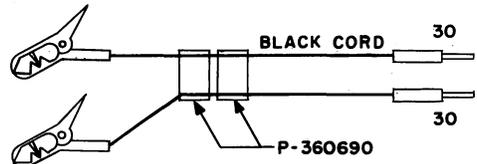


SPEC AT6928

The code of the cord includes two No. 1 test clips per specification AT6928, two No. 30 cord tips, and two P-360690 sleeves (fibre, sliding).

→ CORD, W2AG

2 feet 6 inches long

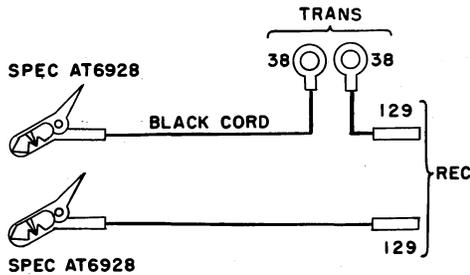


The code of the cord includes two No. 1 test clips per specification AT6928, two No. 38 cord tips, and two No. 129 cord tips.

→ CORD, W2AW

6 feet long

Res. 0.006 ω /ft.

SPEC AT6928

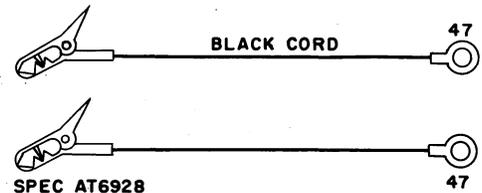


SPEC AT6928

The code of the cord includes two No. 1 test clips per specification AT6928 and two No. 47 cord tips arranged for connection to a No. 289B plug.

→ CORD, W2AJ

1 foot long

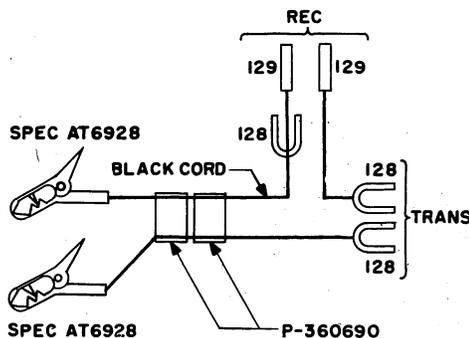


The code of the cord includes two No. 1 test clips per specification AT6928, three No. 128 cord tips, two No. 129 cord tips, and two P-360690 sleeves (fibre, sliding).

→ CORD, W2BA

4 feet long

SPEC AT6928

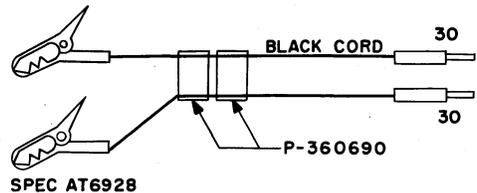


SPEC AT6928

The code of the cord includes two No. 2 test clips per specification AT6928, two No. 30 cord tips, and two P-360690 sleeves (fibre, sliding).

→ CORD, W2BE


6 feet long

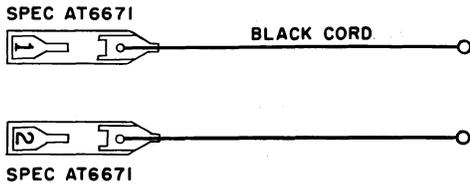

The code of the cord includes two line wire clips per specification AT6671. The free end of the cord is finished with conductors terminated in formed loops for a No. 10 screw. The cord is primarily intended for use with the No. 5 switchboard.

→ CORD, W2BF


6 feet long

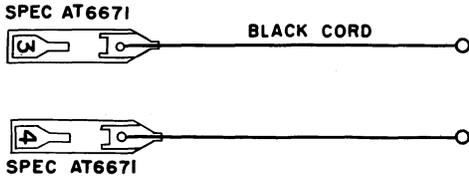

The code of the cord includes two line wire clips per specification AT6671. The free end of the cord is finished with conductors terminated in formed loops for a No. 10 screw. The cord is primarily intended for use with the No. 5 switchboard.

→ CORD, W2BG


2 feet 6 inches long

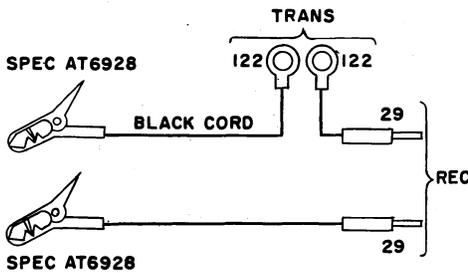

The code of the cord includes two No. 1 test clips per specification AT6928, two No. 29 cord tips, and two No. 122 cord tips.

→ CORD, W2BH


6 feet long

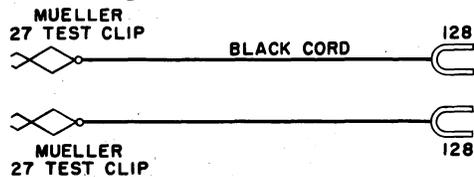

The code of the cord includes two No. 27 Mueller test clips and two No. 128 cord tips.

→ CORD, W2BJ


6 feet long

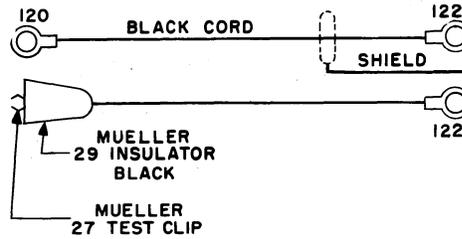

The code of the cord includes one No. 27 Mueller test clip, one No. 29 Mueller insulator, black, one No. 120 cord tip, and two No. 122 cord tips arranged for connection to a 347-type plug.

CORD, W2BL


10 feet 4 inches long

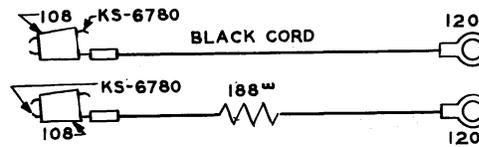

The code of the cord includes two KS-6780 connecting clips with two No. 108 cord tips (rubber insulators), and two No. 120 cord tips.

→ CORD, W2BM

1 foot 6 inches long

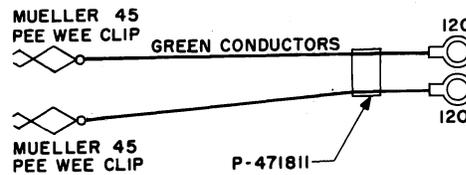


The code of the cord includes two No. 45 Mueller pee-wee clips, two No. 120 cord tips, and one P-471811 tube (sliding, flexible tubing). The cord is primarily intended for use with the KS-8089 battery gauge and No. 35 gauge.

→ CORD, W2BT

4 feet long


SPEC AT6928

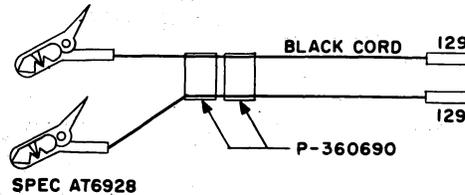

The code of the cord includes two No. 1 test clips per specification AT6928, two No. 129 cord tips, and two P-360690 sleeves (fibre, sliding).

CORD, W2CB


10 feet 4 inches long.

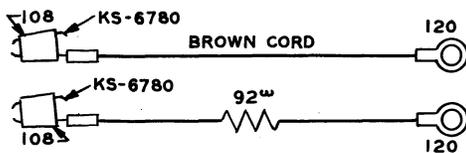

The code of the cord includes two KS-6780 connecting clips with two No. 108 cord tips (rubber insulators), and two No. 120 cord tips.

CORD, W2CT


5 feet long

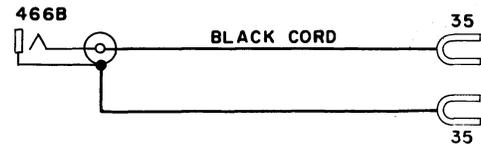Res. 0.065 ω /ft

The code of the cord includes one No. 466B jack and two No. 35 cord tips.

CORD, W2CC


8 feet long

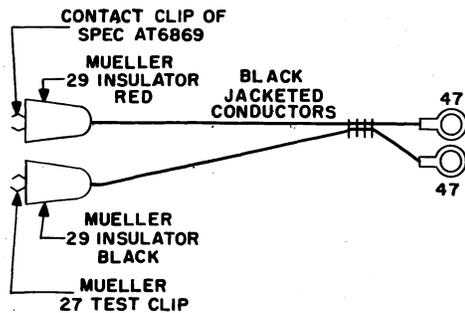Res. 0.065 ω /ft

The code of the cord includes one contact clip for C cable transfer clip per specification AT6869, one No. 27 Mueller test clip, two No. 29 Mueller insulators, one red and one black, and two No. 47 cord tips arranged for tip and ring connection to a No. 310 plug.

CORD, W2CU


10 feet long

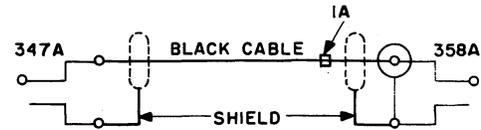Res. 0.016 ω /ft

The code of the cord includes one No. 347A plug, one No. 358A plug, and one No. 1A cushion.

CORD, W2DC


5 feet 6 inches long

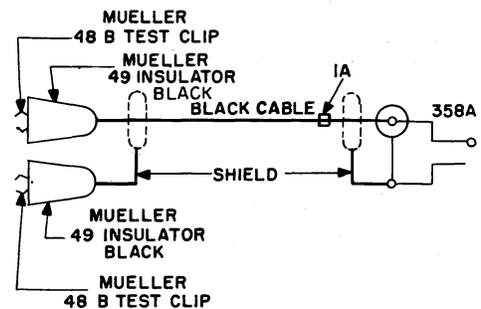Res. 0.016 ω /ft

The code of the cord includes two No. 48B Mueller test clips, two No. 49 Mueller insulators, black, one No. 358A plug, and one No. 1A cushion.

CORD, W2CN


6 feet long

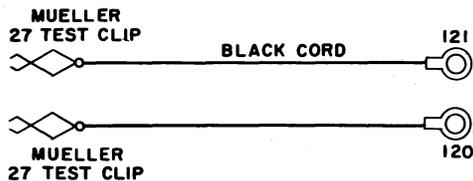

The code of the cord includes two No. 27 Mueller test clips, one No. 120 cord tip, and one No. 121 cord tip arranged for tip and ring connection to a No. 310 plug.

CORD, W2DD


15 feet long

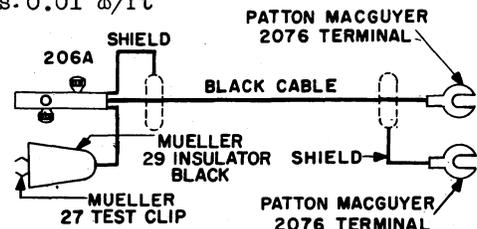Res. 0.01 ω /ft

The code of the cord includes one No. 206A connector, one No. 27 Mueller test clip, one No. 29 Mueller insulator, black, and two No. 2076 Patton MacGuyver Co. terminals (for No. 12 screw). The cord is primarily intended for use with a Megger in testing the insulation of a coaxial pair in type L carrier system.

CORD, W2CS


9 feet long

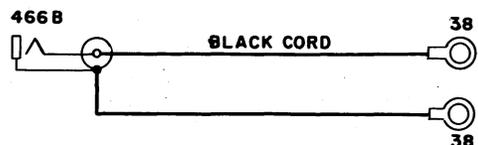Res. 0.065 ω /ft

The code of the cord includes one No. 466B jack and two No. 38 cord tips arranged for tip connection to a No. 347A plug and for tip connection to a No. 347B plug.

→ CORD, W2DE


4 feet long
Res. 0.006 ω /ft

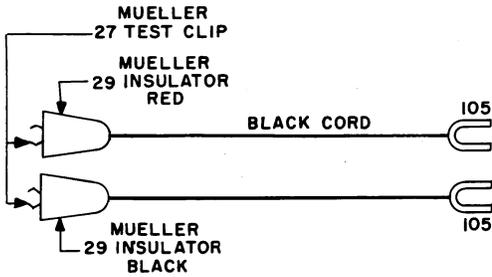

The code of the cord includes two No. 27 Mueller test clips, two No. 29 Mueller insulators, one black and one red, and two No. 105 cord tips.

→ CORD, W2DF


15 feet or 30 feet long
(Order Length As Required)
Res. 0.01 ω /ft

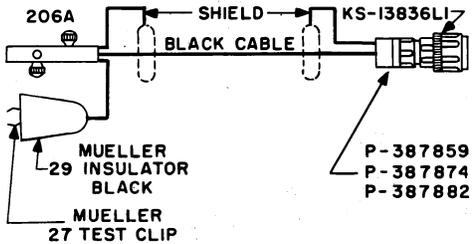

The code of the cord includes one No. 206A connector, one No. 27 Mueller test clip, one No. 29 Mueller insulator, black, one KS-13836,L1 connector, one P-387859 washer, one P-387874 bushing, and three P-387882 screws. The KS-13836,L1 connector is a single contact coaxial plug and clamp assembly. The cord is primarily intended for use with the No. 90A test set.

→ CORD, W2DG


30 feet long
Res. 0.01 ω /ft

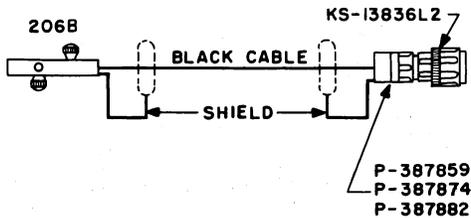

The code of the cord includes one No. 206B connector, one KS-13836,L2 connector, one P-387859 washer, one P-387874 bushing, and three P-387882 screws. The KS-13836,L2 connector is a single contact coaxial plug and clamp assembly. The cord is primarily intended for use with the No. 90A test set.

→ CORD, W2DH


15 feet long
Res. 0.01 ω /ft

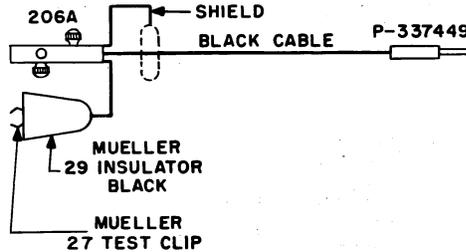

The code of the cord includes one No. 206A connector, one No. 27 Mueller test clip, one No. 29 Mueller insulator, black, and one P-337449 plug (black phone tip plug). The cord is primarily intended for use with the No. 90A test set.

→ CORD, W2DM


10 feet long

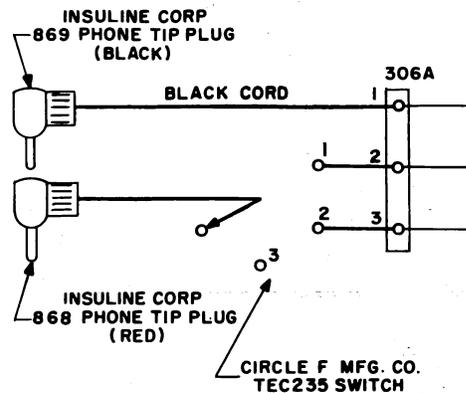

The code of the cord includes one No. 306A plug, two Insuline Corp. of America Grip-Rite molded phone tip plugs, one No. 868 and one No. 869, and one No. TEC 235 Circle F Mfr. Co. switch. The cord is primarily intended for use with the portable grid battery for types C and J carrier systems.

→ CORD, W2DS


4 feet long

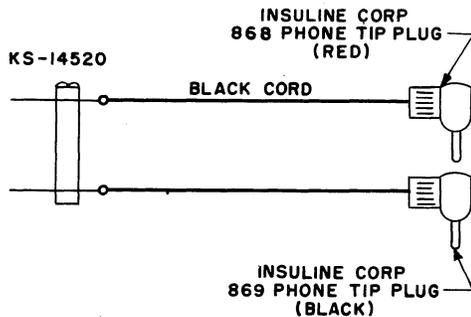

The code of the cord includes one KS-14520 plug and two Insuline Corp. of America Grip-Rite phone tip plugs, one No. 868 and one No. 869. The KS-14520 plug is arranged to work with the KS-14519 jack. The cord is primarily intended for use with 2400- or 2600-cycle signaling supply units and testing equipment units in toll systems.

→ CORD, W2DT


1 foot 3 inches long

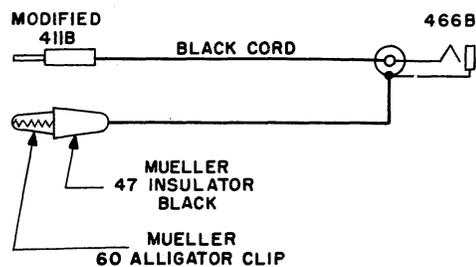Res. 0.01 ω /ft

The code of the cord includes one No. 411B modified test pick, one No. 466B jack, one No. 60 Mueller alligator clip, and one No. 47 Mueller insulator, black. The cord is primarily intended for use with the J68345A transmitter receiver test set used in the TD-2 radio system.

→ CORD, W2DW


8 feet long

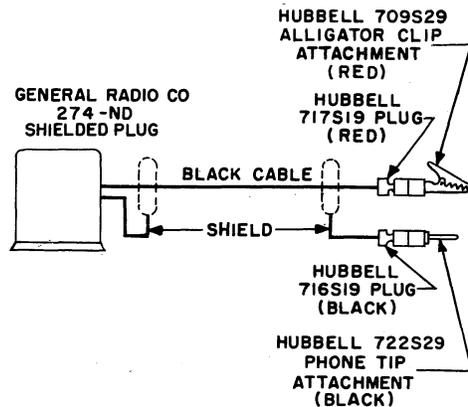Res. 0.016 ω /ft

The code of the cord includes one No. 274-ND General Radio Co. shielded plug, one No. 716S19 Hubbell interlock plug (black), one No. 717S19 Hubbell interlock plug (red), one No. 708S29 Hubbell interlock alligator clip attachment (black), one No. 709S29 Hubbell interlock alligator clip attachment (red), one No. 722S29 Hubbell interlock phone tip attachment (black) and one No. 723S29 Hubbell interlock phone tip attachment (red). The cord is primarily intended for use in type O carrier telephone system.

→ CORD, W2DY

4 feet long

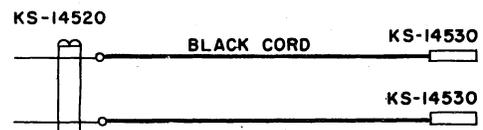
Res. 0.01 ω /ft

The code of the cord includes one KS-14520 plug and two KS-14530 connectors. The KS-14520 plug is arranged to work with the KS-14519 jack. The KS-14530 connector is arranged for fastening a lead. The cord is primarily intended for use in testing 2400- or 2600-cycle single frequency signal units.

→ CORD, W2EB

2 feet 10 inches long

Res. 0.013 ω /ft

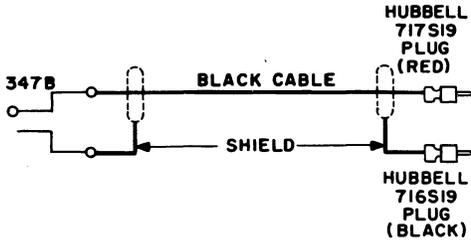

The code of the cord includes one No. 347B plug, one No. 717S19 Hubbell interlock plug (red), and one No. 716S19 Hubbell interlock plug (black). The cord forms a part of the J98705U, L1 and L2 servicing center test sets.

→ CORD, W2EC


"Mfr. Disc."
(Replaced by W2ED plus W2EE cords)

→ CORD, W2ED

(Together with the W2EE cord, replaces the W2EC cord)

4 inches long

Res. 0.01 ω /ft

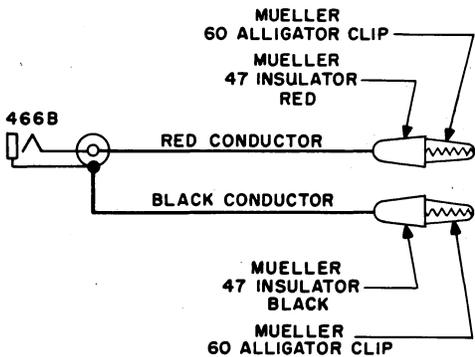


The code of the cord includes one No. 466B jack, two No. 60 Mueller alligator clips, and two No. 47 Mueller insulators, one black and one red. The cord is primarily intended for use with the P2BJ cord in testing J68828 and J68829 carrier terminal equipment for the L3 carrier telephone system.

→ CORD, W2EE

(Together with the W2ED cord, replaces the W2EC cord)

4 inches long


Res. 0.01 ω /ft

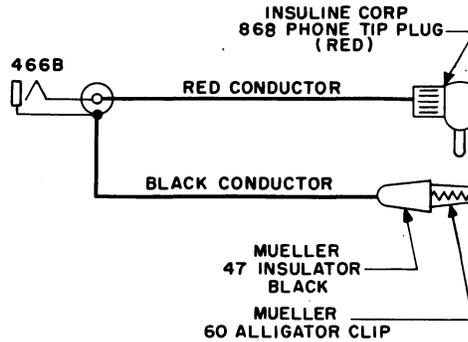

The code of the cord includes one No. 466B jack, one No. 868 Insuline Corp. of America Grip-Rite molded phone tip plug, one No. 60 Mueller alligator clip, and one No. 47 Mueller insulator, black. The cord is primarily intended for use with the P2BJ cord in testing J68828 and J68829 carrier terminal equipment for the L3 carrier telephone system.

→ CORD, W2EJ

18 feet long

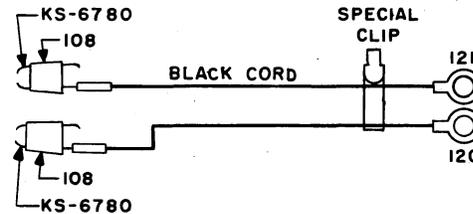

The code of the cord includes two KS-6780 connecting clips with two No. 108 cord tips (rubber insulators), one special cord support clip, one No. 120 cord tip and one No. 121 cord tip arranged for tip and ring connection to a No. 310 plug. The cord forms part of the No. 1A cord kit.

CORD, D-175112

"Mfr. Disc."