

HAND TELEPHONE SETS HANGING TYPE DESCRIPTION

1. GENERAL

1.01 This section describes the 211, 212, 213 and 214 types (hanging types) of hand telephone sets and also lists the combination of apparatus in these codes.

1.02 This section is reissued to convert it to letter size and to incorporate material from the addendum in its proper location. In the process of this conversion, marginal arrows have been omitted.

1.03 Use. For information on the use of the hand telephone sets described herein, see sections in Division C60 entitled "Station Sets by Class of Service."

1.04 Equivalent Apparatus: The hand telephone set assembly codes listed herein cover the latest type of apparatus. Where equivalent cords, mountings, hand sets, dials etc. are available they may be used in place of those listed.

1.05 Colored Finishes: The codes listed are for apparatus with a black finish. When other finishes in color are desired, the dash number (-3) in the code should be changed as specified in the section entitled "Colored Station Sets."

2. DESCRIPTION

2.01 Hand telephone sets of the types referred to herein are shown in the following figures:

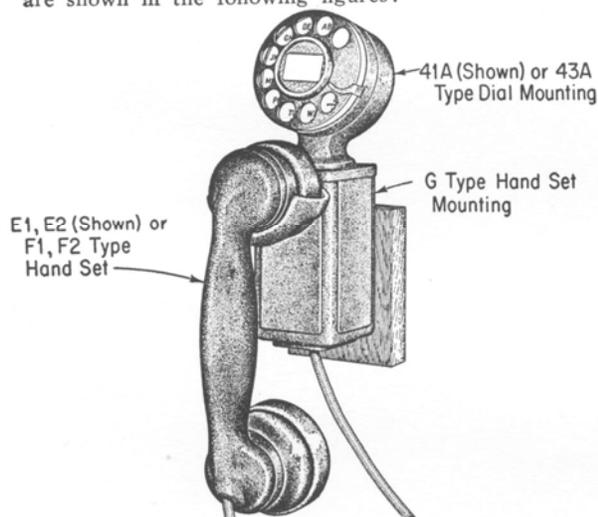


Fig. 1—Typical 211, 212, 213 and 214 Hand Telephone Sets

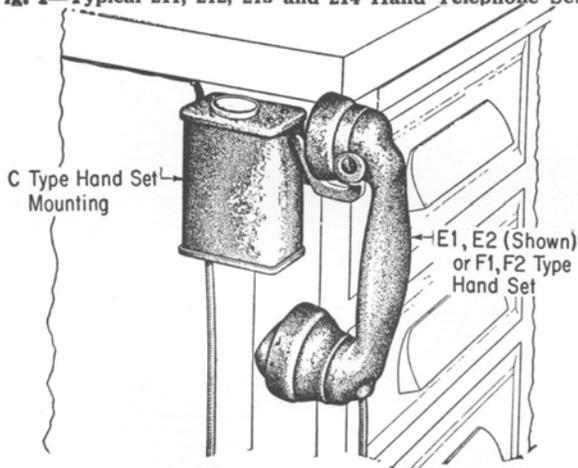


Fig. 2—Typical 201-Type Hand Telephone Set

3. APPARATUS

HAND TELEPHONE SET CODE	COMBINATION OF APPARATUS			
	Hand Set (Note 1)	Hand Set Mounting	Dial (Note 2)	Cords
201A-3	F1A-3	C1-3	Card Holder	D5S
**201B-3	F1A-3	C1-3	5HA-3	D5S
**201C-3	F1A-3	C1-3	5HB-3	D5S
**201D-3	F1A-3	C1-3	5HE-3	D5S
211A-3	F1A-3	G1-3	Card Holder	—
*211B-3	F1A-3	G1-3	6A	D3AH, (1) MIE-5-1/2"
*211C-3	F1A-3	G1-3	6A	D3AH, (1) MIE-5-1/2"
*211D-3	F1A-3	G1-3	6A	D3AH, (1) MIE-5-1/2"
211E-3	F1A-3	G1-3	Card Holder	—
*211F-3	F1A-3	G1-3	6A	(3) MIE-5-1/2"
*211G-3	F1A-3	G1-3	6A	(3) MIE-5-1/2"
*211H-3	F1A-3	G1-3	6A	(3) MIE-5-1/2"
*212A-3	F1A-3	G2-3	6A	D3AH, (2) MIE-5-1/2"
*212B-3	F1A-3	G2-3	6A	D3AH, (2) MIE-5-1/2"
*212C-3	F1A-3	G2-3	6A	D3AH, (2) MIE-5-1/2"
*213A-3	F1A-3	G3-3	6A	D3AH, (1) MIE-5-1/2"
*213B-3	F1A-3	G3-3	6A	D3AH, (1) MIE-5-1/2"
*213C-3	F1A-3	G3-3	6A	D3AH, (1) MIE-5-1/2"
213E-3	F1A-3	G3-3	Card Holder	—
214A-3	F2B-3	G2-3	Card Holder	—
*214B-3	F2B-3	G2-3	6A	D3AH, (1) MIE-5-1/2"
*214C-3	F2B-3	G2-3	6A	D3AH, (1) MIE-5-1/2"
*214D-3	F2B-3	G2-3	6A	D3AH, (1) MIE-5-1/2"

** Equipped with 39A-3 Dial Mounting.

* Equipped with 43A-3 Dial Mounting.

Note 1: E1E-3 and E2C-3 Hand Set may be used in place of the F1A-3 and F2B-3 Types, respectively.

Note 2: Sets in colors other than black are equipped with 4J or 5J-type dials. Although 4 and 5-type dials may be used on all sets the 6-type dial is not readily adaptable for use on the 201-type set. The 4 and 5-type dials are recommended for use on these sets.

Note 3: Telephone sets may be equipped with retractile handset cords. The code number of sets so equipped is the same as the code number of sets equipped with regular cords, except that the suffix R has been added to the code number. For example: a 201A-3 handset equipped with retractile handset cord would become a 201AR-3 handset. Sets ordered with suffix R will be equipped with retractile handset cords when received.

3.01 A 61M filter is used with the 211, 212, 213 and 214-type sets and a 61G filter with the 201-type set for radio frequency suppression.