

HAND SETS

E2A-3, E2B-3 AND E2C-3

DESCRIPTION AND USE

1. GENERAL

1.01 This section gives general information pertaining to the E2A-3, E2B-3 and E2C-3 hand sets, such as their use, description, piece parts, and the combination of apparatus that is included in the code number.

2. DESCRIPTION

2.01 The E2A-3, E2B-3 and E2C-3 types of hand sets use four conductor cords and are shown in Fig. 1.

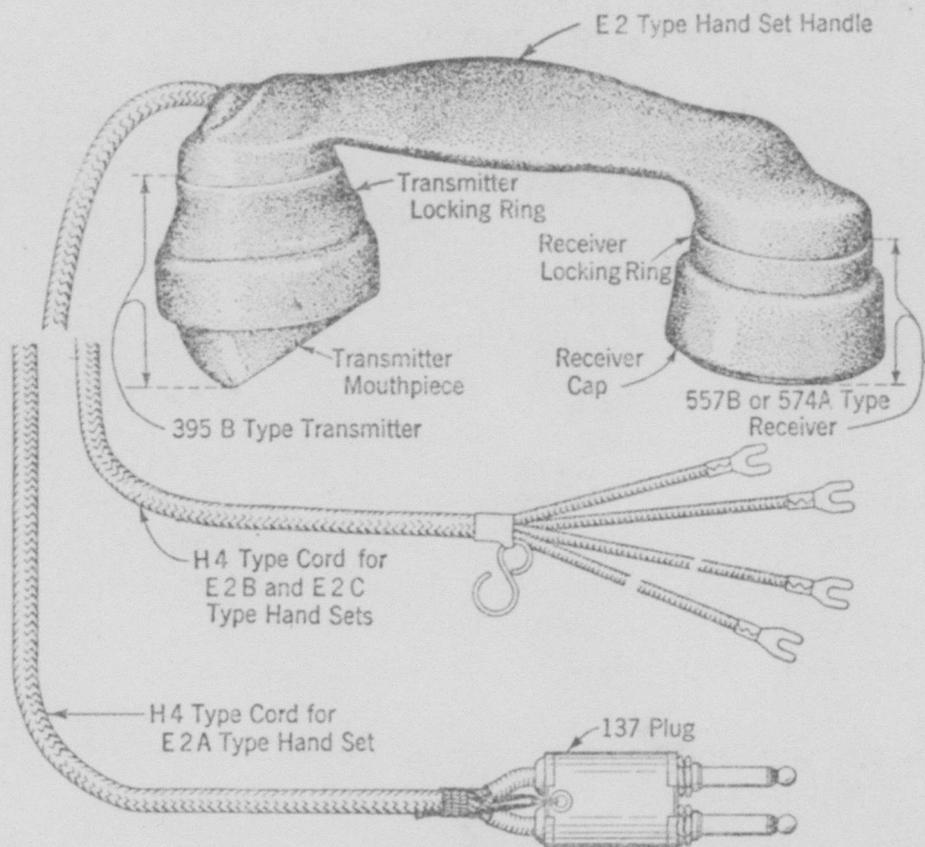


Fig. 1.

3. USE

3.01 The **E2A-3** type hand set has a cord terminated in a plug and is for use in central offices, on P.B.X.'s and with order turrets.

3.02 The **E2B-3** type hand set has a special receiver and is for use with a hand set mounting for local battery talking, common battery signaling anti-sidetone connections.

3.03 The **E2C-3** type hand set is for use with a hand set mounting in connection with apparatus for subscribers with impaired hearing.

4. APPARATUS

4.01 The E2A-3, E2B-3 and E2C-3 type hand sets consist of the following apparatus and piece parts:

(a) One E2-3 Hand Set Handle

(b) One Receiver as follows:

E2A-3	557B-3 Receiver
E2B-3	574A-3 Receiver
E2C-3	557B-3 Receiver

(c) Receiver Parts

Receiver Cap (Black only)	P-235058 Cap
Receiver Diaphragm	P-98387 Receiver Diaphragm
Receiver Locking Ring (Black only)	P-208591 Ring

(d) One 395B-3 Transmitter

Transmitter Locking Ring (Black only)	P-213225 Outer Case
Transmitter Mouthpiece (Black only)	P-213223 Mouthpiece
Transmitter Unit	395B-3 Transmitter Unit

(e) One cord as follows:

E2A-3	H4C Cord
E2B-3	H4D-9 Cord
E2C-3	H4D-9 Cord

(f) The E2A-3 hand set also has a 137 plug included as part of the assembly code.