
SLC[®] Series 5 Carrier System

AUA62D/AUA62F DS1 LIU Line Powering — 5SLI525 (AUA62F)

⇒ NOTE:

The AUA62F line interface unit (LIU) is needed for T1 line fault locating procedures.

This data sheet describes the AUA62D S1:2, AUA62D S3:4, and AUA62F DS1 LIUs (COMCODE 105703953, 106314305, and 107086985, respectively) and is intended for the end-user of the unit. The AUA62D/AUA62F LIU is used in the SLC[®] Series 5 Carrier System central office terminal (COT) to interface the system directly to a T1 line. Typically, the AUA62D/AUA62F LIU is used in the COT to power the T1 line repeater connecting the COT to the remote terminal (RT). However, the AUA62D/AUA62F LIU can be used in the RT for T1 line back-powering applications. The AUA62F replaces all AUA62, AUA62B, AUA62C, and AUA62D LIUs and is required for the Mode 2 (concentration) capability of Feature Package B (FPB) — the LIU provides the data link for the C digroup.

This data sheet is reissued to add information for the AUA62F LIU.

Figure 1 is a functional block diagram of the unit, and Figure 2 shows the faceplate, the board outline, and the positioning of the switches and indicators of the AUA62F LIU.

The received signal is sent using the RATE switch to either the transmit-receive unit (TRU) for 64 kb/s μ -law pulse code modulation (PCM) operation, or the low bit rate voice (LBRV) transcoder unit (TCU) for 32 kb/s operation.

In the transmit direction, the LIU converts the internal 4.096 Mb/s PCM or adaptive differential pulse code modulation (ADPCM) (LBRV) format to a 1.544 Mb/s DS1 rate. It also inserts the extended super frame (ESF) or Fs framing sequence, the signaling bits, and the X.25 or SLC 96 Carrier System [for FPB (Mode 96) RT applications] data link. When operating in ESF mode, the LIU sends a yellow alarm to the far-end terminal in response to near-end failures. The AUA62D/AUA62F LIU also has switch-selectable 0 dB, 7.5 dB, 15.0 dB, and 22.5 dB pads to meet route junction level coordination and end-section design requirements. The LIU powers the outgoing T1 line with a 60 mA current feed that is voltage limited to –130 V during normal operation.

In the receive direction, the AUA62D/AUA62F uses an automatic line build-out (ALBO) and switch-selectable 0 dB and 7.5 dB pads to provide compatibility with short end sections and allow from 0 dB to 33.5 dB of loss in the end section. The LIU converts the incoming DS1 signal to the internal 4.096 Mb/s format. The AUA62D/AUA62F also extracts the received ABCD (in ESF) and ABAB (in D4/SLC 96 Carrier) signaling bits. It also monitors the received signal for excessive CRC-6 errors (ESF) or bipolar violations (Fs), loss of frame, and loss of signal. Failures are reported to the bank controller. Failures also cause the E-bit to be set (this freezes the signaling state in the channel units and the LIU) and, after 2.5 seconds, cause the G-bit to be set (this initiates trunk processing). When used in an RT, the AUA62D/AUA62F LIU can loop DS1 input back to the DS1 output under command of the bank controller. This line loopback is intended for use while single-ended T1-line fault locating is being done from the CO end of the system.

The LIU does bank loopbacks (if ordered by the bank controller) to sectionalize failures so that the bank controller can provide detailed information about failures to the craft personnel.

The switches located on the board of the AUA62D/AUA62F LIU provide the following functions.

TRANSMIT PAD option — These four switches (TRANS- 1, 2, 3, 4) select the amount of loss inserted in the transmit path to meet route-junction and end section requirements (see Table 1).

Table 1. Transmit Pad Setting vs. Inserted Loss

TRANS-				Inserted Loss (dB)
1	2	3	4	
OFF	OFF	OFF	ON	22.5
OFF	OFF	ON	OFF	15.0
OFF	ON	OFF	OFF	7.5
ON	OFF	OFF	OFF	0.0

RECEIVE PAD option — These two switches (RCV- 1, 2) insert 0 dB or 7.5 dB of loss in the receive path as needed to meet route-junction and end section design requirements (see Table 2).

Table 2. Receive Pad Setting vs. Inserted Loss (Note)

RCV-		Inserted Loss (dB)
<u>1</u>	<u>2</u>	
ON	OFF	0.0
OFF	ON	7.5

Note: ON — press toward the number.
OFF — press away from the number.

B8ZS/ZCS option — This switch (B/Z) selects between per-channel zero code suppression (position Z) as used in the SLC 96 Carrier System and the bipolar with 8 zero substitution (position B) line code. Set this switch using applicable office records.

VF CHANNEL RATE option — This switch (RATE- 64/32) allows the selection of 64 kb/s (position 64) or 32 kb/s LBRV (position 32). The standard rate is 64 kb/s.


The LED indicators and jacks located on the faceplate of the AUA62D/AUA62F LIU provide the following functions.

CLF (Yellow LED) — When lighted, this LED indicates that a carrier line failure has been identified for the digital facility connecting the COT and RT.

FAIL (Red LED) — When lighted, this LED indicates that a failure has been identified on this LIU.


+V, -V, +I, -I jacks — Measure for the following values using these jacks.

- transmit-side line current from +V to -I
- receive-side line current from +I to -V
- line voltage from +V to -V.

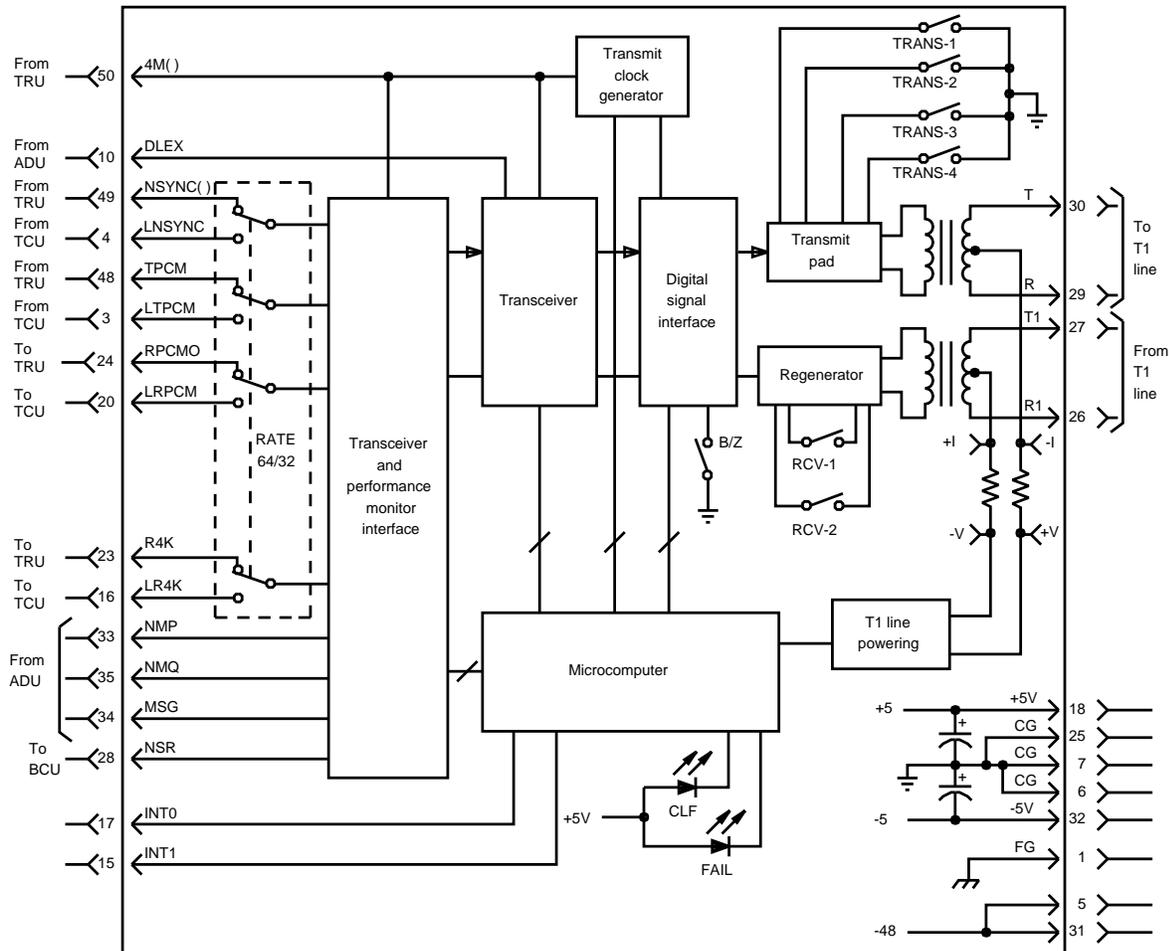

tpa 783931/01

Figure 1. AUA62D/AUA62F Block Diagram

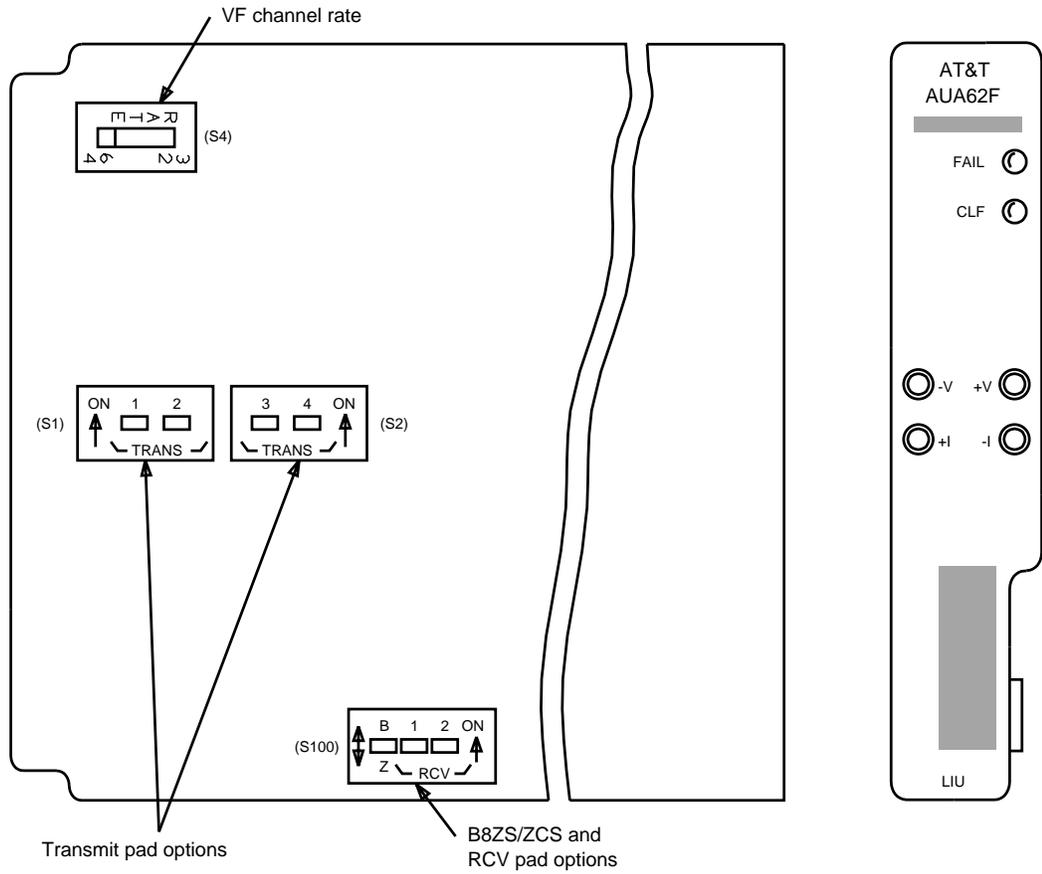

tpa 783932/01

Figure 2. AUA62F Faceplate and Component Layout

Follow local procedures for obtaining technical assistance. AT&T also provides in-hours or emergency out-of-hours help for the *SLC* Series 5 Carrier System. Call the AT&T Regional Technical Assistance Center at **1-800-225-RTAC**.

Additional copies of this document (AT&T 363-005-151) are available from the Customer Information Center — call 1-800-432-6600.

Send comments about this document to:

AT&T Network Systems Customer Education and Training
Documentation Services
2400 Reynolda Road
Winston-Salem, NC 27106-4606

Copyright © 1994 AT&T. All Rights Reserved.

This material is protected by the copyright laws of the United States and other countries. It may not be reproduced, distributed, or altered in any fashion by any entity including other AT&T business units or divisions without the expressed written consent of the Customer Education and Training Organization.

For permission to reproduce or distribute, please contact:

DLC Product Development Manager 908-949-3702