

**BELL SYSTEM PRACTICES**  
Station Installation and Maintenance

**SECTION C35.301**  
Issue 1, 1-2-36  
AT&T Co. Standard

## **AUXILIARY RECEIVERS AND HOLDERS**

### **DESCRIPTION AND USE**

#### **1. GENERAL**

1.01 This section covers the 146A auxiliary receivers and the holders that may be employed to hold these receivers when they are used to supplement the regular receiver at telephone stations installed at exceptionally noisy locations.

1.02 Auxiliary receivers and receiver holders should not be installed without a service order or other proper authorization.

1.03 Key Equipment (and wiring plan) instructions should be consulted for information covering arrangements whereby the connections for head sets or other receivers are controlled by a key.

1.04 Auxiliary receivers should be bridged on the same terminals in desk stands and hand telephone sets as are employed for the regular receiver connections. Where this would result in more than three cord tips being connected to a single screw terminal, one of the cords which would normally be connected to such terminal should if possible be transferred to another terminal which is directly connected to it (as by a strap or a MIE cord).

#### **2. 1A RECEIVER HOLDER**

2.01 The 1A receiver holder should be installed on desk stands by using the same bolt and screw employed for fastening the transmitter to the desk stand as shown in Fig. 1.

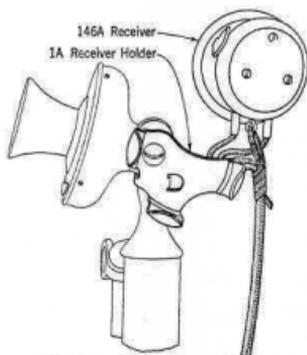


Fig. 1.—1A Receiver Holder

3. 8A RECEIVER HOLDER

- 3.01 The 8A receiver holder should be installed on "D" type hand set mountings as shown in Fig. 2.

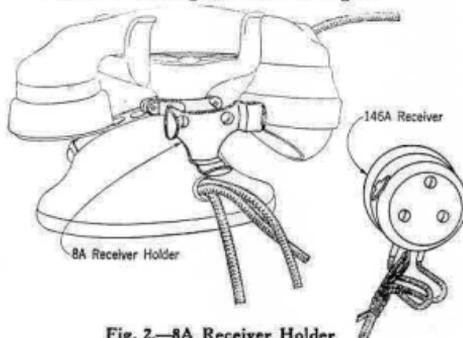


Fig. 2.—8A Receiver Holder

- 3.02 Receiver holders are not available for use on A, B, or E type hand set mountings. The A and B types should be replaced by the D type where a receiver holder is required.