

**BELL SYSTEM PRACTICES**  
**Station Installation and Maintenance**

**SECTION C52.205**  
**Issue 2, 1-25-36**  
**AT&T Co. Standard**

# **TELEPHONE BOOTHS**

## **1, 2, 5, 6 AND 7 TYPES**

### **DESCRIPTION AND SUPPLIES**

#### **1. GENERAL**

1.01 This section lists the supplies (apparatus, material, and piece parts) which are used in the installation and maintenance of 1, 2, 5, 6 and 7 type (folding door) telephone booths. Furthermore, this section gives a brief description of these booths. The section is reissued to include the 7 type booths and to cover changes in supply items, because of improvements in booth design.

1.02 The 5 and 6 type booths supersede the 1 and 2 type booths for all general purposes. However, because of the difference in height, 5 and 6 type booths should not be installed in the same bank with 1 type booths.

1.03 The 7 type booths are intended for use in hotels, railroad terminals, etc., where a somewhat larger and more roomy booth is desired. These booths should not be installed in the same bank with 1 type booths.

1.04 The 2 type booths are for use in single installations, and therefore should not be installed in banks (multiple installations).

1.05 Whenever booths with lights are ordered one of the following arrangements must be specified for each booth for connecting booth lighting circuit to source of electric current supply.

- (a) Cable P-370287 (Armored cable for use with two-wire plug receptacle).
- (b) Cable P-370288 (Flexible cord assembly for use with three-wire plug receptacle).
- (c) Cable P-370283 (Interconnecting cable between booths, specify right or left).



(d)\*Without lead-in or interconnecting cable.

\*This assembly is intended for use with plug fuse cutout or booth cutout switch but is not listed by the Underwriters' Laboratories and will require inspection when installed. Plug fuse cutout or booth cutout switch and associated cable listed in Part 3 should be ordered in accordance with local operating company practice.

## 2. DESCRIPTION

### (A) Illustration and Code Numbers of 5 and 6 Type Telephone Booths

2.01 The 6 type booth is shown in Fig. 1. Structurally, 5 and 6 type booths are similar. They differ, however, in that the 6 type booths are equipped with a seat, whereas the 5 type booths are not.

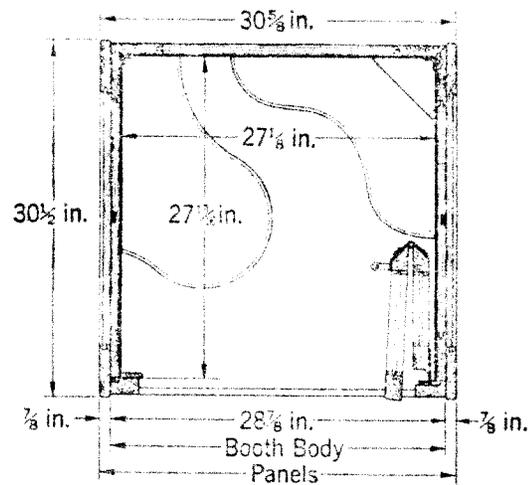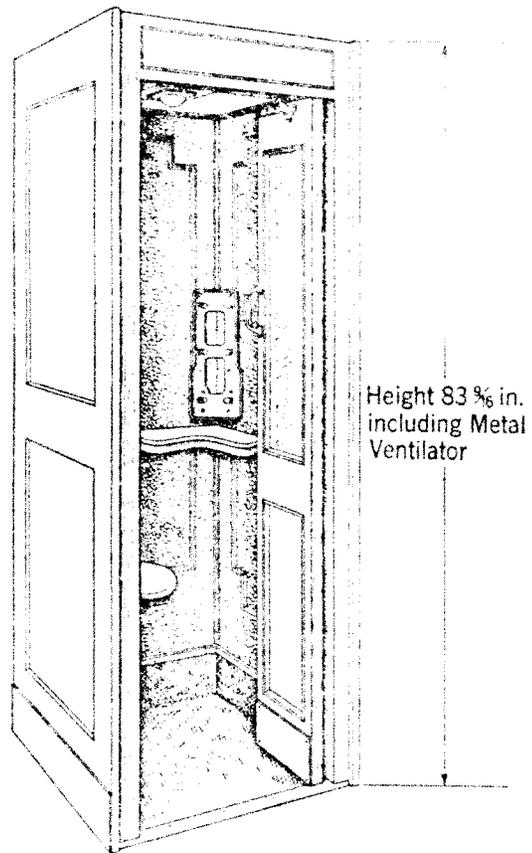

(For multiple installations, separators are used in accordance with Section C52.206)

**Fig. 1**

Booth Code No. (See Par. 2.02 to 2.05)		Finish	Material of		Panel (See Par. 2.02 and 2.03)	Separator (See Par. 2.02)
			Front	Back		
5A	6A	Mahog. (Med.)	Mahog.	Mahog.	51A	1A
5B	6B	Mahog. (Med.)	Mahog.	Softwd.	51A	1A
5C	6C	Oak	Oak	Oak	51C	1C
5D	6D	Oak	Oak	Softwd.	51C	1C
5E	6E	Mahog. (Dark)	Mahog.	Mahog.	51E	1E
5F	6F	Mahog. (Dark)	Mahog.	Softwd.	51E	1E
5G	6G	Wal.	Mahog.	Mahog.	51G	1G
5H	6H	Wal.	Mahog.	Softwd.	51G	1G
5L	6L	Unfin.	Mahog.	Mahog.	51L	1L
5M	6M	Unfin.	Mahog.	Softwd.	51L	1L
5N	6N	Unfin.	Oak	Oak	51N	1N
5P	6P	Unfin.	Oak	Softwd.	51N	1N
5R	6R	Unfin.	Wal.	Wal.	51R	1R
5S	6S	Unfin.	Wal.	Softwd.	51R	1R

2.02 The 51 type panels in the foregoing table are end panels. These panels and the separators are not included under booth code number, and therefore must be ordered separately. Where booth is to be equipped with a light, a Mazda lamp must be ordered separately and where booth is to be equipped with directory light, a 2B or 2C light fixture and a Mazda lamp must also be ordered separately. For the 2B light fixture, cable assembly P-239840 for connecting this fixture to the booth light fixture must be ordered separately. If a key for locking the lamp in the light fixture is required, a 544A key shall be ordered separately.

**Note:** Provide a 25-watt lamp unless higher wattage is specified.

2.03 The back panels listed below are available as a substitute for the backs which are regularly part of 5 or 6 type booths. These panels have small exit doors or glass panels, and are for use where it is desired to minimize the obstruction of light, or to gain access to show windows, plumbing fixtures, etc., which otherwise would be obstructed. Moreover, these panels are not included under booth code number, and therefore must be ordered separately. Installation of these back panels on the premises of the public telephone agent is usually

impracticable and, where required, booths should, in general, be ordered equipped with the panels.

- (a) 52A, 52C, 52E, 52G, 52L, 52N and 52R panels.\* Back panels having small door without glass.
- (b) 53A, 53C, 53E, 53G, 53L, 53N, and 53R panels.\* Back panels having small door with glass in upper door panel.
- (c) 54A, 54C, 54E, 54G, 54L, 54N and 54R panels. Back panels having glass panel, and are for use on either 5 or 6 type booths. The code letter for each panel indicates the same woodwork and finish that is standard on the 5 or 6 type booth having the corresponding code letter. Panels are furnished with corner moldings and attaching screws, and require a 15A shelf which is furnished with booth.

\*Panels for 5 type booths only. Panels are furnished with corner moldings, attaching screws, door lock and key, and the 14T shelf is furnished with booth. The code letter for each panel indicates the same woodwork and finish that is standard in the 5 type booth having the corresponding code letter.

2.04 The 5 type booth is furnished with a shelf (coded 15A), whereas the 6 type booth is furnished with the 15A shelf and a seat (coded 101T). If a seat is required for a 5 type booth in service, the 101T seat (includes bracket) shall be provided.

2.05 Both the 5 and 6 type booths are also furnished with a backboard for the coin collector, a 12 type connecting block and the wiring for the coin collector and the subscriber set and unless otherwise specified in order, a 1A light fixture, 215A switch or a 204A switch with 15A rod. When the order specifies booth without light, the switch and rod are omitted and a 74A apparatus blank is furnished.

2.06 Where the use of booths having a better interior appearance than the standard booths is desirable 5 and 6 type booths may be ordered equipped with "smooth lining." This is a smooth, flat metal lining with gold brown mottled finish applied over the regular booth lining. Booths with the smooth lining added shall be installed only when specified on the service order or upon other proper authorization.

#### **(B) Illustration and Code Numbers of 7 Type Booths**

2.07 The 7 type booths are greater in depth and width than the 5 and 6 type booths and are equipped with a swivel chair and ventilating fan. The 7 type booth is shown in Fig. 2.

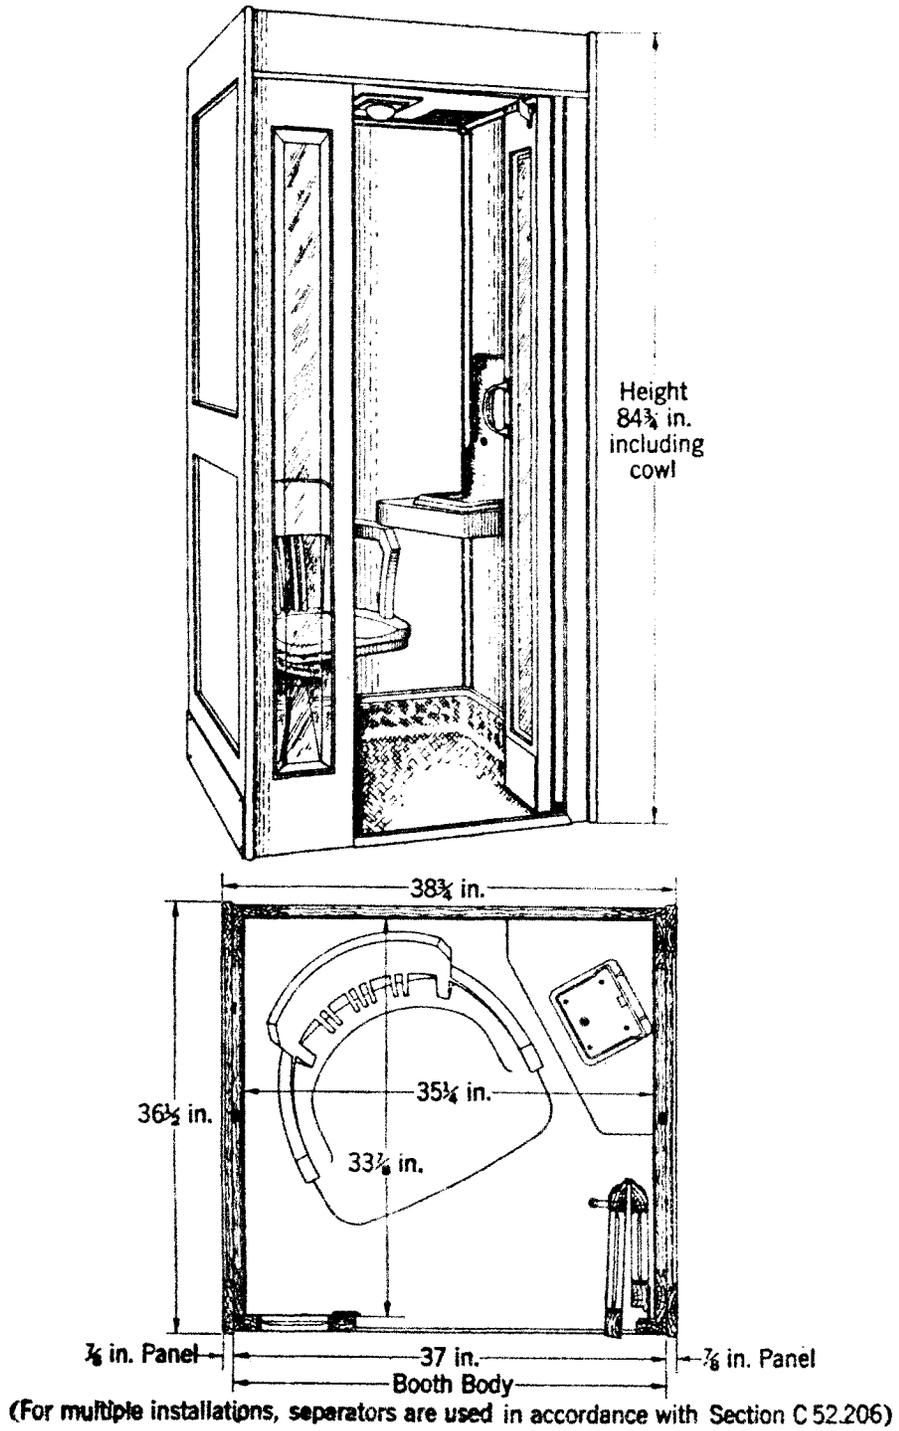


Fig. 2

Booth Code No. (See Par. 2.08 & 2.09)	*Finish		Panel (See Par. 2.08)	Separator (See Par. 2.08)
	Front	Back		
7A	Mahog. (Med.)	Mahog. (Med.)	55A	2A
7B	Mahog. (Med.)	Softwd.	55A	2A
7E	Mahog. (Dark)	Mahog. (Dark)	55E	2E
7F	Mahog. (Dark)	Softwd.	55E	2E
7G	Wal.	Wal.	55G	2G
7H	Wal.	Softwd.	55G	2G
7L	Unfin.	Hardwd.	55L	2L
7M	Unfin.	Softwd.	55L	2L

\* 7 type booths are mahogany wood booths with finish as indicated above.

2.08 The 55 type panels listed in the table are end panels.

These panels and the separators are not included under the booth code number and must be ordered separately. A Mazda lamp for the light fixture must be ordered separately. Where a booth is to be equipped with directory light a 2D light fixture and a Mazda lamp must also be ordered separately. If a key for locking the lamp in the light fixture is required, a 544A key shall be ordered separately.




**Note:** Provide a 25-watt lamp unless higher wattage is specified.

2.09 Booth code numbers include swivel chair, fan and shelf.

Moreover booth codes include backboard for coin collector and 12 type connecting block, fan switch, door switch, 1B light fixture, etc., and the wiring for coin collector and subscriber set.


### (C) Illustration and Code Numbers of 1 and 2 Type Telephone Booths

2.10 When assembled, the 1 type booths consist essentially of two main parts, i.e., the booth body and panels or separators. The 2 type booths, however, are built as single units having either solid finished wood sides or finished wood sides with glass panels. Both types of booths have the 4-inch raised floor. The 1 and 2 type booths are shown in Figs. 3 and 4 respectively.

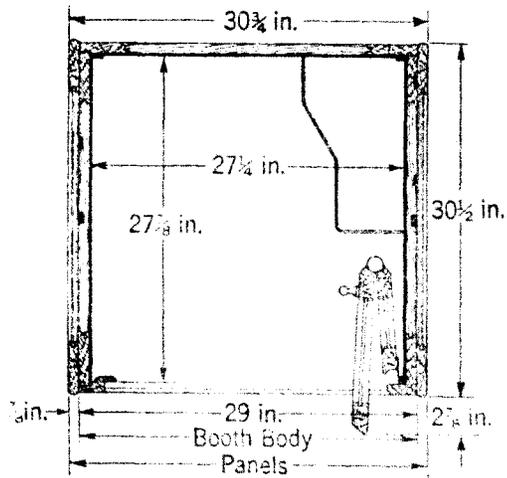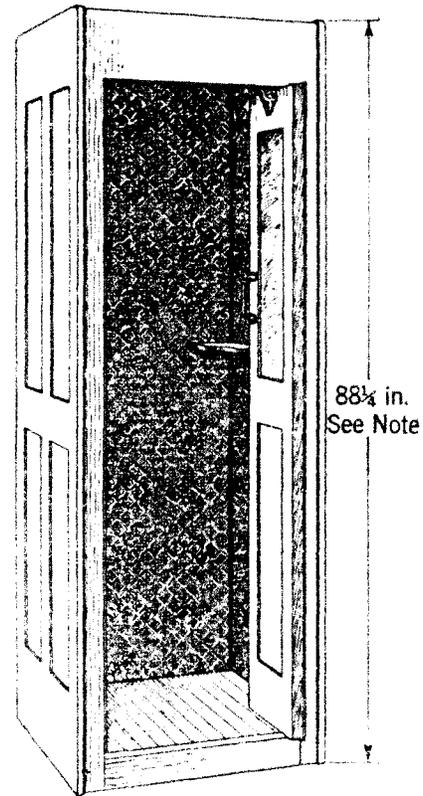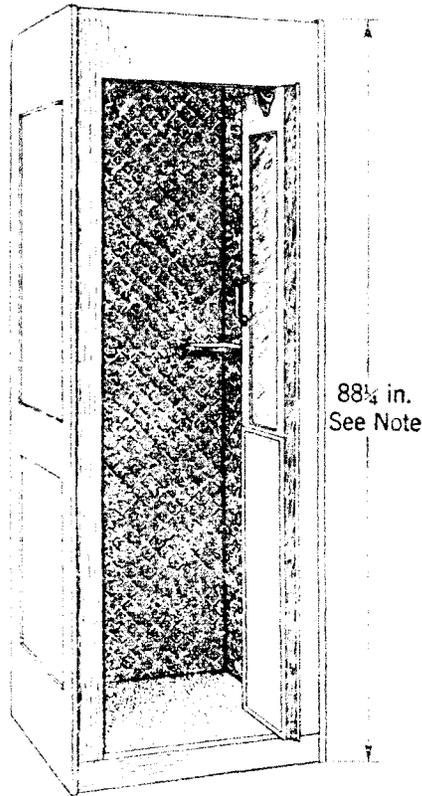

(For multiple installations, separators are used in accordance with Section C52.206)

**Fig. 3—1 Type Booth**

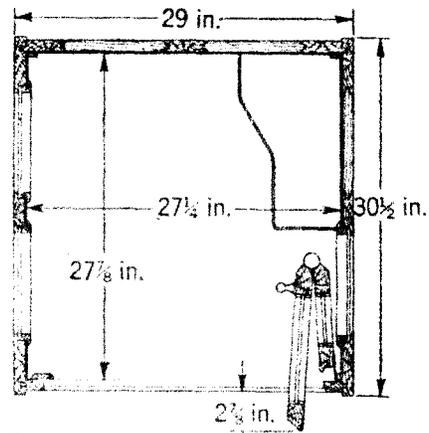

Note:  
When booth has roof equipped with metal ventilator, add 1/8 in. to overall height dimension.

**Fig. 4—2 Type Booth**

### 1 Type Telephone Booths

Booth Code No.	Finish	Material of	
		Front	Back
1A	Mahog. (Med.)	Mahog.	Mahog.
1B	Mahog. (Med.)	Mahog.	Softwd.
1C	Oak	Oak	Oak
1D	Oak	Oak	Softwd.
1E	Mahog. (Dark)	Mahog.	Mahog.
1F	Mahog. (Dark)	Mahog.	Softwd.
1G	Wal.	Mahog.	Mahog.
1H	Wal.	Mahog.	Softwd.
1J	Wal.	Wal.	Wal.
1K	Wal.	Wal.	Softwd.
1L	Unfin.	Mahog.	Mahog.
1M	Unfin.	Mahog.	Softwd.
1N	Unfin.	Oak	Oak
1P	Unfin.	Oak	Softwd.
1R	Unfin.	Wal.	Wal.
1S	Unfin.	Wal.	Softwd.

### 2 Type Telephone Booths

Booth Code No.	Finish	Description
2A	Oak	Two glass panels in left side, one glass panel in right side.
2B	Mahog. (Dark)	Two glass panels in left side, one glass panel in right side.
2C	Mahog. (Med.)	Two glass panels in left side, one glass panel in right side.
2G	Oak	Solid wood sides.
2H	Mahog. (Dark)	Solid wood sides.
2J	Mahog. (Med.)	Solid wood sides.

2.11 Panels and separators for the 1 type booths have not been coded. For the method of ordering such parts, see listings under Part 3. Booth code does not include seat. If a seat is required, provide a 101T seat.

2.12 For either type booth, provide the 15A shelf when shelf replacements are required.

2.13 Booth lighting equipment will not be furnished on 1 and 2 type booths unless specified on the order. The 2B or 2C light fixture should not be installed on 2 type booths.

### 3. SUPPLIES

**Apparatus  
Blanks:**

**Apparatus Blank, D-92965.** For use in plugging hole left exposed by removal of 140A switch in 1 and 2 type booths.

**42B Apparatus Blank.** For use in plugging wiring holes.

**74A Apparatus Blank.** For use in 5 and 6 type booths when not equipped with 1A light fixture. Also for use in 1 and 2 type booths provided with 7-1/4" x 7-1/4" opening in ceiling.

**Backboards:**

**139A-13 Backboard.** For use in mounting coin collector on shelf in 7 type booths. Furnished with five 10-32 x 3/4 inch machine screws for mounting the collector. Oxidized bronze finish.

**153A-3 Backboard.** For use in mounting coin collector in the corner of booths. Provided with eight 1 inch x 1/4 inch-20 F. H. Bright Mach. Screws for mounting the coin collector. Black finish.

**153-A13 Backboard.** Same as 153A-3 except that the finish is oxidized bronze.

**Base Plates:**

**Base Plate, D-92958.** For threshold of 1 type booths.

**Base Plate, D-92959.** For threshold of 2 type booths.

**Base Plate, D-92960.** For inside of 1 and 2 type booths, back and sides.

**Base Plate, D-92961.** For large door section of 1 type booths.

- Base Plate, D-92962.** For small door section of 1 type booths.
- Base Plate, D-92963.** For large door section of 2 type booths.
- Base Plate, D-92964.** For small door section of 2 type booths.
- Base Plate, P-370251.** For end panels of 1, 2, 5, and 6 type booths.
- Base Plate, P-370208.** For hardwood backs of 1, 2, 5, and 6 type booths.
- Bolt:** **3/16 inch-24 x 2 inch Step Bolt.** For mounting 153 type backboard.
- Brad:** **5/8 inch No. 18 Wire Brad.** For use in fastening linoleum in 1 type booths.
- Bushings:** **No. 1 Anti-Short Bushing.** (National Electric Products Corp. or approved equivalent.) Thin fibre bushing for use at end of armored cable between cable and armor.
- Bushing, P-214189.** Part of 215A or 215B switch.
- Cables:** **Cable, P-239840.** 33-inch booth cable, for use in connecting 2B light fixture to 1A light fixture. Consists of two-conductor No. 14 Ovalflex Flat Armored Bushed Electric Cable, with spade terminals at one end and 5 inch free conductor ends at the other end. Assembled with Anti-Short Bushings, one modified Ovalflex Angle Connector and one Ovalflex Box Connector.
- Cable, P-370281.** 10-inch booth cable for use between surface cabinet or cutout switch and 1A light fixture. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable with 5-inch free conductor ends, assembled with Anti-Short Bushings and 3/8-inch Box Connectors.
- Cable, P-370283.** 28-inch booth cable for use between 1A light fixtures of adjacent booths and also between 204A switch and old type lamp receptacle of 1 type booths. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable with spade terminal ends assembled with Anti-Short Bushings and 3/8-inch Box Connectors.

**Cable, P-370286.** 16-inch booth cable for use between 204A switch and 1A light fixture. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable with spade terminal ends, assembled with Anti-Short Bushings and two 3/8-inch Box Connectors.

**Cable, P-370287.** 48-inch booth cable, for use between lamp receptacle of 1 type light fixture and plug receptacle of electric lighting circuit. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable assembled with Anti-Short Bushings, one 3/8-inch Box Connector, one RI-C H & H Attachment Plug with 6-inch ground strap attached to the plug. Fire retarding braid on the conductors with spade terminals at one end and connected to the plug at the other end. Also one No. 7736 H & H Locking Ring and two 3/4-inch x 6-32 R.H. Electro Galv. Machine Screws in an envelope attached to plug.

**Cable, P-370288.** 48-inch booth cable. For use between lamp receptacle of 1 type light fixture and plug receptacle of electric lighting circuit. Consists of Three-Conductor No. 14 Type S Tirex Portable Cord, assembled with one No. 7055-G Hubbell Plug Cap and one No. 7327 Portable Cord Connector, or approved equivalents. Conductors equipped with spade terminals at one end and attached to plug cap at the other end.

**Cable, P-370289.** 16-inch booth cable for use between 1 type light fixture and 171B relay. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable with spade terminal ends, assembled with Anti-Short Bushings and two 3/8-inch Box Connectors.

**Cable, P-370300.** 36-inch booth cable for use between 1B light fixtures of adjacent 7 type booths. Consists of Two-Conductor No. 14 Armored Bushed Electric Cable with spade terminal ends, assembled with Anti-Short Bushings and 3/8-inch Box Connectors.

**Card Frame:**

**Card Frame, KS-6486.** Oxidized bronze finish frame for use in holding printed matter in booths. Includes glass.

**Ceiling  
Assemblies:**

**Ceiling, D-92966.** For use in 1, 5 and 6 type booths where it is desired to provide booth with electric light. Consists of ceiling on which is mounted a 1A light fixture, 215A switch or 204A switch and booth cable P-370286, 12E connecting block and either cable P-370283 or cable P-370287 or P-370288, as specified.

**Ceiling, D-92967.** For use in 2 type booths where it is desired to provide booth with electric light. Consists of ceiling on which is mounted a 1A light fixture, 215A switch or 204A switch and booth cable P-370286, 12E connecting block and either cable P-370287 or P-370288, as specified.

**Cloths:**

**Scrub Cloth.** Recovered white or gray, fleece lined, heavy-knit cloth. For use in washing finished wood surfaces of booths.

**Dust Cloth.** White cotton cloth of more body than cheesecloth. For use in cleaning and polishing finished wood surfaces and in cleaning booth lining.

**KS-2423 Cloth.** Cotton twill cloth. For use in cleaning shaft of swivel chairs.

**Commutator  
Brush:**

**517306 Westinghouse Brush.** For use with d.c. KS-5474 Fan.

**Commutator  
Brush Spring:**

**285409 Westinghouse Spring.** For use with d.c. KS-5474 Fan.

**Conduit Body:**

**34461 Pratt Deep Conduit Body** or approved equivalent. For use as housing for booth cutout switch on ceiling of booth.

**Conduit Body  
Cover:**

**34R14 Plate for Pratt Deep Conduit Body** or approved equivalent.

**Cover:**

**Cover P-465153.** For use with box assembly P-454421, part of 215A or 215B switch.

**Cutout Base:**

**62965 Plug Fuse Cutout Base** or approved equivalent. For use on the service wires supplying booth lighting equipment where regulations permit the use of a cutout on booths. (Bryant Electric Co. or General Electric Co.)

- Door Guide:** **Door Guide Pin, P-370138.** For use on doors of 5, 6 and 7 type booths. May also be used with door guide pin block as a replacement part for the guide pin on doors of 1 and 2 type booths.
- Door Guide Pin Block:** **Door Guide Pin Block, P-370165.** Phenol fibre slide for use with door guide pin, P-370138.
- Door Handle:** **1 and 2 Type Booth Door Handle.** Consists of two brackets and one tube. Each bracket requires two 1-1/4-inch No. 7 Oval Head or Flat Head Blued Wood Screws for attaching.
- Door Hinges:** **Booth Door Hinge, KS-6493.** Upper booth door hinge drilled for mounting pivot rod or 15A rod on 1 and 2 type booths.
- Booth Door Hinge ESO-303051, Detail 6A.** Two lower booth door hinges on 1 type booths.
- Booth Door Hinge P-370324.** Upper booth door hinge for 5, 6 and 7 type booths.
- Booth Door Hinge P-370230.** Two lower booth door hinges for 5, 6 and 7 type booths.
- Booth Door Hinge P-370242.** Piano type booth door hinge for 5, 6 and 7 type booths.
- Door Lock:** **Booth Door Lock ESO-325865.** Used on 5 and 6 type booths where door lock is desired. (Booth to be provided with a lock should be ordered with lock.)
- Door Stops:** **Booth Door Stop P-370140 (finish).** Wood strip for small door section of 5, 6 and 7 type booths.
- Booth Door Stop P-370141 (finish).** Wood strip for large door section of 5, 6 and 7 type booths.
- Door Track Support:** **1 Booth Door Track Support (finish).** Support containing booth door track provided with 1-inch x 2-inch notch for 15A rod or pivot rod.

- Fan:** **KS-5474 Fan.** Small fan and guard equipped with cord and fittings for mounting and connecting in booths. List 1 for a.c. circuit and List 2 for d.c. circuit. For use in ventilating booths. When fan is to be installed in 7 type booth, order H & H RI-C Attachment Plug separately.
- Floor Coverings:** **Rubber Floor, P-370223.** Rubber flooring for 5 and 6 type booths.  
**Rubber Floor, P-370960.** Rubber flooring for 7 type booths.  
**Linoleum, KS-6850.** Linoleum flooring for 1 type booths.
- Glass:** **Door Glass, P-370135.** Glass for large door section of 5 and 6 type booths.  
**Door Glass, P-370136.** Glass for small door section of 5 and 6 type booths.  
**Door Glass, P-370110.** Glass for large door section of 7 type booths and for full length glass for large door section of 5 and 6 type booths.  
**Door Glass, P-370111.** Glass for small door section, and door frame of 7 type booths. Also for full length glass of small door section of 5 and 6 type booths.  
**Glass for Large Door Section of 1 Type Booth.** 9-1/4-inch x 36-inch x 1/4-inch commercial plate glass.  
**Glass for Small Door Section of 1 Type Booth.** 4-1/2-inch x 36-inch x 1/4-inch commercial plate glass.  
**Glass for Large Door Section of 2 type Booth.** 9-1/4-inch x 30-inch x 1/4-inch commercial plate glass.  
**Glass for Small Door Section of 2 Type Booth.** 4-1/2-inch x 30-inch x 1/4-inch commercial plate glass.  
**Glass for Side of 2 Type Booth.** 9-1/4-inch x 36-1/4-inch x 1/4-inch commercial plate glass.

**Glass for KS-6486 Card Frame.** (7-inch x 10-1/2-inch x 3/32-inch glass.)

**Graphite:** **Dixon's No. 635 Graphite.** For use with orange shellac as lubricant for booth door track.

**Keys:** **544A Key.** For use in locking and unlocking late type 1A light fixtures and 1B, 2B, 2C and 2D light fixtures.

**Key for 02157-B Subtreasury Lock.** For use in locking and unlocking early type 1A light fixtures. Key made by the Eagle Lock Company.

**Key for KS-6689 Lamp Guard.** For use in locking and unlocking globe type light fixtures in 1 and 2 type booths.

**Key for 2001-B Corbin Lock.** For use in locking and unlocking door on 52 and 53 type panels.

**Key ESO-325865.** For use with booth door lock ESO-325865 on 5 and 6 type booths.

**Lamp:** **Mazda Lamp.** (Min. 25 watts, max. 40 watts.) For use in 1 and 2 type light fixtures and globe type light fixtures. Use 25-watt lamp unless higher wattage is specified.

**Lamp Guard:** **Lamp Guard, KS-6689.** For use in 1 and 2 type booths. A cast iron base into which globe is screwed and is provided with a lock which prevents removal of globe without key.

**Lamp Guard Globe:** **Globe for KS-6689 Lamp Guard.** For use as a replacement part in 1 and 2 type booths. A glass globe 5 inches x 3-3/32 inches having a screw base which fits into lamp guard.

**Lamp Receptacle:** **Lamp Receptacle, KS-1342.** Part of 1 type light fixtures, and old globe type light fixture in 1 and 2 type booths.

**Lens:** **Lens, P-370250.** Part of 1 type light fixtures.

- Light Fixtures:**
- 1A Light Fixture.** For use in 5 and 6 type booths and modified 1 and 2 type booths. Consists of a rectangular metal, flush-type, face plate with ventilating slots and a milky white lens (P-370250), a KS-1342 lamp receptacle mounted in a KS-1308 receptacle box on a steel supporting member, and a back plate. Provided with a lock and mounting screws. Key must be ordered separately.
  - 1B Light Fixture.** For use in 7 type booths. Same as 1A light fixture except that finish of face plate is ivory instead of oxidized bronze.
  - 2B Light Fixture.** For use as a directory light. Consists of a metal shade provided with a pull chain lock socket. Provided with two wire connectors. 544A Key must be ordered separately, along with cable assembly P-239840 for connecting this fixture to the 1A light fixture.
  - 2C Light Fixture.** Same as the 2B light fixture except that the cable P-239840 is assembled to the fixture, the wires being solder spliced to the fixture wires.
  - 2D Light Fixture.** Same as 2C light fixture except that cable P-370292 is assembled to the fixture instead of cable P-239840. For use as a directory light on 7 type booth.
- Oil:** **KS-6232 Oil.** For use in lubricating fan bearings and swivel chair.
- Paint:** **Forest Drab Booth Lining Paint.** For use in retouching or refinishing lining of booths.  
**Valentine's Bell System 4-hour White Enamel No. 410015** or approved equivalent. For use in retouching or refinishing white metal ceilings of booths.
- Panels:** **Panel for (Code) Booth.** For 1 type booths only.  
 For panels used with 5, 6 and 7 type booths, see Part 2.
- Plastic Wood:** **Plastic Wood.** For use in plugging abandoned screw holes.

- Plugs:** **1/2-inch Knockout Plug.** For closing unused knockout openings in booth receptacle box.  
**H & H RI-C Attachment Plug.** For use on fan cable on 7 type booth and on cable P-370287.
- Plug Fuse:** **66331 Plug Fuse (10 Amp. 125 V.).** For use in plug fuse cutout base.
- Polish:** **Bell System Furniture Polish.** For use in polishing linings and finished wood surfaces of booths.  
**Bell System Paste Metal Polish.** For use in cleaning booth lining and finished wood surfaces of booths.
- Receptacle:** **Receptacle, Crouse Hinds 1705.** Plug attachment receptacle for use with C17 condulet in ceiling of 7 type booth.
- Relay:** **171B Relay.** For use in controlling booth light from local contacts on P.B.X. apparatus.
- Rod:** **15A Rod.** For use in operating the 204A switch. Provided with mounting screws (3/8 inch 8-36 R.H. Iron Mach. Screws (P-370318) and lock washers (P-370321).  
**Pivot Rod, P-465154.** For use as replacement part of 215A or 215B switch. Provided with mounting screws (1/4 inch 8-36 R.H. Iron Machine Screw P-206519) and 1208 Shake-proof lock washers.  
**Rod, P-465155.** For use as replacement part of 215A switch.  
**Rod, P-466974.** For use as replacement part of 215B switch.
- Roof Assemblies:** **Roof Assembly, P-370194.** (Unfinished.)  
**Roof Assembly, P-370195.** (Dark Mahogany Finish.)  
**Roof Assembly, P-370196.** (Medium Mahogany Finish.)

**Roof Assembly, P-370198.** (Walnut Finish.)

Note: The above roof assemblies are for use on 5 and 6 type booths. Each roof assembly consists of a metal ventilator mounted on a wood roof stained to match booth finish and given two coats of shellac, or furnished unfinished. These roof assemblies will also fit 1 type booths.

**Sandpapers:**

**No. 00 Sandpaper.** For use in refinishing lining of booths.

**No. 1-1/2 Sandpaper.** For use in refinishing lining of booths.

**Screws:**

**1/4 inch No. 6-40 R.H. Brass Machine Screw.**

**1/4 inch No. 8-36 R.H. Iron Machine Screw, P-206519.**

**3/8 inch No. 8-36 R.H. Iron Machine Screw, P-370318.**

**1/2 inch No. 8 R.H. Blued Wood Screw.**

**3/4 inch No. 8 R.H. Brass Wood Screw.**

**3/4 inch No. 8 R.H. Bright Wood Screw.**

**3/4 inch No. 8 R.H. Blued Wood Screw.**

**1 inch No. 14 R.H. Blued Wood Screw.**

**1-1/4 inch No. 7 OV.H. (or F.H.) Blued Wood Screw.**

**1-1/4 inch No. 10 F.H. Brass Wood Screw.**

**1-1/4 inch No. 14 R.H. Blued Wood Screw.**

**1-1/2 inch No. 9 R.H. Oxidized Wood Screw, P-370304.**

**1-1/2 inch No. 10 F.H. Bright Wood Screw.**

**1-1/2 inch No. 14 R.H. Blued Wood Screw.**

**Seat:**

**101T Seat.** For use in 1 and 6 type booths.

**Separators:**

**Separator for (Code) Booth.** For 1 type booths only.

For separators used with 5, 6 and 7 type booths, see tables, Part 2.

- Shellac:** **Orange Shellac Varnish per Specification 6418.** For use with graphite as lubricant for door track.
- Shelves:** **14T Shelf.** A wood shelf finished to match standard booth fittings. For use with 52 and 53 type panels in 5 type booths.
- 15A Shelf.** A formed metal shelf having an oxidized bronze lacquer finish. For use in 1, 2, 5 and 6 type booths as arm rest and writing shelf.
- 16A Shelf.** A formed metal shelf having an oxidized bronze lacquer finish. For use in booths when a package rack is required.
- Soap:** **Bell System Powdered Soap** or approved equivalent. For use in cleaning finished wood surfaces of booths and in cleaning booth lining.
- Surface Cabinet:** 4-1/2-inch x 5-inch x 3-inch Surface Cabinet (Manufactured by Columbia Metal Box Co.). For use as housing for plug fuse cut-out on ceiling of booth.
- Switches:** **140A Switch.** (Manufacture discontinued.) Stocks will not be replaced except from recoveries. For use in operating light in 1 and 2 type booths.
- 204A Switch.** For use in operating booth light.
- 215A Switch.** For use in operating booth light on 1, 5 and 6 type booths. Consists of No. 2-33 KRI Unsensitized Mercury Switch and bracket assembled in a metal box and furnished with rod P-465155, pivot rod P-465154, and fittings, screws and washers to attach switch to 1A light fixture and booth door.
- 215B Switch.** For use in operating booth light on 7 type booths. Same as 215A Switch except that rod P-466974 is furnished instead of rod P-465155.
- 7241 Cutler Hammer Door Switch** or approved equivalent. For use as the electrical switch replacement part for 140A switch.

**GE-1689 Tumbler Switch** or approved equivalent. For use in the electric service wires to booth lighting equipment where regulations permit use of booth cutout switch.

**G.E. Vapor Lamp Co. No. 2-33 KRI Unsensitized Mercury Switch** or approved equivalent. For use as the electrical switch replacement part for a 215A or 215B switch.

**Hubbell 6064-B Toggle Switch** or approved equivalent. For use in controlling fan operation in 7 type booth.

**Thinner:** **Shellac Thinner:** For use in thinning lubricant for booth door track.

**Tread:** **Tread, KS-6690.** For use as door tread in 1 and 2 type booths.

**Ventilator:** **Ventilator, P-370217.** For use on roof of 5, 6 or 7 type booths, or converted booths.

**Washer:** **Washer, P-216278.** Fibre washer, Part of 215A or 215B switch.

**Lock Washer, P-370321.** Part of 15A Rod.

**1208 Shake Proof Lock Washer.** Part of 215A or 215B switch.