

BELL SYSTEM PRACTICES
Station Installation and Maintenance

ADDENDUM C52.206
Issue 1, 8-15-38
AT&T Co. Standard

TELEPHONE BOOTHS

1, 2, 5, 6 AND 7 TYPES

INSTALLATION

1. GENERAL

1.01 This addendum is issued to cover the installation of the KS-8164 telephone booth ventilator in Nos. 1, 2, 5, and 6 type booths.

2. INSTALLATION

2.01 Remove the connector from the ventilator fan cable and install the ventilator as shown in Figs. 1 and 2 of this addendum. After fastening the connector in place in the booth lamp receptacle, thread the fan cable through it and attach the cable conductors to the receptacle terminals as shown in Fig. 11 of Section C52.206.

3. MAINTENANCE

3.01 The KS-5541 fan may be removed for replacement or other reasons without removing the corner bracket, by unscrewing the three special screws fastening the spider ring to the bracket. A KS-8187 wrench is required for this purpose.

3.02 The switch in the base of the bracket is also replaceable without removing the fan assembly from the booth.

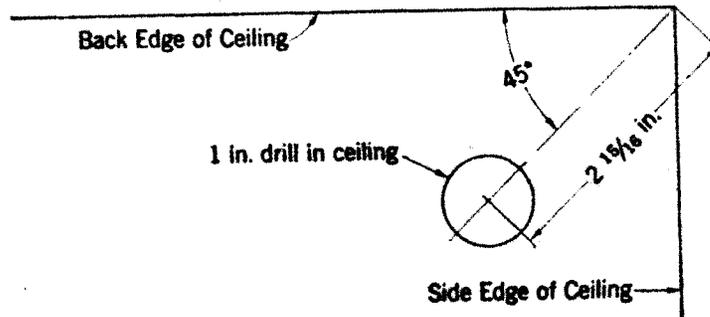


Fig 1—Location of Mounting Hole in Booth Ceiling

Note: Where ceiling is metal-lined, use a 1 inch hole saw such as made by the Stanley Works of New Britain, Conn. or an approved equivalent and then complete operation with a 1 inch wood bit.

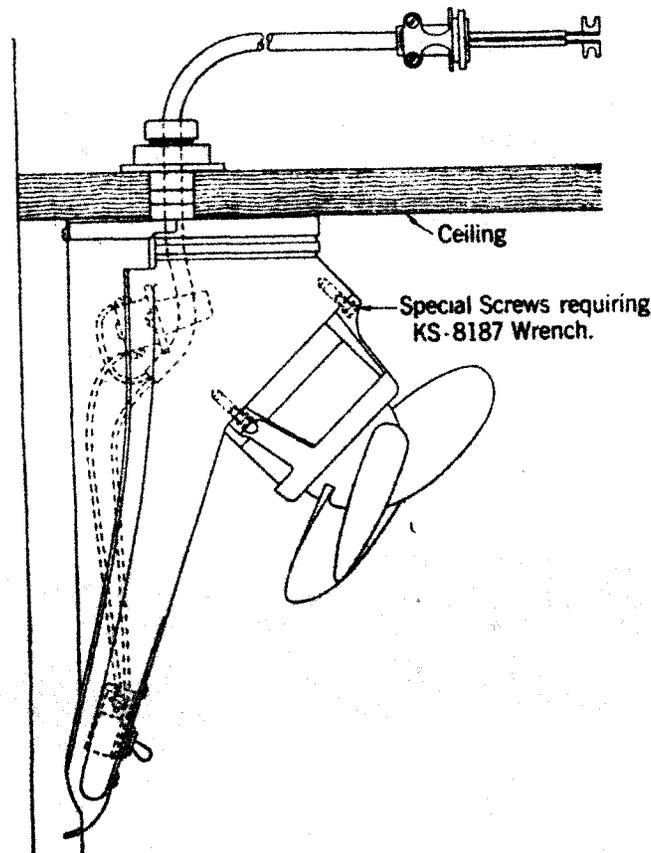


Fig. 2—Ventilator in Place